

Great Lighting

大 燐 照 明

ABOUT US

關於大燁照明

Jiashan Greatlighting Co. Ltd. is located in Jiashan National Economic Development area, was founded in 2008. it is a company integrating production, research and development, trade, and service as one professional lighting company.

After more than ten years of development, Greatlighting has established a branch in Taiwan in 2020.

Since the development of the company for over 10 years, we have established with internationally renowned designer and have completed the projects of Google in Shanghai, Lego in in Shanghai, Abbott in Shanghai, NIKE Flagship Store in Shanghai, Linkedin in Shanghai, Steelcase in Shanghai, Alibaba in Hangzhou, Alibaba in Guangzhou etc.,

To keep pace with the times, forward thinking and innovation is the power. We think lighting not just only light, we believe it cover we life , happiness, quality. like the sun that warm us when winter is coming, like the moon that guide us home when night is coming, trust light will make us have a better life, development excellent light quality and high quality service are Greatlighting first priority.

嘉善大燁照明有限公司位於嘉善國家級經濟開發區，成立於2008年，是一家集生產、研發、貿易、服務於一體的專業照明公司。

經過十餘年的發展，大燁照明在2020年台灣設立了分公司。

在深耕十餘年下來的同時，我們與國際知名設計師緊密合作配合，並且完成了許多知名項目，如上海谷歌、上海樂高、上海亞培、上海首家NIKE旗艦店、上海領英、上海Steelcase、杭州阿里巴巴、廣州阿里巴巴....等等。

與時俱進，前瞻創新是動力，我們認為照明不僅僅是光，我們相信它涵蓋了我們的生活、幸福、品質。就像冬天來了溫暖我們的太陽，就像夜幕降臨時引導我們回家的月亮。相信光會讓我們擁有更美好的生活，發展優良的光品質和優質的服務是大燁照明的首要任務。

WE HAD COOPERATE WITH



TO BE CONTINUED

ABOUT QUALITY 關於品質

Quality is the life of an enterprise, and the company has a complete Good quality anagement system, set quality inspection standards accurate, customized strict shipping standards and improved quality control documents (such as forms, procedures, specifications, etc.)

So that all products have standards. The quality is all carried out according to the standards, so that the quality can be followed by a book, and the quality is carried out according to the book, so as to be a comprehensive system. The guarantee of quality allows our products to have a broader market, satisfying customers and achieving long-term successful cooperation.

品質作為企業的生命，公司擁有了完善品質管理系統，設定了品質檢驗標準，定制了嚴格的出貨標準，完善了品控文件（如表格，流程，規範等等）。

讓所有產品都有標準品質，全部以標準進行，讓品質有冊可依，依冊而行，從而全面系統。品質的保證讓我們的产品市場更廣闊，讓顧客滿意而達到長期成功的合作。



Automatic solder paste printing machine




4 Four machines: YAMAHA from Japan the most sophisticated SMT machine in the world



Reflow soldering



Automatic PCB welding machine

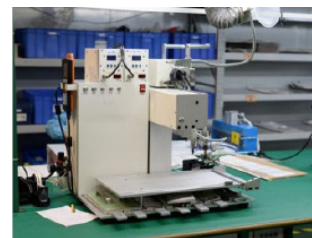

Automatic wire welding machine



40 Aging lines



Reel machine



Package lines



Microscope
Observe the LED sources are intact




Constant temperature and humidity chamber (-20°C ~ 50°C)
Test fixtures performance in harsh environment



LED electric oven
Remove the moisture from the LED sources, to keep the good stability of the LEDs, otherwise, with the moisture inside the LED, the LED easy to broke during usage




Vibration test table
Vibrate the finished products , for testing the stability of the products



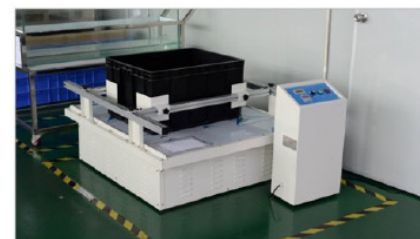


Transportation vibration testing machine
Test the reliability of package




Other detection devices

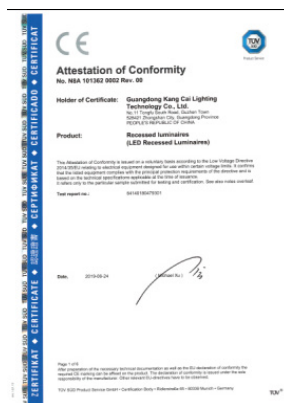

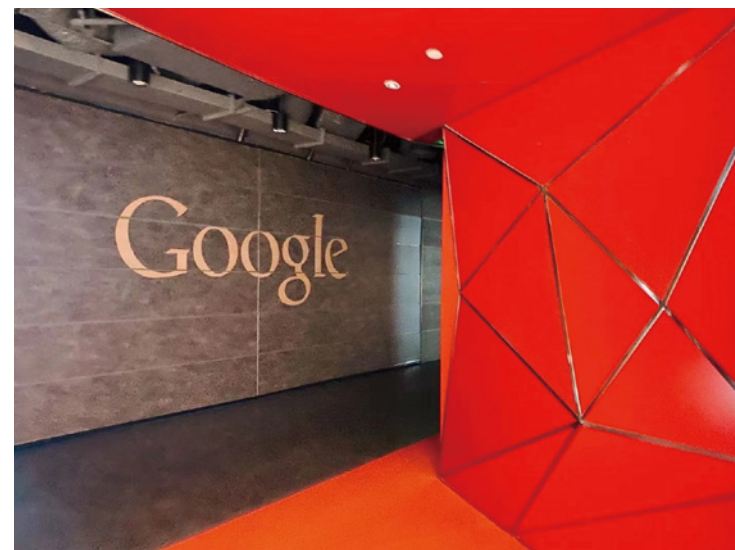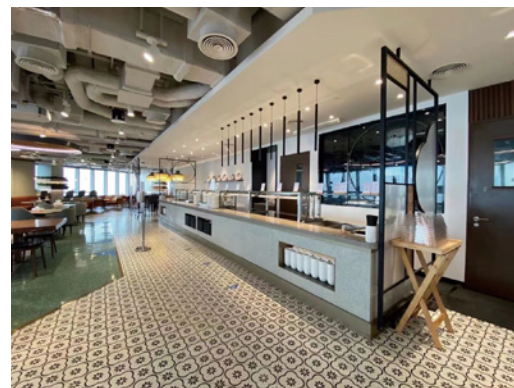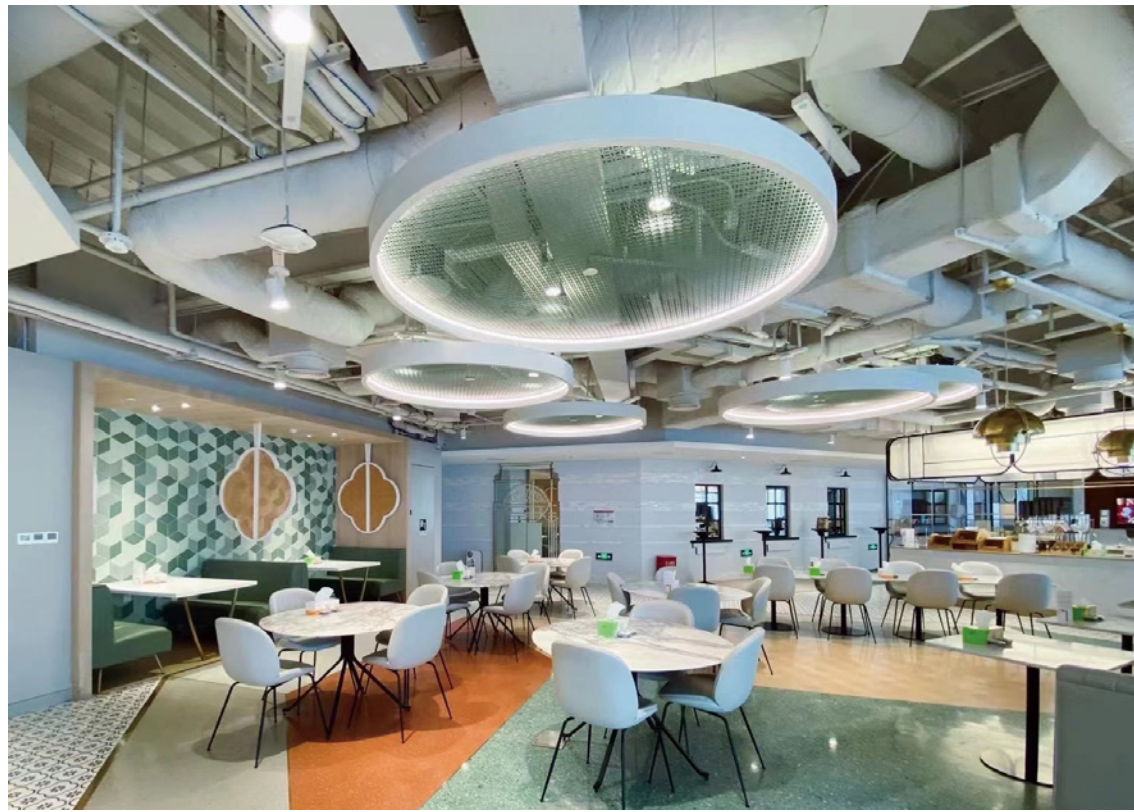

Shanghai
Google Office SH 谷歌上海辦公室
Robarts spaces & Studio illumine



THE MICHELIN GUIDE: 3 MICHELIN Star Restaurant

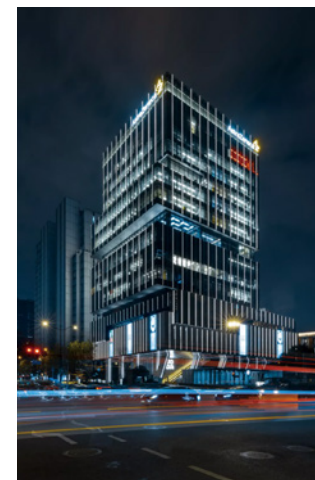

UCCA Edge Shanghai

NEWWAVE by DA VITTORIO


Linehouse & Studio illumine

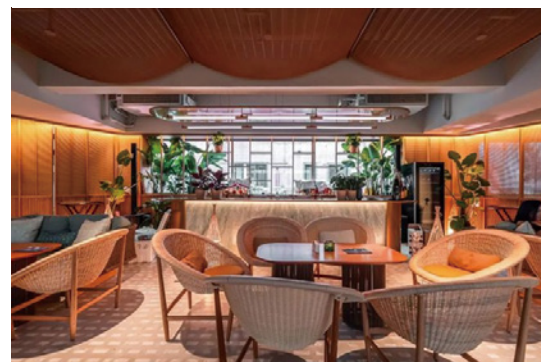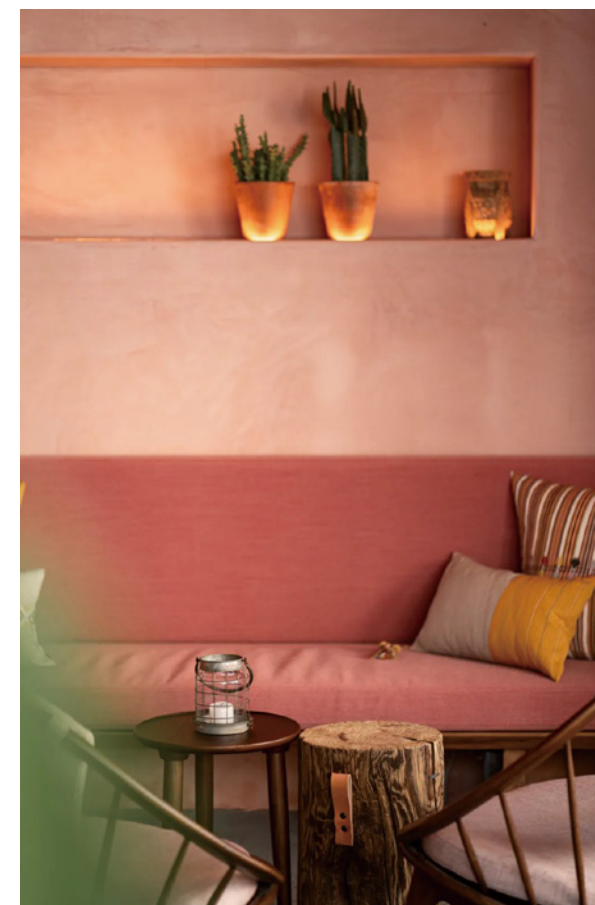

AUNN Shanghai

Bonica & La Barra & Mezcaleria & Tacos El Paisa

Armada Group

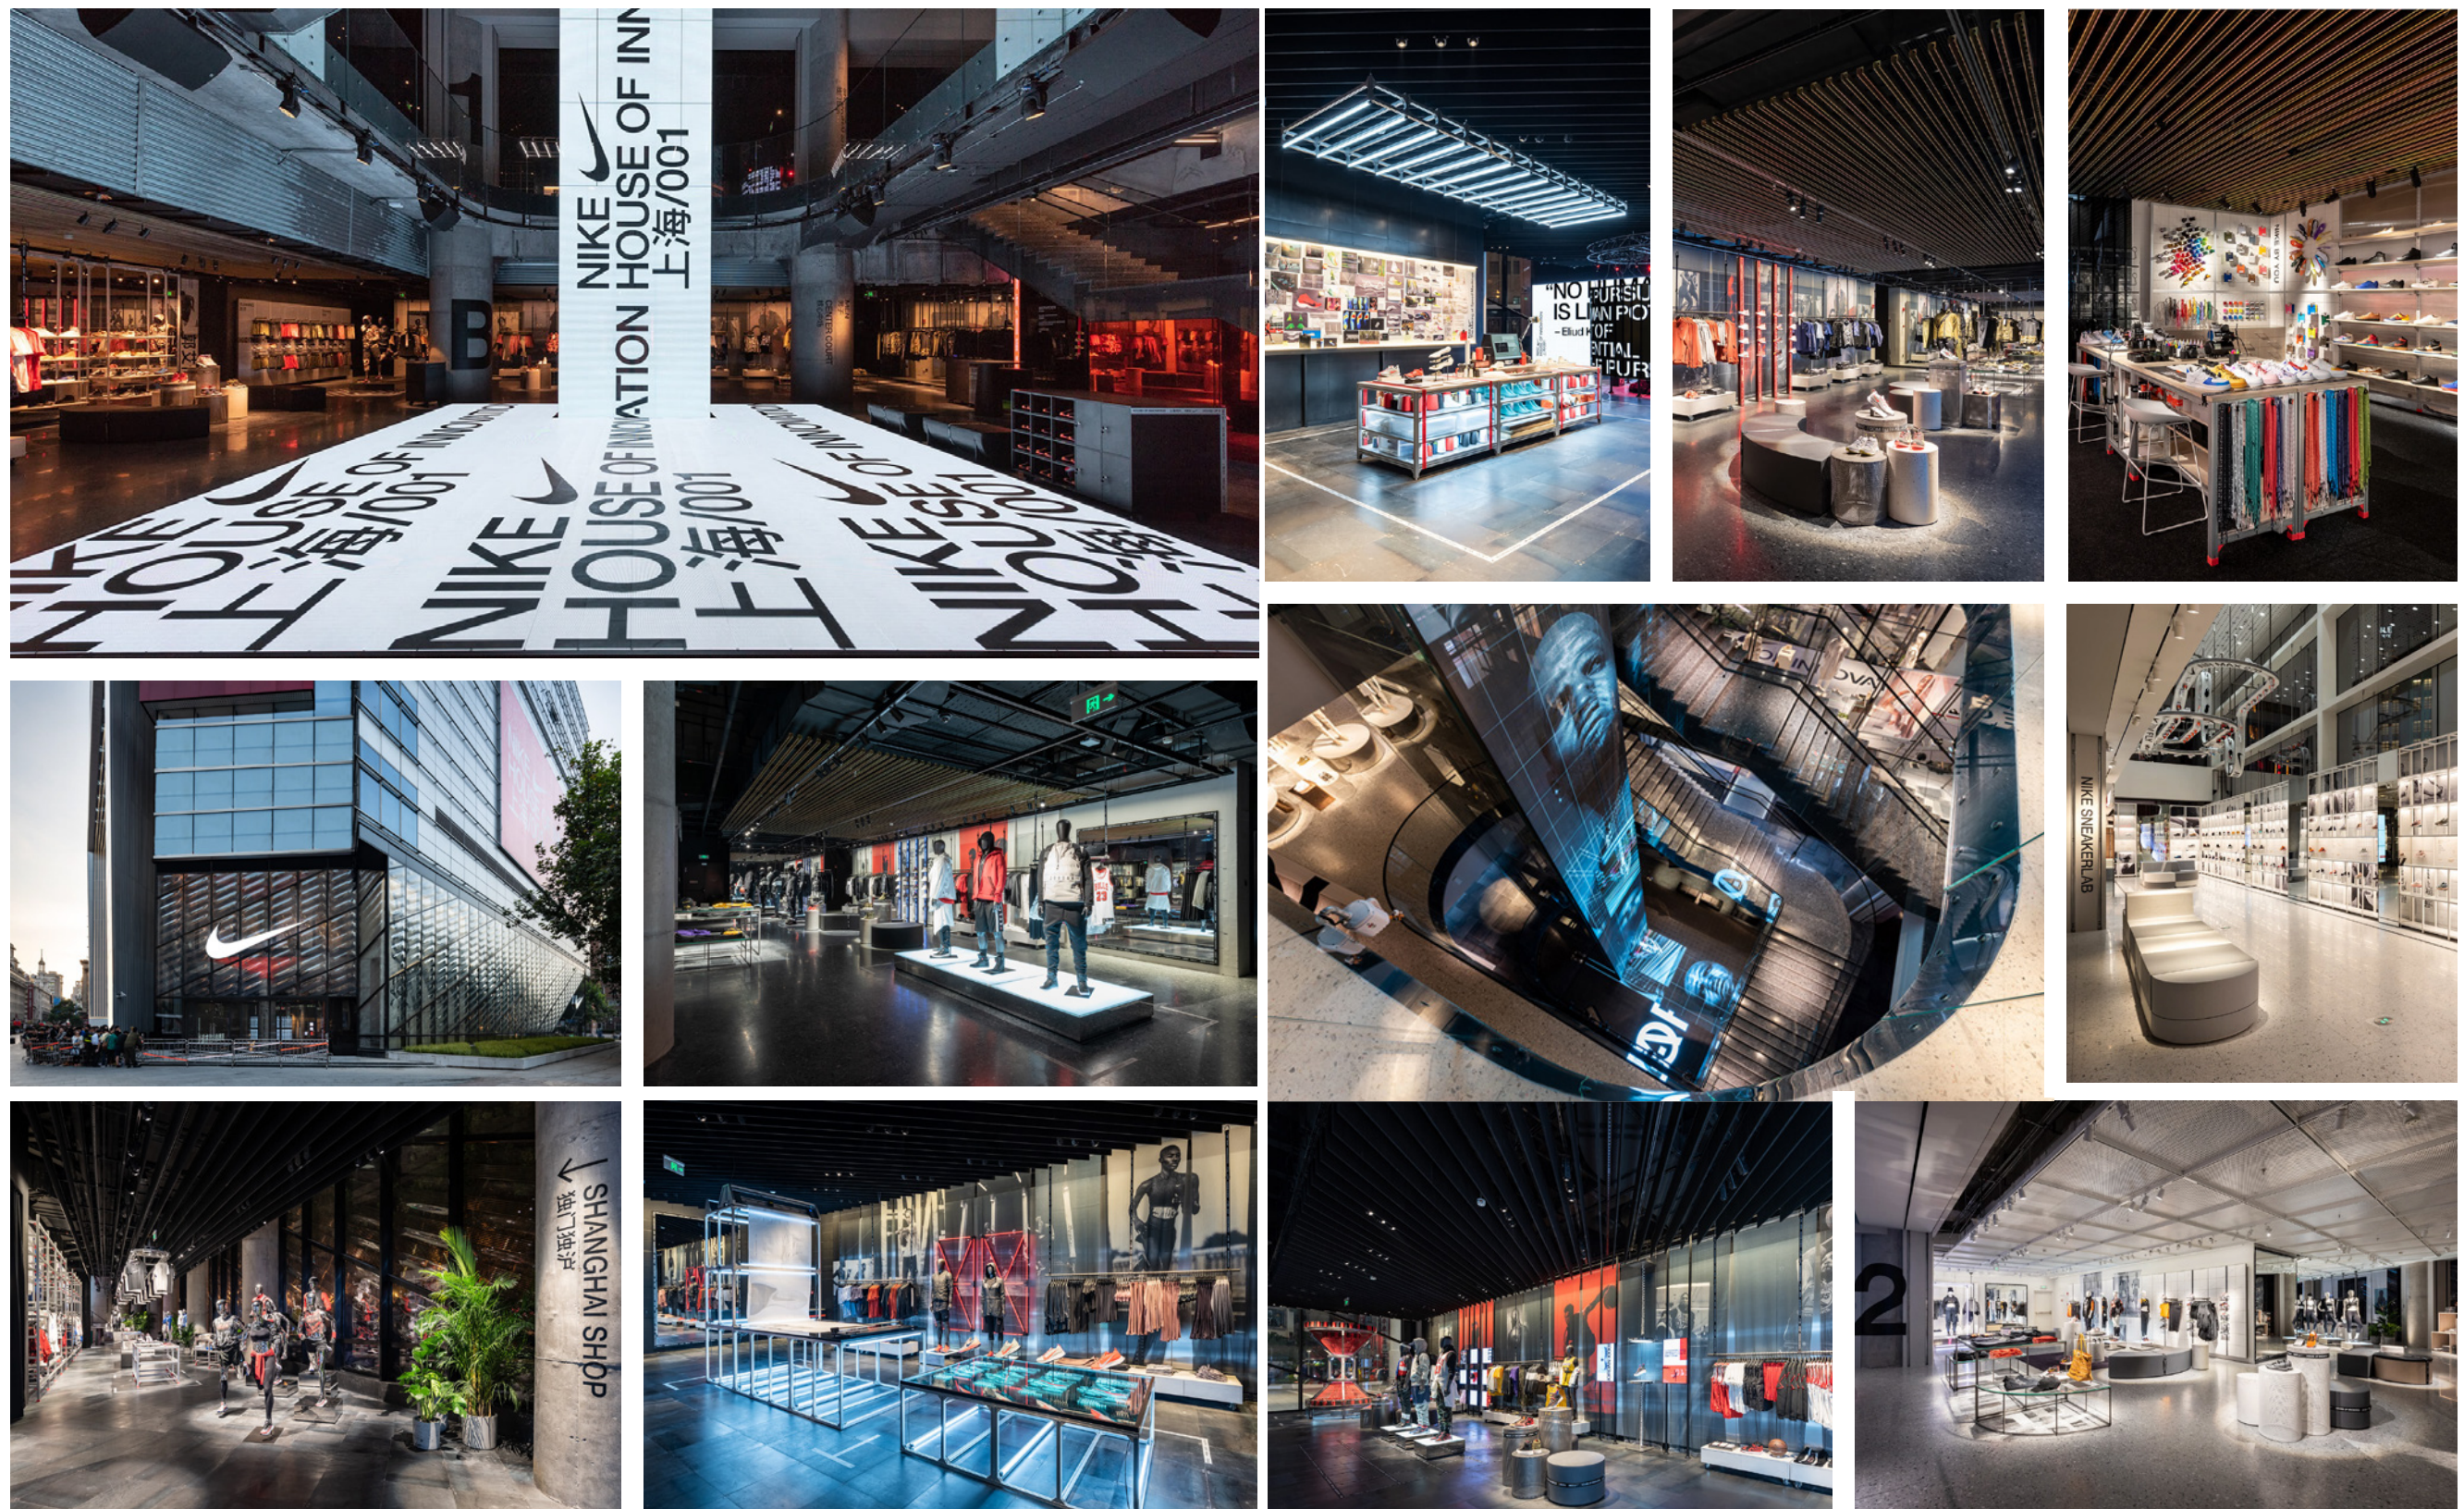




Shanghai

Nike House of Innovation NIKE上海001

Nike Retail Group, CallisonRTKL & Studio illumine



Beijing
WAB Academy 北京京西學院
 anySCALE & Studio illumine

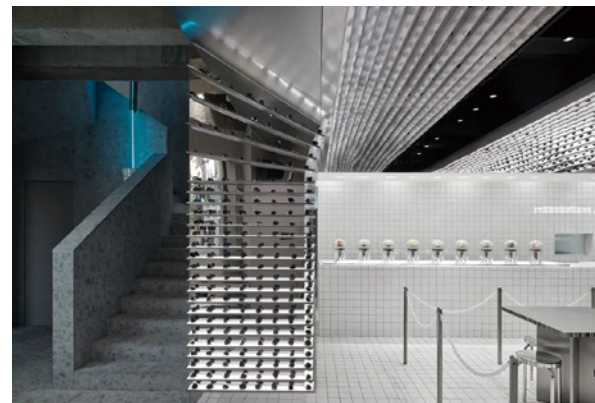
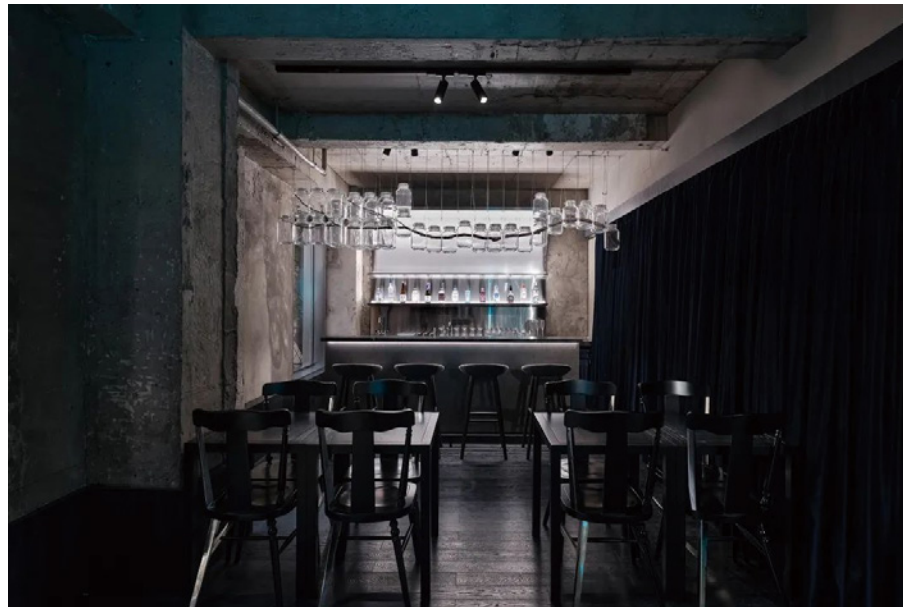







Shanghai
Black Star Pastry
 Linehouse & Studio illumine

THE MICHELIN GUIDE:3 MICHELIN Star Restaurant






Shanghai
ROODOODOO by Paul Pairet 滬嘟嘟
Hcreates interiors & design







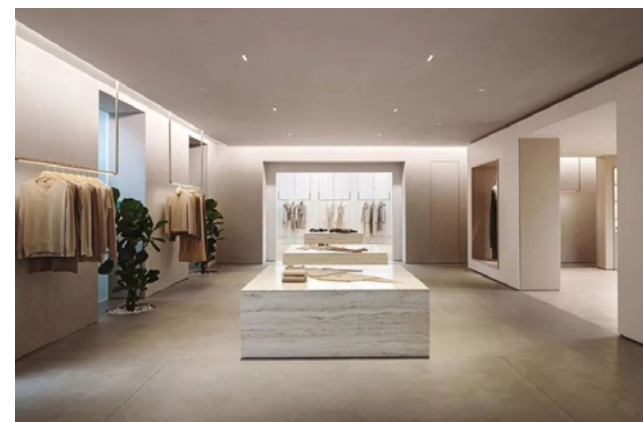
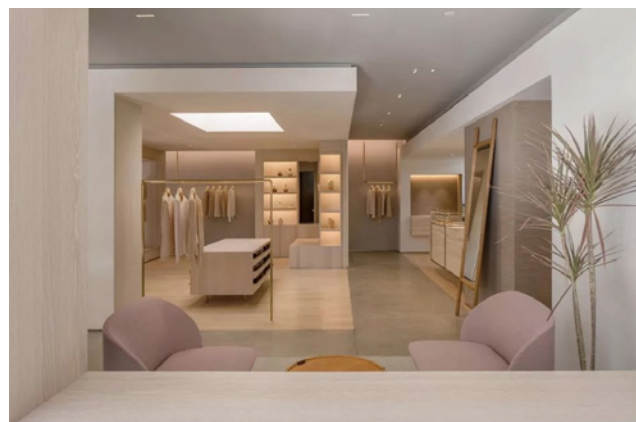


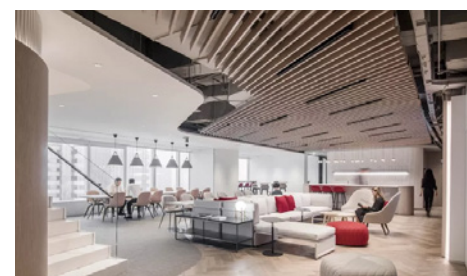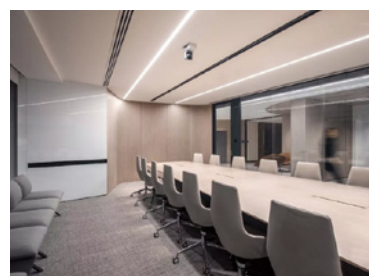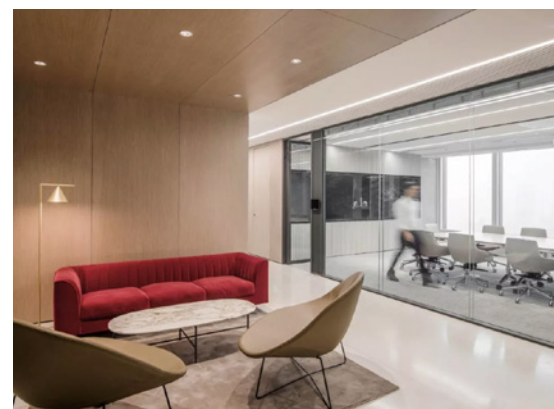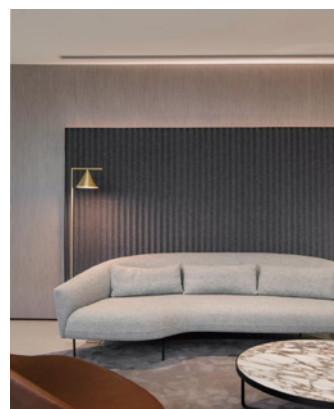

Shanghai
Bain Capital 貝恩資本
 Robarts spaces & Studio illumine



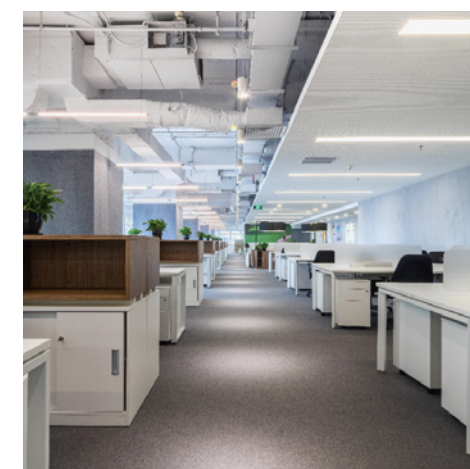
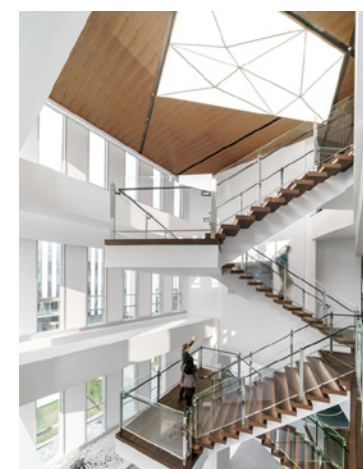
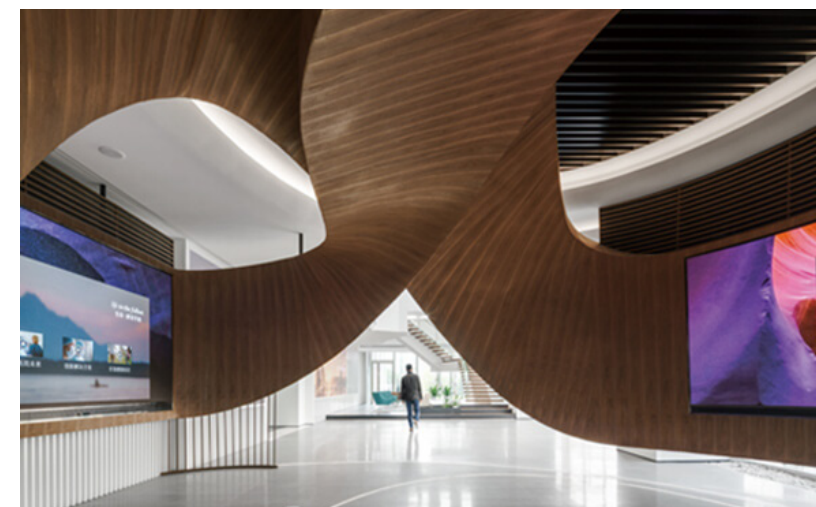


Shanghai
ABBOTT 雅培
 Robarts spaces & M Moser Associates & Studio illumine

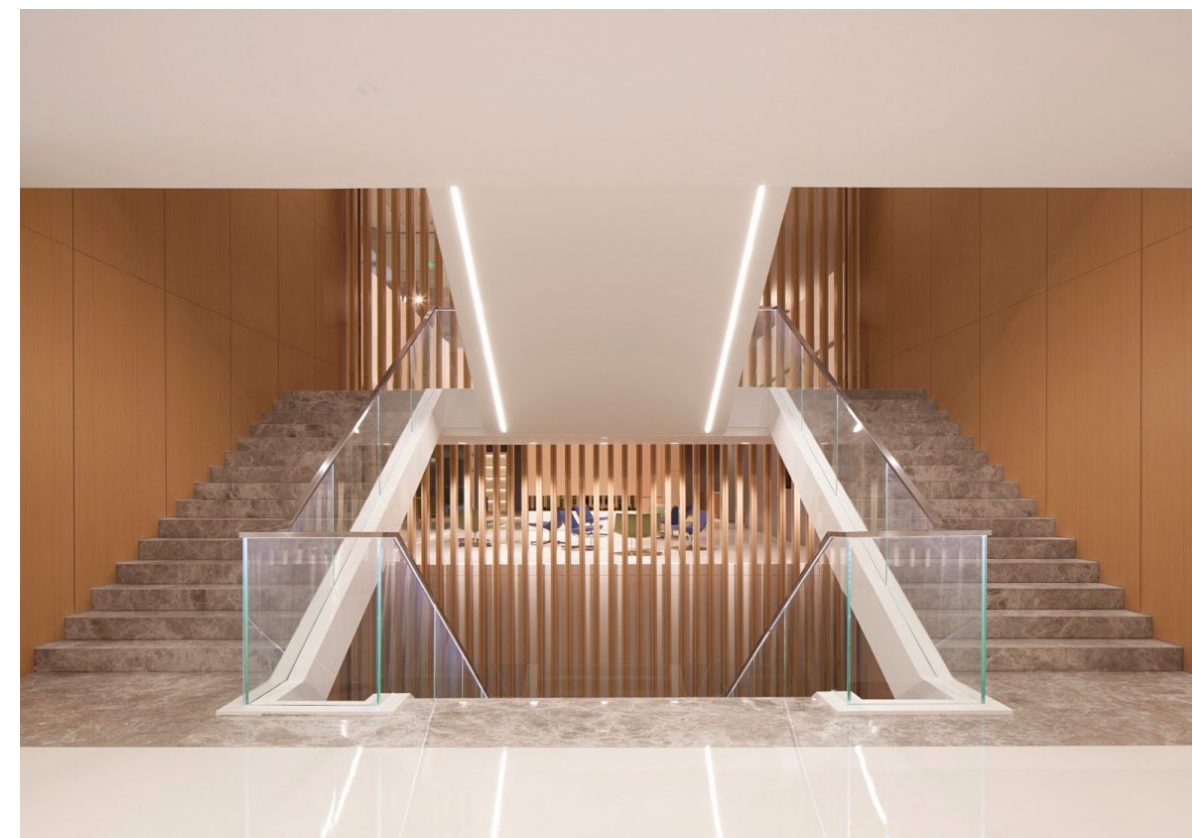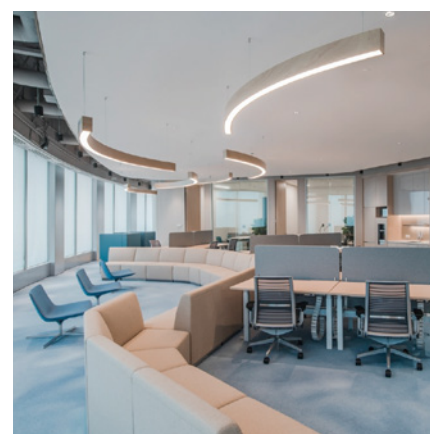
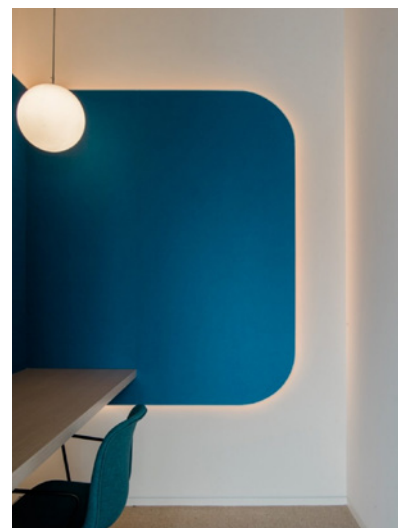
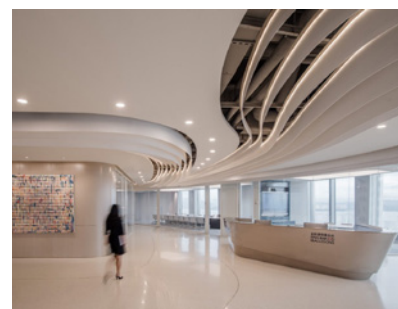
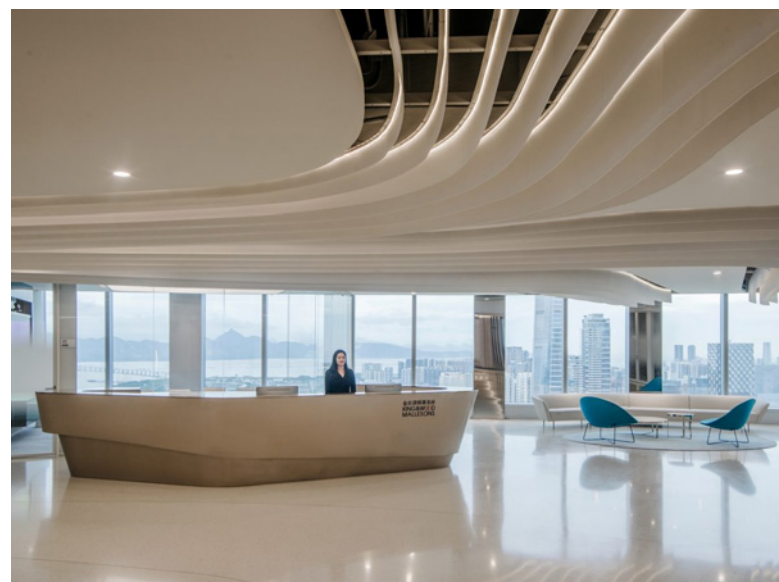


Guangzhou
King&Wood Mallesons 金杜律師事務所
 Robarts spaces & Studio illumine








Shanghai
APP (sinarmas) 金光集團中国總部
 Robarts spaces & Studio illumine

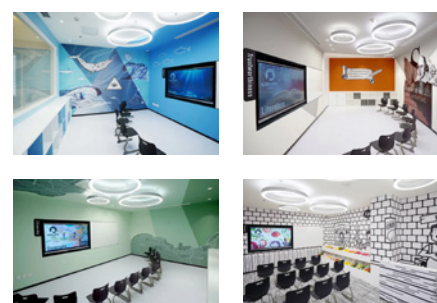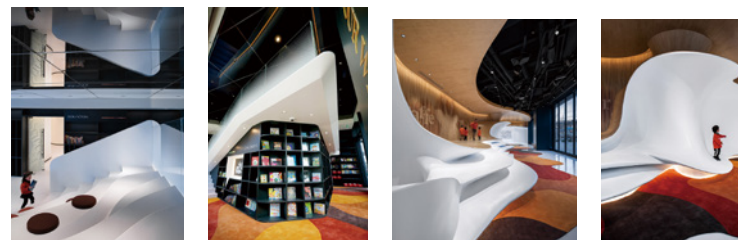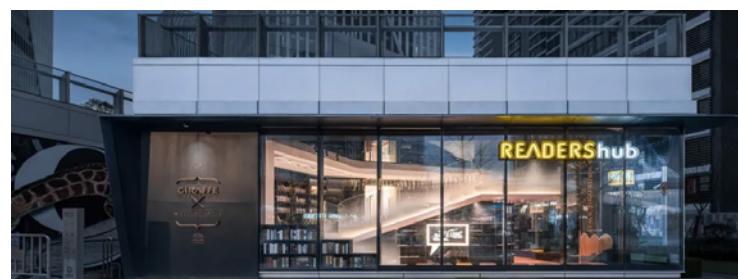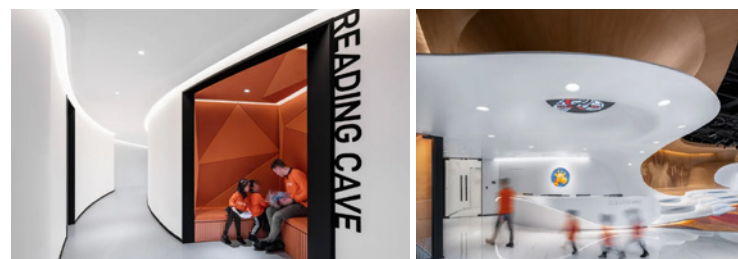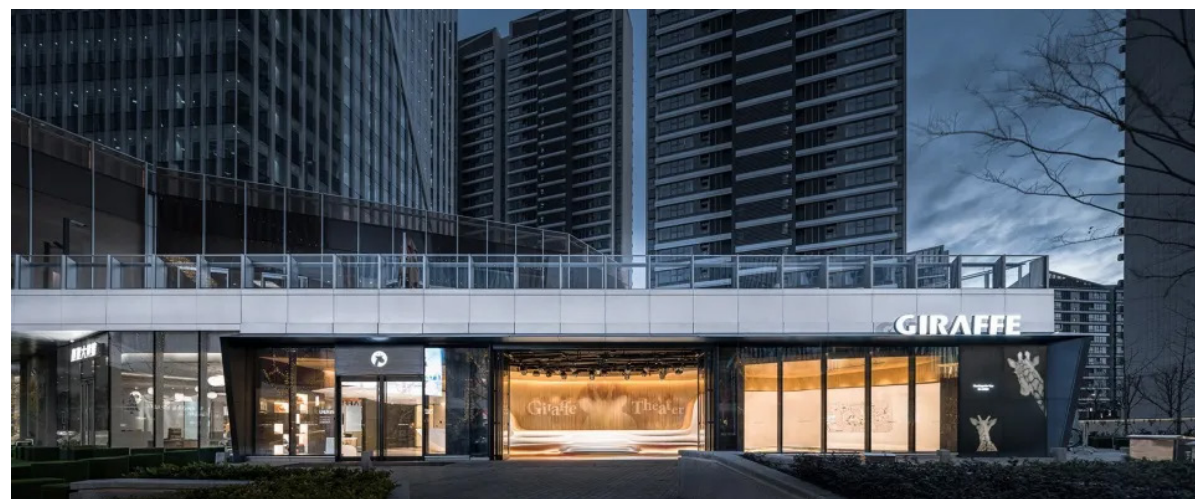

Shanghai
Giraffe School 长颈鹿美语
 Robarts spaces & Studio illumine

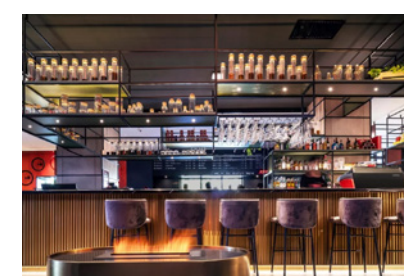

Beijing
CITIGO 北京三元桥
 MoHen Chao Design 赵牧恒

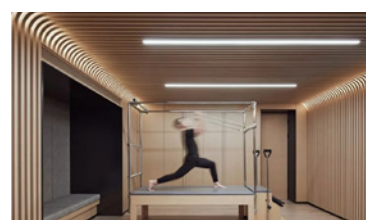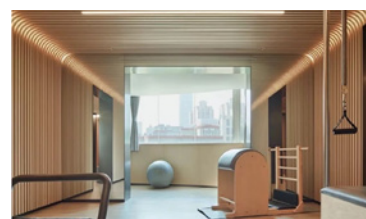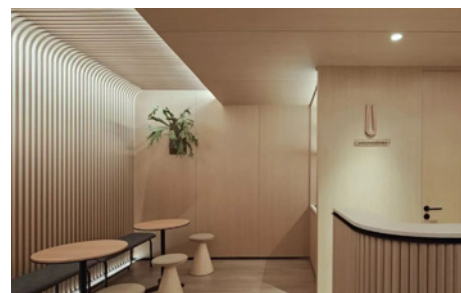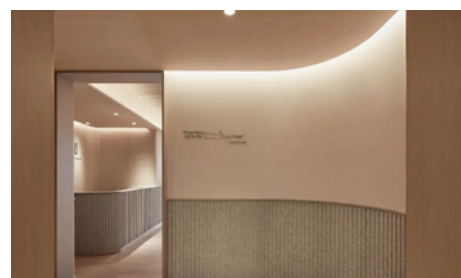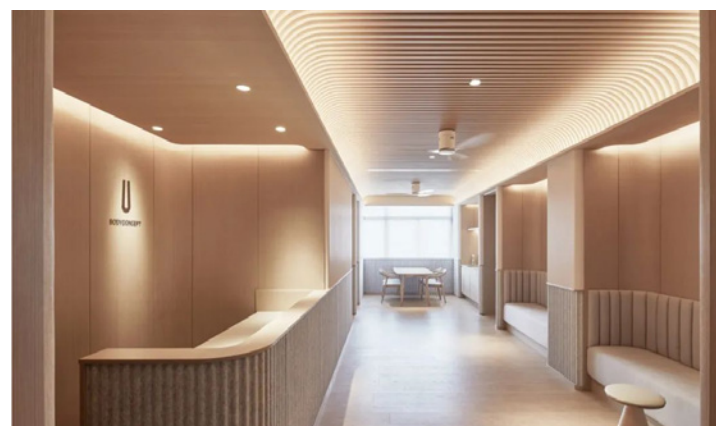

Shanghai



BodyConcept Pilates Studio 普拉提工作室

Vermilion Zhou Design Group 朱周空間設計



Beijing

Haidilao Smart Restaurant 海底捞智慧餐廳








Vermilion Zhou Design Group 朱周空間設計

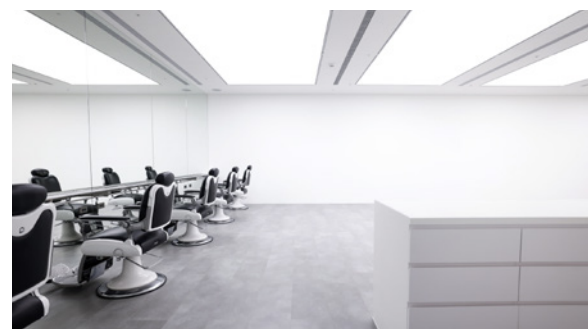


Taipei
Sculptor barber 理髮美術館
 UNION ATELIER 合事設計

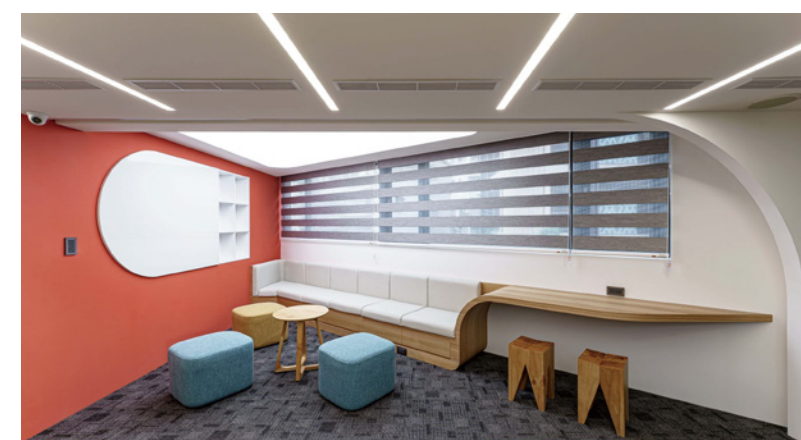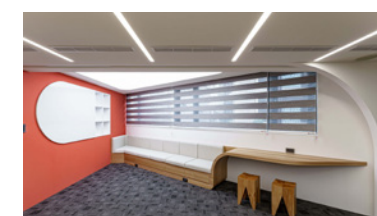



Taipei
FamilyMart office 全家便利商店辦公室
 Pailey Interior Design

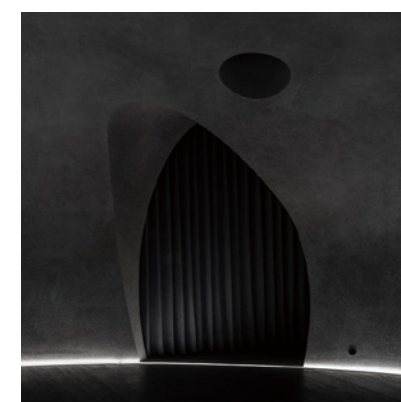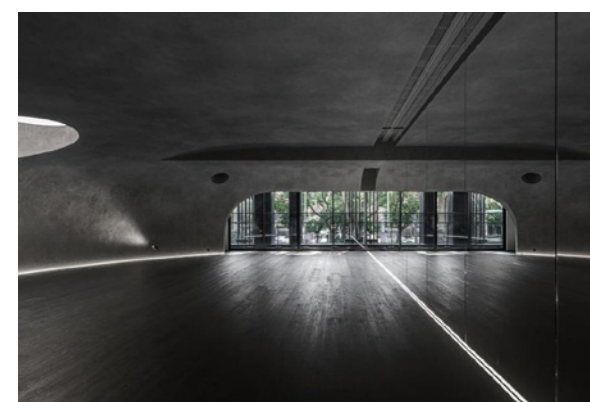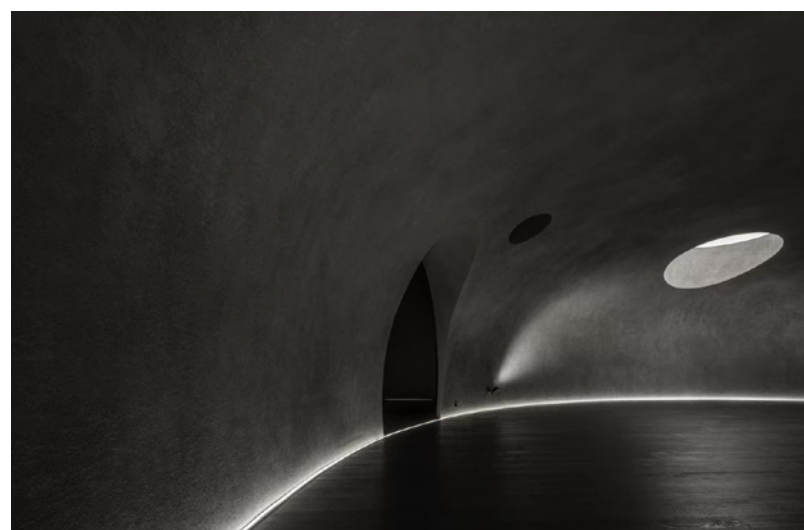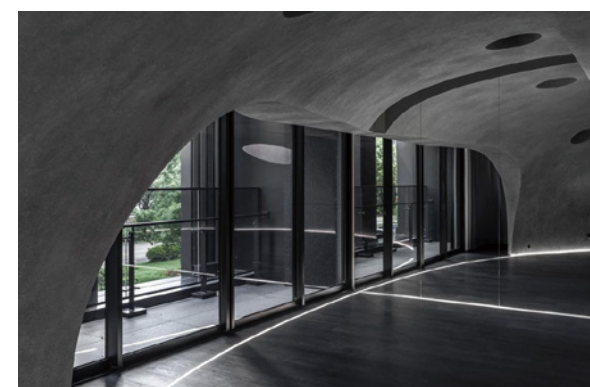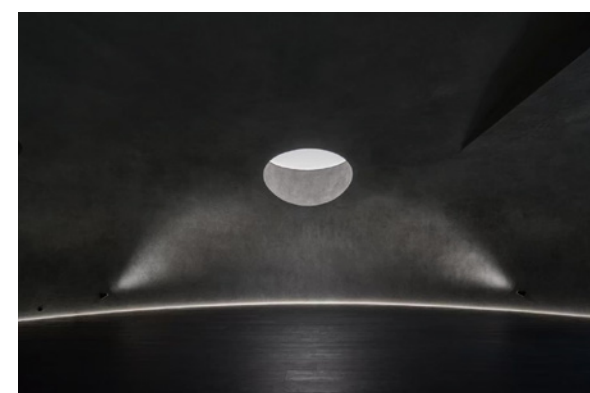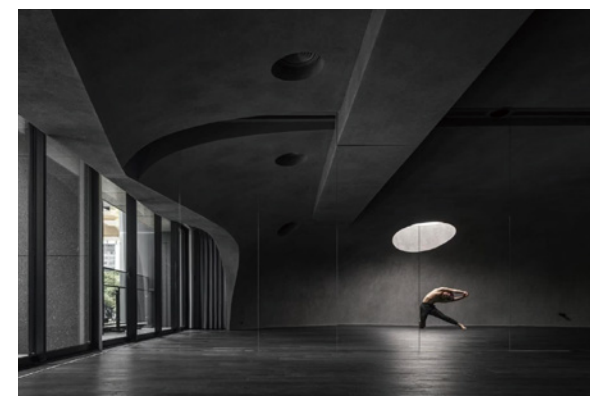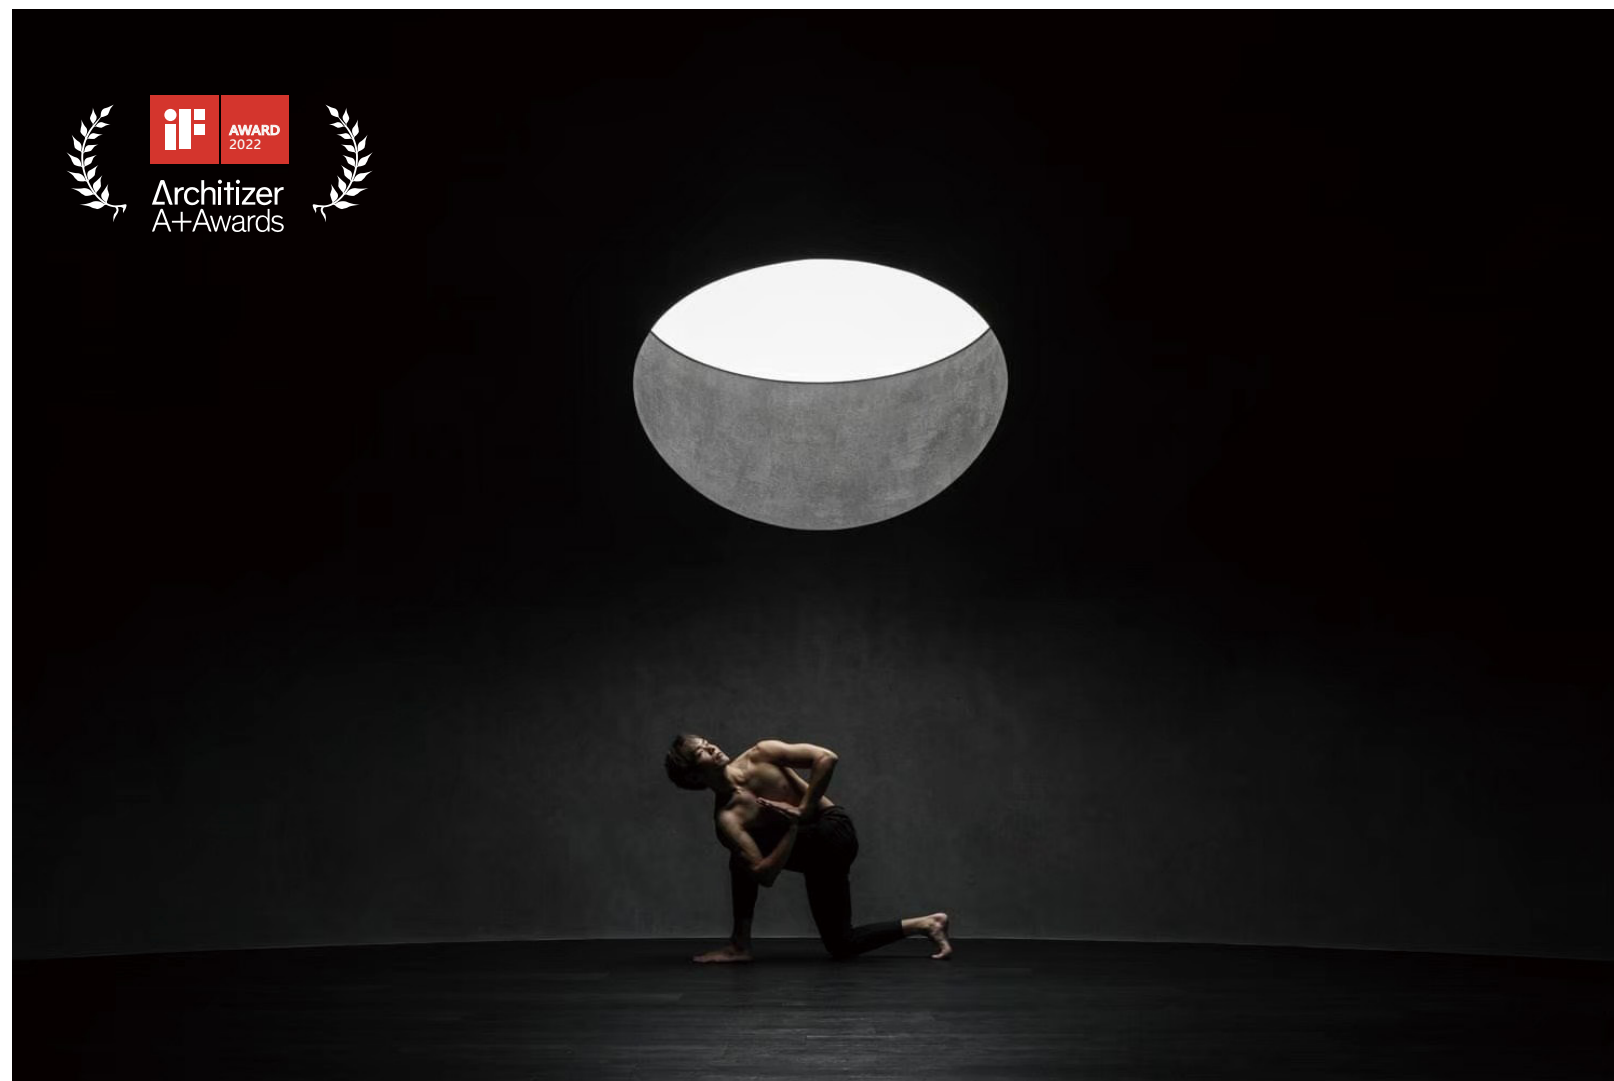







Taipei
Self-Revealing 隱世修煉
StudioX4 乘四建築

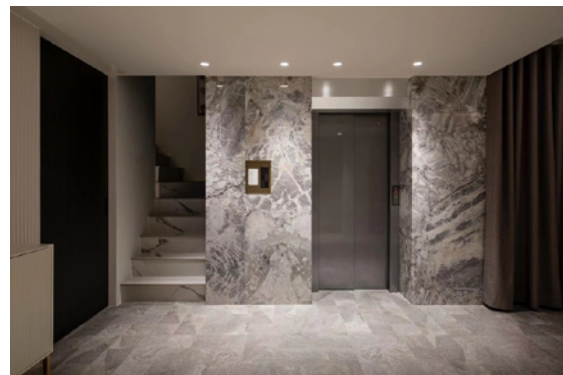

Taichung
Tipsy 微醺 赫里翁私宅
 HÖmu Design Studio 禾畝設計

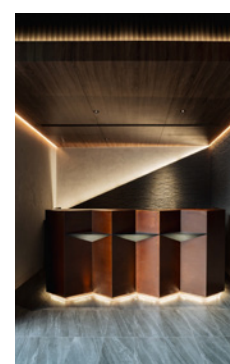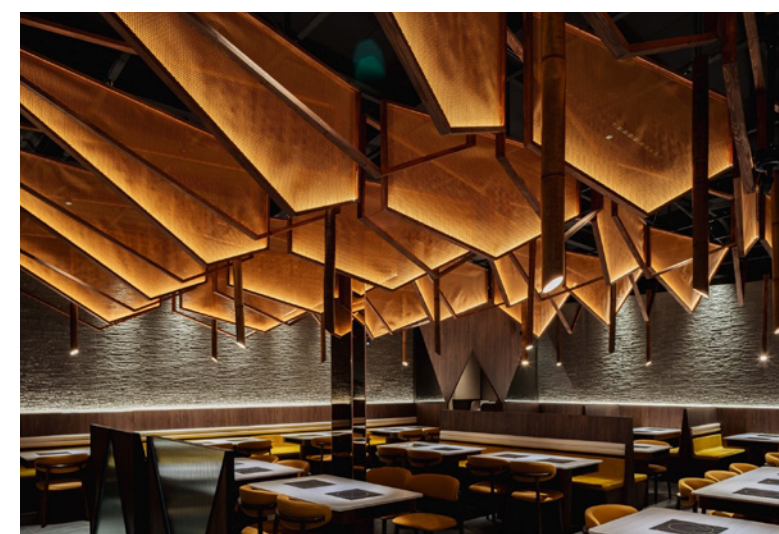

Taichung
Sukiyaki 北澤壽喜焼
 Sky eye league 晴天見設計

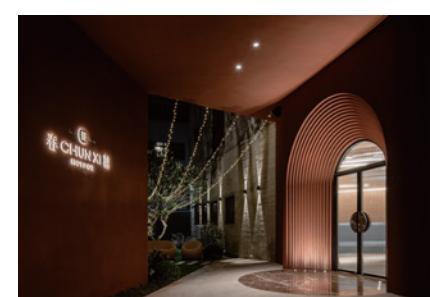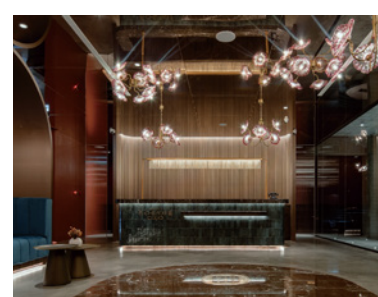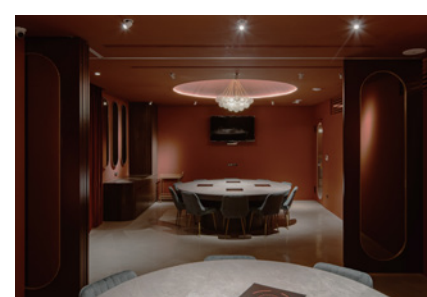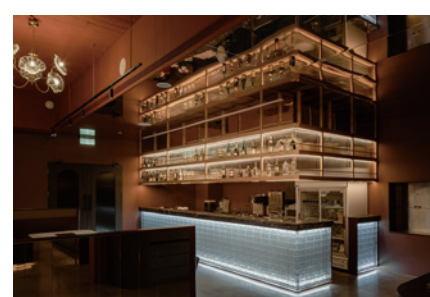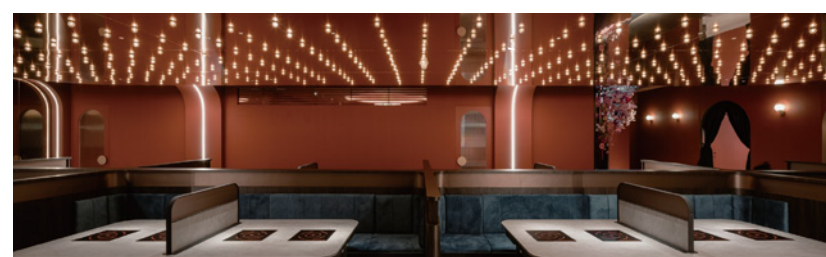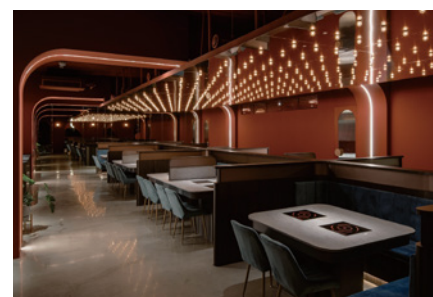

Taichung
CHUN XI 春囍打邊爐
 Sky eye league 晴天見設計

LINEAR



GL-BW0709



GL-BW1010



GL-BW1010B



GL-BW1010BB



GL-BW1613



GL-BW2613



GL-CH1911K



GL-BW2020B



GL-BW1616C



GL-CH3030C



GL-HO3030K



GL-BW3535



GL-BW4043



GL-BW5035



GL-BW5050



GL-BW-T30



GL-BW-T60



GL-BW-T120



GL-SW2109



GL-SW2409

REFLECTION LINEAR



GL-QSG4118



GL-QSG4118B



GL-QSG3825



GL-QSG3820



GL-QSG4320



GL-QSG8556



GL-QSG8556B



GL-QSG2655



GL-QSG2696



GL-QSG10037



GL-QSG11637



GL-QSG3596



GL-QSG3212B



GL-QSG9214



GL-QSG12055-2525C



GL-QSG7058

HIGH VOLTAGE



GL-SW-COB-110V
(IP65)



GL-SW-COB-220V
(IP65)



GL-SW-2835W60-110V
(IP67)



GL-SW-2835W60-230V
(IP67)

LED STRIPS



GL-2835-125L-5MM



GL-SW2835-120L-8MM



GL-SW2835-224L-10MM



GL-SW2835-320L-24MM



GL-2835-60L-8MM



GL-SW-COB-400-5MM-24V



GL-SW5050-60L-RGB



GL-SW5050-60-RGBW



GL-CH2216-280L



GL-SW2216-CTA240

FLEXIBLE LINEAR



GL-SW-NFTS1212



GL-SW-NFS1212



GL-SW-NFT1616



GL-SW-NFS1616



GL-SW-NF3D1616B

BARRISOL

PANEL DOWNLIGHT / PLC



GL-SW120



GL-SW576CTA



GL-SW-162RGB



GL-SW-162RGBW



GL-JL-KMTH600X600



GL-JL-KMTH600X1200



GL-PLC 600*600



GL-PLC 600*1200



GL-PLC 800W



GL-PLC 1100W

POT



GL-XW2325



GL-XW2330



GL-XW2340



GL-XW2360

SPOT

THIN

ZOOM RECESSED

DOWNLIGHT



GL-XW1306



GL-XW1395T



GL-XJE23055A



GL-XJE23075A



GL-SKC033103



GL-XW-DZSD37



GL-XW-DZSD37N



GL-WD35-ZPDB-A107



GL-WX35



GL-WX75-MNDB2810



GL-ST8376-P75P



GL-ST1275



GL-ST8486-S75Q

TZ

FIND



GL-TZ-L55Y-1



GL-TZ-L75Y-1



GL-TZ-L95Y-1



GL-XW4101



GL-XW4102



GL-WB4401



GL-WB4402

EYES TRIMLESS



GL-JRST01



GL-JRST02



GL-JRST05



GL-JRST10



GL-JRS01



GL-JRS02



GL-JRS05



GL-JRS10

SIMPLE



GL-XW2420



GL-XW2425



GL-XW2530



GL-XW2540



GL-XW2355T-D



GL-XW2375T-D



GL-XW2820



GL-XW2825



GL-XW2830

TRACK SPOTLIGHT



GL-XW3207T



GL-BB-DF-G60-LNDB



GL-S-L670



GL-S-L1190

JW MAGNET 48V SYSTEM



GL-JW2521



GL-JWR035T



GL-JWR045T



GL-JWR055T



GL-JWR065T



GL-JWTJ40T



GL-JWTJ50T



GL-JWTJ62T



GL-JWJ-20-6



GL-JWJ-20-12



GL-JWJ-20-18



GL-JWJ-20-24



GL-JWT-20-6A



GL-JWT-20-12A



GL-JWT-20-18A



GL-JWJT-12



GL-JWJT-22



GL-JWJT-32



GL-JWL-20-300



GL-JWL-20-600



GL-JWL-20-900

LU MAGNETIC



GL-LTA165



GL-LTB140



GL-LTC120-6



GL-LUB7517-P-2W



GL-LUB7520-P-1W




GL-LUB7523-P-3W



GL-LUB7527-P-3W



GL-LUB7517-P-2W



GL-LUB7520-P-1W



GL-LUB7523-P-3W



GL-LUB7527-P-3W

LU SURFACE

SKYLINE2.0



GL-SKYLINE

OUT DOOR



GL-SXH025WP



GL-SXH025WL



GL-ZD2527


COLOR TEMPERATURE CONSISTENCY 色溫一致性

Greatlighting knows well the requirement for color temperature consistency for the quality lighting and also faces the phenomenon of inconsistency in terms of color temperature in market. It is a headache of designers and the consumers.

For this purpose, Greatlighting applied the LED chips at high consistency (SDCM≤3) from the quality chips manufacturers.All LED chips are sorted out,stored and pccessed in strict and scientific criterion to guarantee the led chips are consistent in the same batch.

大燁照明深知優質照明對色溫一致性的要求，也面臨市場上色溫不一致的現象，是設計師和消費者頭痛的問題。

為此，大燁照明採用了高一致性的LED晶片 (SDCM≤3) 來自優質晶片製造商。所有LED晶片均按照嚴格科學的標準進行分類、儲存和加工，以確保LED晶片在同一批次中的一致性。

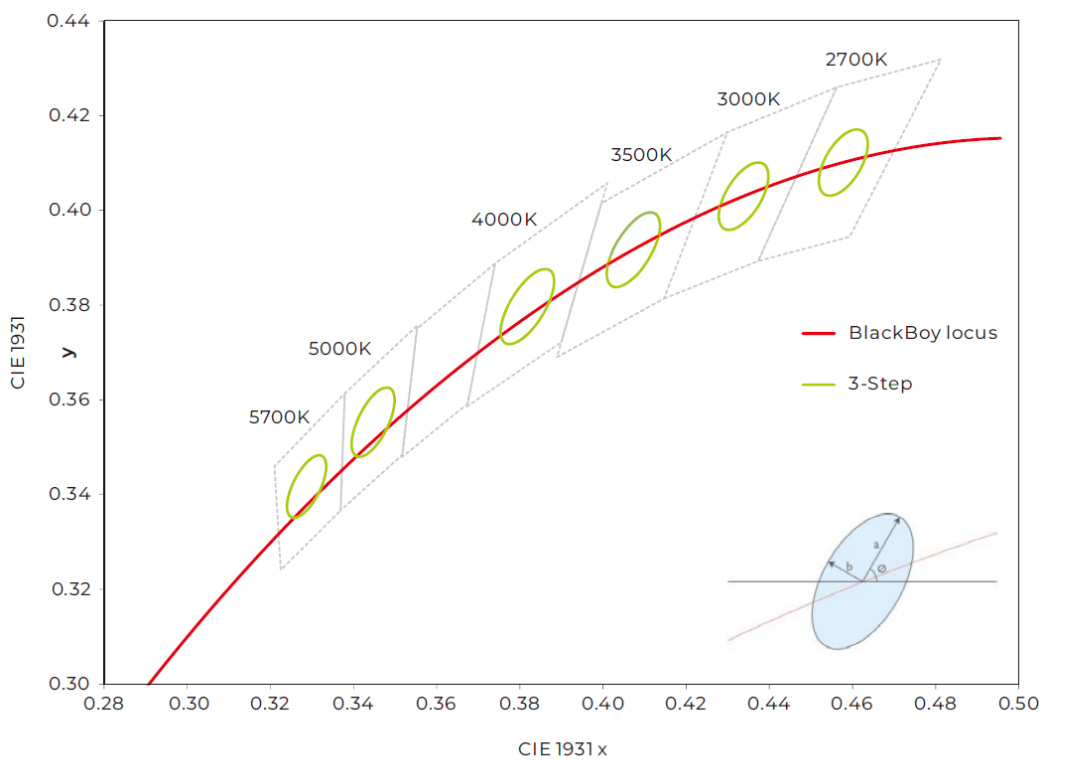

HIGH CRI(HIGH COLOR SATURATION) 高CRI(高色彩飽和度)

The color rendering index of sunlight is defined as 100, and the color rendering index of incandescent lamps is very close to sunlight, so it is regarded as an ideal reference light source.

Greatlighting series adopt world top class LED chip. High color rendering with Ra > 90 makes the subject natural and fresh while few LED products can do so at present. Lighting in high power & high CRI makes the subject outstand in color and material feature, and thus perfectly reflecting the colors of the subject and of human beings. It is an idea lighting solution for the boutiques and important social activities places etc.

太陽光的顯色指數定義為100，白熾燈的顯色指數非常接近日光，因此被視為理想的基準光源。

大燁照明採用世界頂級LED晶片。Ra > 90的高顯色性接近自然光底下的色彩飽和，目前很少有LED產品可以做到這一點。高功率高顯色指數的照明使被攝體在色彩和材質特性上突出，從而完美地反映被攝體的顏色和人體。它是精品店和餐飲社交活動場所等的理想照明解決方案。


High color rendering index 顯色評價指數

The graph below shows the color rendering evaluation numbers of the reference light and "Quality plus Q+". The average color rendering evaluation number is Ra96, red R9-95, and flesh color R15-97, with color reproduction performance close to sunlight. 下图表示基準光和 "Quality plus Q+" 的演色评价数。平均演色评价数为Ra96，红色R9-95，肉色R15-97，具有接近太阳光的颜色再现性能。

	Ra Average	R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
Q+	96	98	98	96	94	98	96	95	96	95	97	93	93	97	97	97
中演色	83	82	92	95	80	82	91	82	57	4	82	78	69	84	98	73
昼白色螢光燈	79	89	89	54	82	81	72	86	76	16	40	63	55	92	70	92

※ Ra is the average value of the values from R1 to R8, and is a representative value of the color rendering evaluation index. Ra是R1~R8為止的數值的平均值，是顯色評價指數的代表性的值

※ The special color evaluation index R9 (red) and R15 (Asian skin color) are important wavelengths for looking beautiful. 特殊顏色評價指數R9(紅色)和R15(亞洲人的膚色)，是看起來漂亮的重要波長。

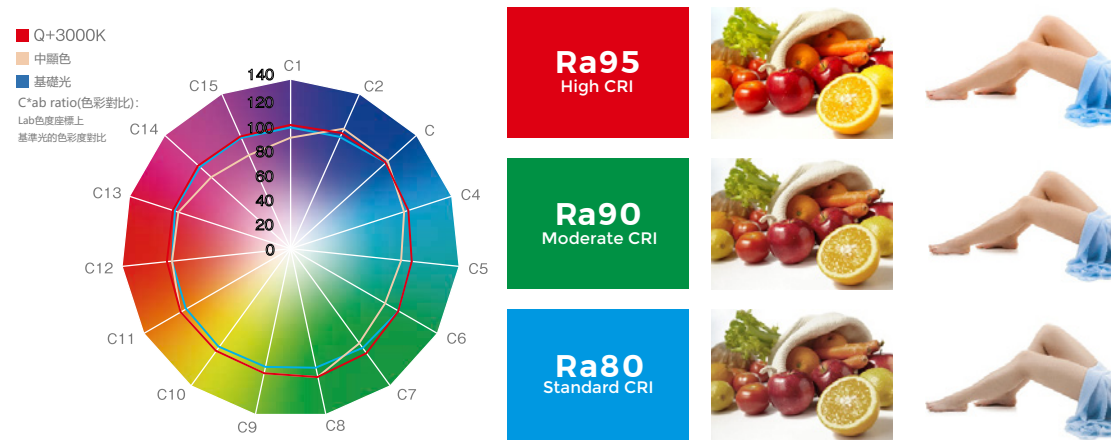

※ The upper left graph shows the comparison of the color saturation between the reference light and the "Quality plus Q+" wavelengths. It has chromaticity performance that exceeds the reference light in all wavelength regions. 左上圖表示基準光和「Quality plus Q+」的各波長的色飽和度比較。在所有的波長區域都具有超過基準光的色度表現性能。


TRU COLOUR 全光譜

The Tru Colour spectrum surpasses industry metrics for light quality, giving our LEDs the highest CRI rating in the industry - with a score of up to 99 on CRI levels. However, we have found that CRI is an outdated value. That's why we place more value in our industry leading TM-30 rating of 99.

Tru Colour LEDs incorporate over 1 billion colours within its wavelengths. This provides the optimal lighting balance for your space, an overall sense of wellbeing, and enhances the appearance of interiors making wood, food, and skin tones appear more natural and lifelike. Make any place magical with Tru Colour illumination

TM-30-15 measures against 99 color samples, all used to provide Fidelity (Rf), Gamut (Rg) and Color Vector Graphics.


TM-30-15 針對 99 個顏色樣本進行測量，兩者皆用於提供保真度 (Rf)、色域 (Rg) 和彩色向量圖。

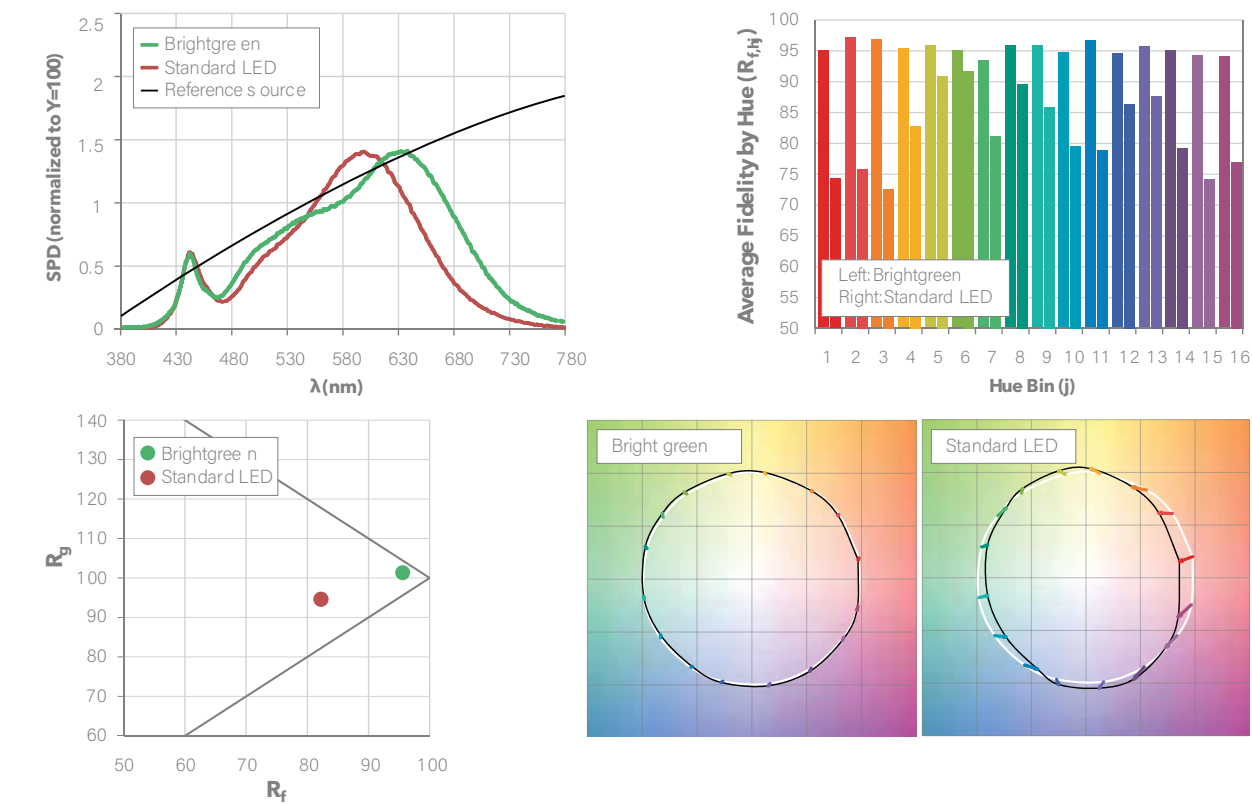

The Difference

We take greater pride in the measurements we achieve on the TM-30 scale. Nevertheless, Tru Colour is the industry leader in both lighting metrics.

我們為我們在 TM-30 規模上所取得的測量結果感到更加自豪。然而，Tru Color 在這兩個照明指標方面都是行業領導者。

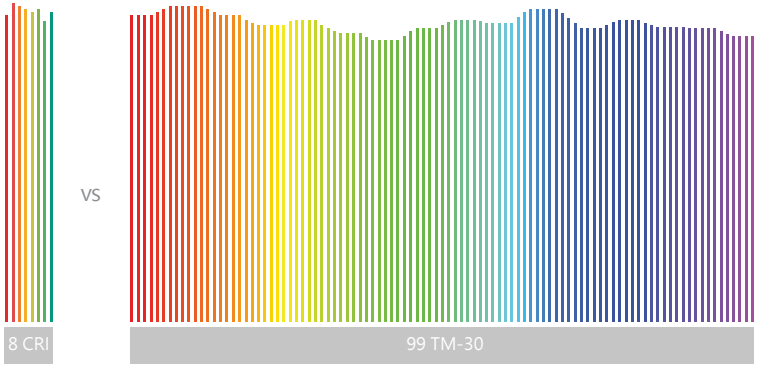

BRAND NEW MODULAR SYSTEM 全新模組化系統



ADOPT NEW DEVELOPED HIGH POWER HIGH EFFICIENCY LED(COB) CHIPS AND LED MODULES CHIPS , WHICH IMPROVES LED LIMINANCE AND EFFICIENCY
採用全新開發的高功率高效率LED(COB)晶片及LED模組晶片，提升LED的亮度與效率

USE LOWEST ENERGY CONSUMPTION TO ACHIEVE MAXIMUM LUMINANCE OUTPUT , SO THAT IMPROVETHE OVERALL EFFICIENCY OF LUMINAIRES BY COMBINATION OF PATENT DESIGN OPTICAL LENS AND REFLECTORS
以最低的能耗達到最大的亮度輸出，透過專利設計的光學透鏡和反射器的組合提高燈具的整體效率。

INNOVATIVE SUPER COMFORTABLE LIGHT DISTRIBUTION TECHNOLOGY COMBINED WITH DIRECTIONAL CALCULUS OPTICAL DESIGN, WITH A SHADING ANGLE UP TO 41° STRUCTURE LAYOUT, TO ACHIEVE UGR<10;
創新的超舒適配光技術結合定向微積分光學設計，遮光角高達41°的結構佈局，實現UGR<10；

WITH BEZEL-FREE AND NARROW FRAME COMPONENTS, A VARIETY OF FACE RING ACCESSORIES TO MEET DIFFERENT DECORATION STYLES.
擁有無邊框與窄邊框組件選擇，多種面環配件搭配，滿足不同的裝潢風格。


擁有無邊框與窄邊框組件選擇，多種面環配件搭配，滿足不同的裝潢風格。




OPTICAL PROCESSING 光學處理

WITH AN EMPHASIS ON VISUAL QUALITY, OUR OPTICS ENSURE SMOOTH, EVEN BEAM DISTRIBUTIONS WITH EXCEPTIONAL OPTICAL CONTROL
強調視覺質量，我們的光學元件透過卓越的光學控制確保平滑、均勻的光束分佈

- SOFT, SMOOTH EDGE
- NO STRIATIONS
- EVEN COLOUR
- 柔軟光滑的邊緣
- 無條紋
- 顏色均勻

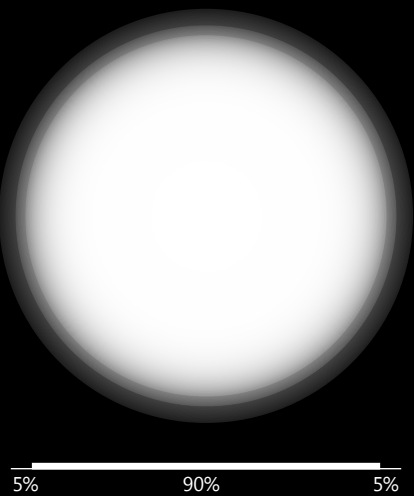


Luminosity intensity

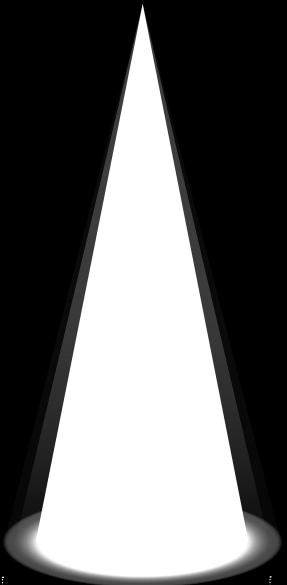

Beam angle

Field angle

ASYMMETRIC WALLWASH

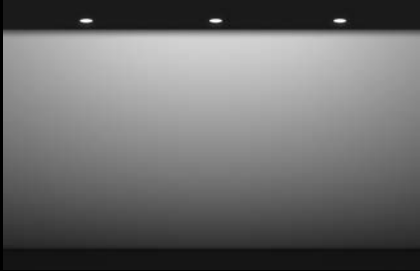

ADJUSTABLE MODEL



NARROW SPOT 8°




NARROW 24°



MEDIUM 38°





WIDE 60°

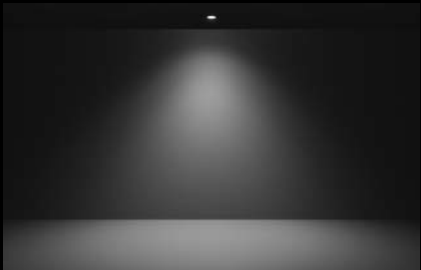



INEAR
SERIES

GL-BW0709LED線型燈



功率 Watts	5W / 9.6W / 10W (Meter)
色溫 Color temperature	3000K / 4000K / 2700K-6000K
光效 Light efficiency	65lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	AI□ WH□

Available

ON/OFF

TRIAC

0-10V

DALI

PLC

 Dimmable

 Tunable white

CE


CB





IP 20

GL-BW1010LED線型燈



功率 Watts	5W / 9.6W / 10W (Meter)
色溫 Color temperature	3000K / 4000K / 2700K-6000K
光效 Light efficiency	65lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	AI□ WH□

Available

ON/OFF

TRIAC

0-10V

DALI

PLC

 Dimmable

 Tunable white

CE



CB





IP 20

GL-BW1010BLED線型燈



功率 Watts	5W / 9.6W / 10W (Meter)
色溫 Color temperature	3000K / 4000K / 2700K-6000K
光效 Light efficiency	65lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	AI□ WH□

Available

ON/OFF

TRIAC

0-10V

DALI

PLC

 Dimmable

 Tunable white

CE



CB





IP 20

GL-BW1010BBLED線型燈



功率 Watts	5W / 9.6W / 10W / 11.52W / 14.4W (Meter)
色溫 Color temperature	3000K / 4000K / 2700K-6000K
光效 Light efficiency	65lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	AI□ WH□

Available

ON/OFF

TRIAC

0-10V

DALI

PLC

 Dimmable

 Tunable white

CE



CB





IP 20

GL-BW1613LED線型燈



功率 Watts	5W / 9.6W / 10W / 11.52W / 14.4W (Meter)
色溫 Color temperature	3000K / 4000K / 2700K-6000K
光效 Light efficiency	65lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	AI□ WH□

Available

ON/OFF

TRIAC

0-10V

DALI

PLC

 Dimmable

 Tunable white

CE


CB





IP 20

GL-BW2613LED線型燈



功率 Watts	5W / 9.6W / 10W / 11.52W / 14.4W (Meter)
色溫 Color temperature	3000K / 4000K / 2700K-6000K
光效 Light efficiency	65lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	AI□ WH□

Available

ON/OFF

TRIAC

0-10V

DALI

PLC

 Dimmable

 Tunable white

CE



CB





IP 20

GL-CH1911KLED線型燈



功率 Watts	14.4W / 19.2W / 20.16W / 22W (Meter)
色溫 Color temperature	3000K / 4000K / 2700K-6000K / RGB(W)
光效 Light efficiency	65lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	AI□ WH□

Available

ON/OFF

TRIAC

0-10V

DALI

PLC

 Dimmable

 Tunable white

 RGBW

CE



CB





IP 20

GL-BW2020BLED線型燈



功率 Watts	14.4W / 19.2W / 20.16W / 22W (Meter)
色溫 Color temperature	3000K / 4000K / 2700K-6000K / RGB(W)
光效 Light efficiency	65lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	AI□ WH□

Available

ON/OFF

TRIAC

0-10V

DALI

 Dimmable

 Tunable white

 RGBW

CE




CB





IP 20




GL-BW1616C LED線型燈



功率 Watts	5W / 9.6W / 10W / 11.52W / 14.4W (Meter)
色溫 Color temperature	3000K / 4000K / 2700K-6000K
光效 Light efficiency	65lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	AI ☐ WH ☐
Available	☐ Dimmable ☐ Tunable white
ON/OFF	
TRIAC	
0-10V	
DALI	
PLC	





GL-CH3030C LED線型燈



功率 Watts	14.4W / 19.2W / 20.16W / 22W (Meter)
色溫 Color temperature	3000K / 4000K / 2700K-6000K / RGB(W)
光效 Light efficiency	70lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	AI ☐ WH ☐
Available	☐ Dimmable ☐ Tunable white ☐ RGBW
ON/OFF	
TRIAC	
0-10V	
DALI	
PLC	





GL-H03030K LED線型燈



功率 Watts	14.4W / 19.2W / 20.16W / 22W / 33.3W (Meter)
色溫 Color temperature	3000K / 4000K / 2700K-6000K / RGB(W)
光效 Light efficiency	65lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	AI ☐ WH ☐
Available	☐ Dimmable ☐ Tunable white ☐ RGBW
ON/OFF	
TRIAC	
0-10V	
DALI	
PLC	





GL-BW3535 LED線型燈



功率 Watts	14.4W / 19.2W / 20.16W / 22W / 33.3W (Meter)
色溫 Color temperature	3000K / 4000K / 2700K-6000K / RGB(W)
光效 Light efficiency	70lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	AI ☐ WH ☐
Available	☐ Dimmable ☐ Tunable white ☐ RGBW
ON/OFF	
TRIAC	
0-10V	
DALI	
PLC	





GL-BW4043 LED線型燈



功率 Watts	14.4W / 19.2W / 20.16W / 22W / 33.3W (Meter)
色溫 Color temperature	3000K / 4000K / 2700K-6000K / RGB(W)
光效 Light efficiency	70lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	AI ☐ WH ☐
Available	☐ Dimmable ☐ Tunable white ☐ RGBW
ON/OFF	
TRIAC	
0-10V	
DALI	
PLC	





GL-BW5035 LED線型燈



功率 Watts	14.4W / 19.2W / 20.16W / 22W / 33.3W (Meter)
色溫 Color temperature	3000K / 4000K / 2700K-6000K / RGB(W)
光效 Light efficiency	70lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	AI ☐ WH ☐
Available	☐ Dimmable ☐ Tunable white ☐ RGBW
ON/OFF	
TRIAC	
0-10V	
DALI	
PLC	



GL-BW5050 LED線型燈




功率 Watts	14.4W / 19.2W / 20.16W / 22W / 33.3W (Meter)
色溫 Color temperature	3000K / 4000K / 2700K-6000K / RGB(W)
光效 Light efficiency	70lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	AI ☐ WH ☐
Available	☐ Dimmable ☐ Tunable white ☐ RGBW
ON/OFF	
TRIAC	
0-10V	
DALI	
PLC	



GL-BW-T30

LED線型燈




功率 Watts	14.4W / 19.2W / 20.16W / 22W (Meter)
色溫 Color temperature	3000K / 4000K / 2700K-6000K / RGB(W)
光效 Light efficiency	65lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	AI ☐ WH ☐
Available	☐ Dimmable ☐ Tunable white ☐ RGBW
ON/OFF	
TRIAC	
0-10V	
DALI	
PLC	



GL-BW-T60

LED線型燈




功率 Watts	14.4W / 19.2W / 20.16W / 22W / 33.3W (Meter)
色溫 Color temperature	3000K / 4000K / 2700K-6000K / RGB(W)
光效 Light efficiency	70lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	AI ☐ WH ☐
Available	☐ Dimmable ☐ Tunable white ☐ RGBW
ON/OFF	
TRIAC	
0-10V	
DALI	
PLC	



GL-BW-T120

LED線型燈




功率 Watts	14.4W / 19.2W / 20.16W / 22W / 33.3W (Meter)
色溫 Color temperature	3000K / 4000K / 2700K-6000K / RGB(W)
光效 Light efficiency	70lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	AI ☐ WH ☐
Available	☐ Dimmable ☐ Tunable white ☐ RGBW
ON/OFF	
TRIAC	
0-10V	
DALI	
PLC	







GL-SW2109

LED線型燈



功率 Watts	5W / 9.6W / 10W (Meter)
色溫 Color temperature	3000K / 4000K / 2700K-6000K
光效 Light efficiency	70lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	AI ☐ WH ☐
Available	☐ Dimmable ☐ Tunable white
ON/OFF	
TRIAC	
0-10V	
DALI	
PLC	

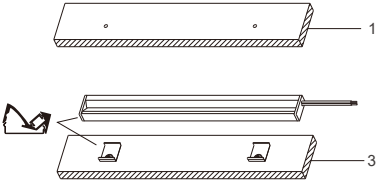



- 1.膨脹螺栓嵌入安裝面。
- 2.通過螺絲固定夾子。
- 3.線型燈安裝在夾子上。
- 4.連接LED線型燈電源。






- 1.The expansion bolt is embedded into the mounting surface.
- 2.Fixing clip through screw.
- 3.The linear Light is installed on the clip.
- 4.Connect LED Linear Light power supply.

GL-SW2409

LED線型燈



功率 Watts	5W / 9.6W / 10W (Meter)
色溫 Color temperature	3000K / 4000K / 2700K-6000K
光效 Light efficiency	70lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	AI ☐ WH ☐
Available	☐ Dimmable ☐ Tunable white
ON/OFF	
TRIAC	
0-10V	
DALI	
PLC	








REFLECTION LINEAR SERIES

The anti-glare polarized light series focusing on the effect of seeing the light in the room but can't seeing the presence of the lamp. When we light up the traditional lights,not only the luminous surface is obvious, but also makes people feel dazzling and dizzy. However, the anti-glare polarized series has a special structure to make the light soft and not dazzling. The polarized light washes the wall and distributes the light evenly, showing the beauty of visual light effect.

防眩偏光系列專注於室內見光不見燈的效果。傳統的燈光在點亮的時候，不僅發光面明顯，還會讓人感到刺眼和產生眩暈感眼，但是防眩偏光系列擁有特殊結構，使燈光柔和和不刺偏光洗牆、佈光均勻，呈現出視覺的光效美。

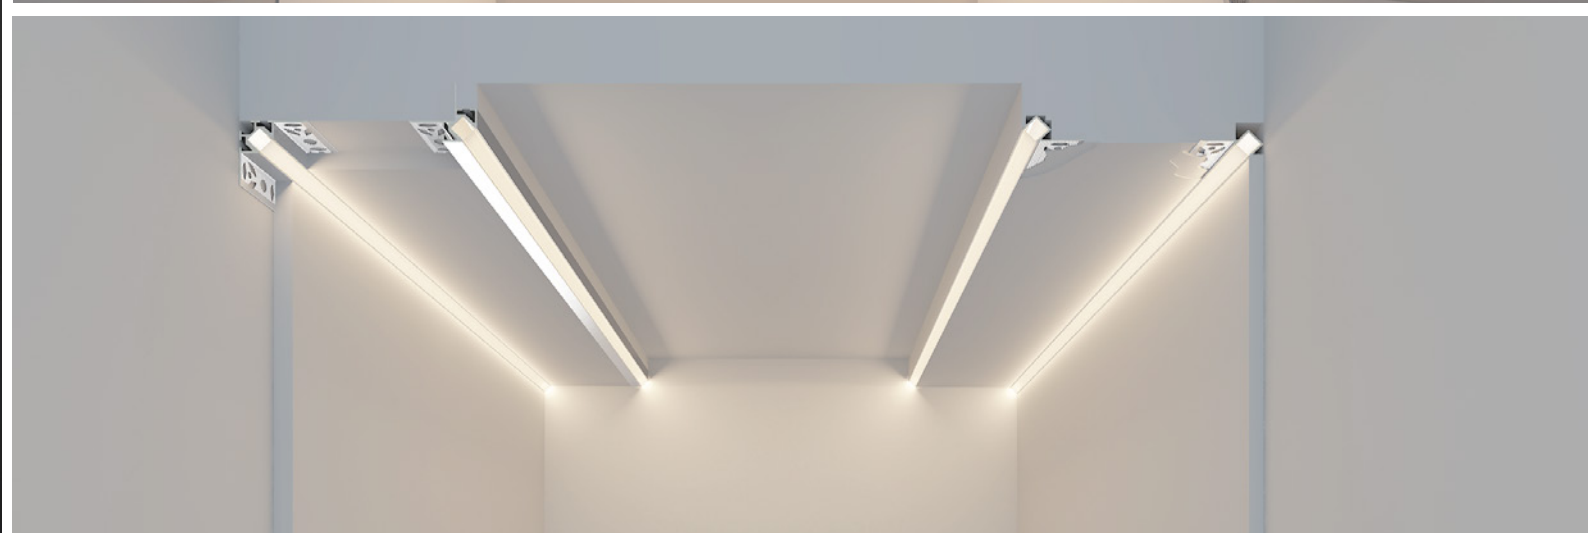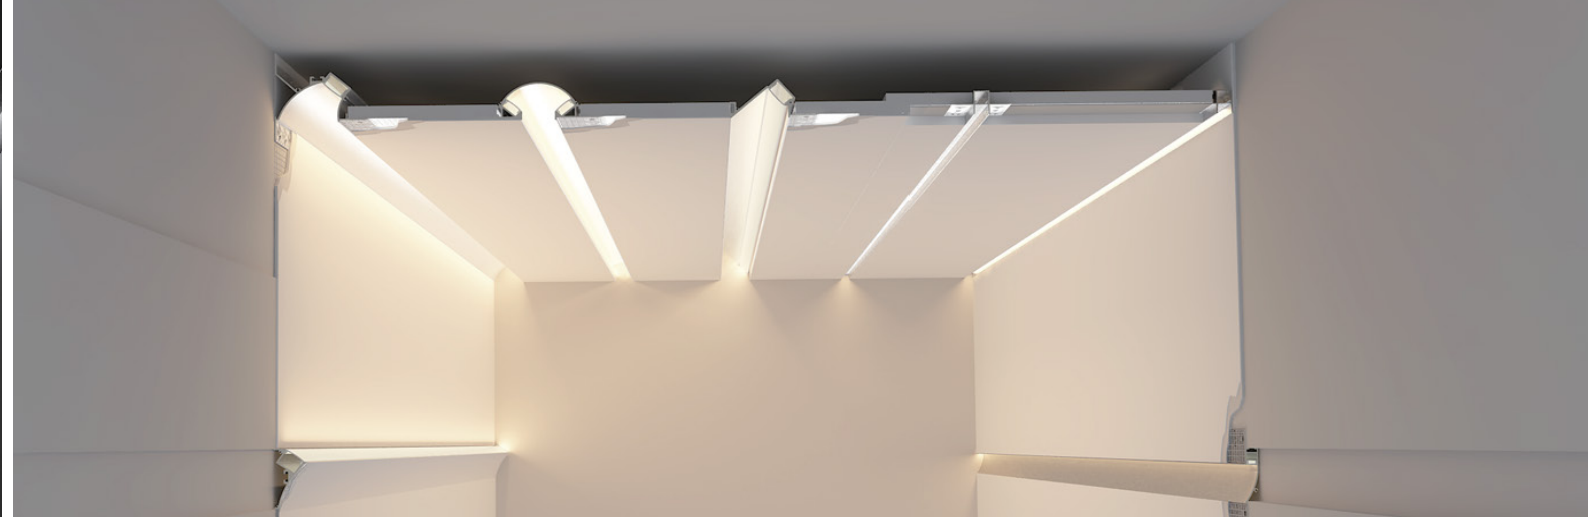


GL-QSG4118LED線型燈

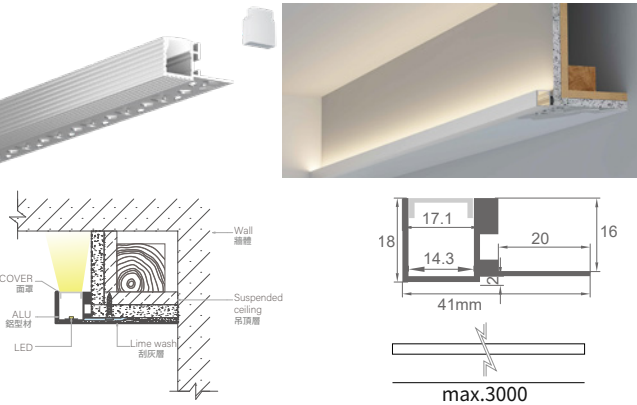


功率 Watts	14.4W / 19.2W / 20.16W / 22W (Meter)
色溫 Color temperature	3000K / 4000K / 2700K-6000K / RGB(W)
光效 Light efficiency	65lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	AI□ WH□
Available	☐ Dimmable ☐ Tunable white ☐ RGBW
ON/OFF	
TRIAC	
0-10V	
DALI	
PLC	

GL-QSG4118BLED線型燈

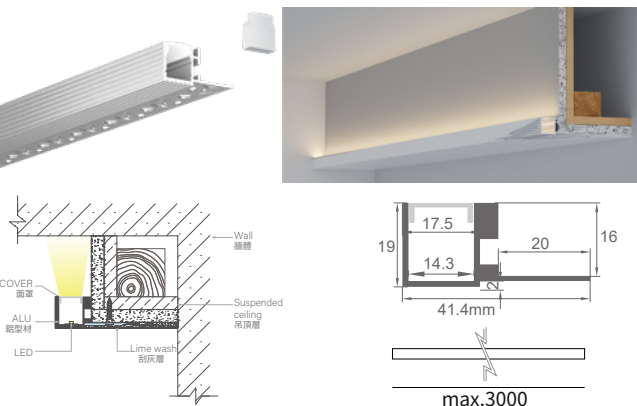


功率 Watts	14.4W / 19.2W / 20.16W / 22W (Meter)
色溫 Color temperature	3000K / 4000K / 2700K-6000K / RGB(W)
光效 Light efficiency	65lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	AI□ WH□
Available	☐ Dimmable ☐ Tunable white ☐ RGBW
ON/OFF	
TRIAC	
0-10V	
DALI	
PLC	

GL-QSG3825LED線型燈

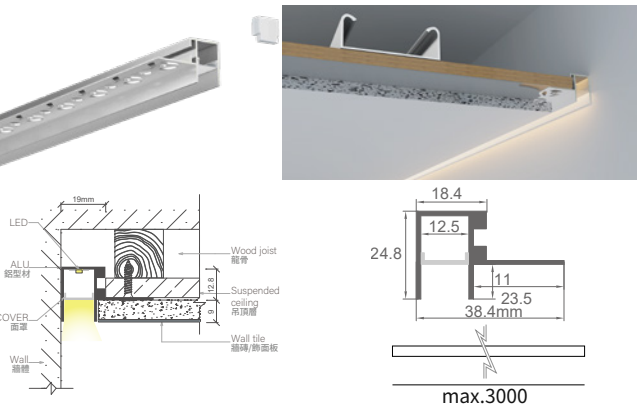


功率 Watts	14.4W / 19.2W / 20.16W / 22W (Meter)
色溫 Color temperature	3000K / 4000K / 2700K-6000K / RGB(W)
光效 Light efficiency	65lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	AI□ WH□
Available	☐ Dimmable ☐ Tunable white ☐ RGBW
ON/OFF	
TRIAC	
0-10V	
DALI	
PLC	

GL-QSG3820LED線型燈

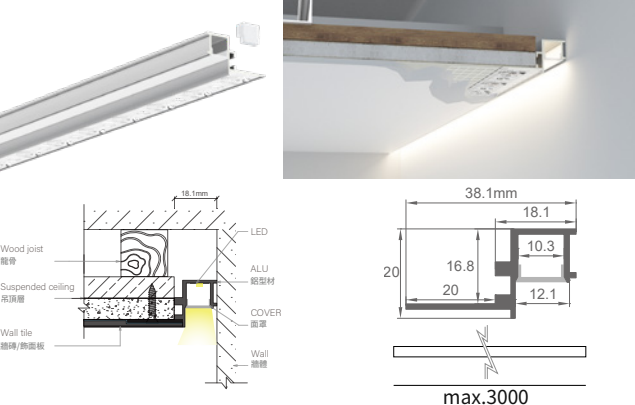


功率 Watts	9.6W / 11.52W / 14.4W (Meter)
色溫 Color temperature	3000K / 4000K / 2700K-6000K
光效 Light efficiency	65lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	AI□ WH□
Available	☐ Dimmable ☐ Tunable white ☐ RGBW
ON/OFF	
TRIAC	
0-10V	
DALI	
PLC	

GL-QSG4320LED線型燈

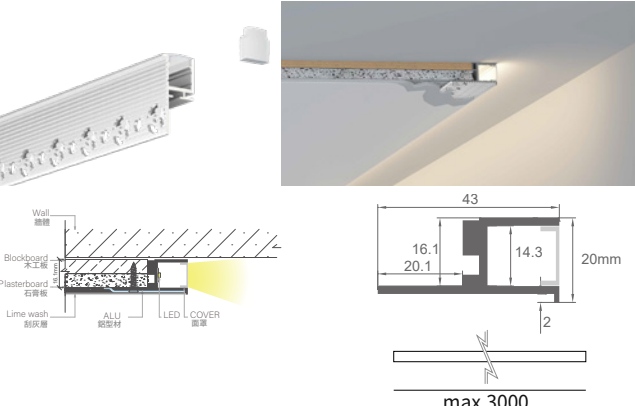


功率 Watts	14.4W / 19.2W / 20.16W / 22W (Meter)
色溫 Color temperature	3000K / 4000K / 2700K-6000K / RGB(W)
光效 Light efficiency	65lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	AI□ WH□
Available	☐ Dimmable ☐ Tunable white ☐ RGBW
ON/OFF	
TRIAC	
0-10V	
DALI	
PLC	

GL-QSG8556LED線型燈

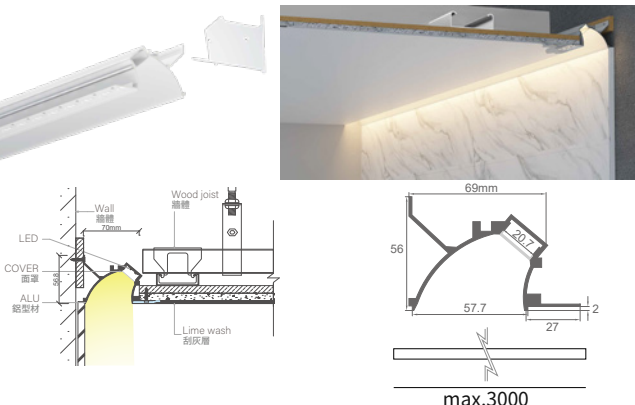


功率 Watts	14.4W / 19.2W / 20.16W / 22W / 33.3W (Meter)
色溫 Color temperature	3000K / 4000K / 2700K-6000K / RGB(W)
光效 Light efficiency	65lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	AI□ WH□
Available	☐ Dimmable ☐ Tunable white ☐ RGBW
ON/OFF	
TRIAC	
0-10V	
DALI	
PLC	

GL-QSG8556B LED線型燈

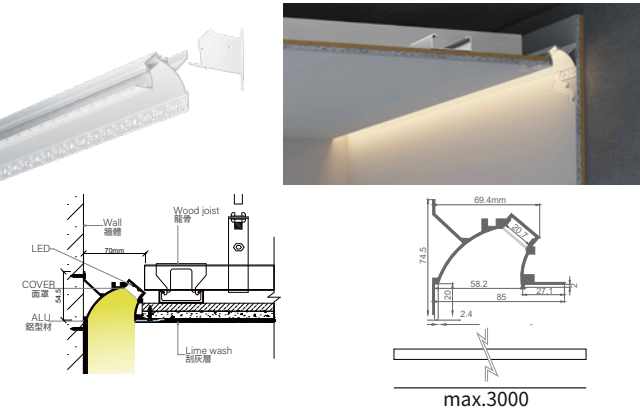


功率 Watts	14.4W / 19.2W / 20.16W / 22W / 33.3W (Meter)
色溫 Color temperature	3000K / 4000K / 2700K-6000K / RGB(W)
光效 Light efficiency	65lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	AI ☐ WH ☐
Available	☐ Dimmable ☐ Tunable white ☐ RGBW
ON/OFF	
TRIAC	
0-10V	
DALI	
PLC	

GL-QSG2655 LED線型燈

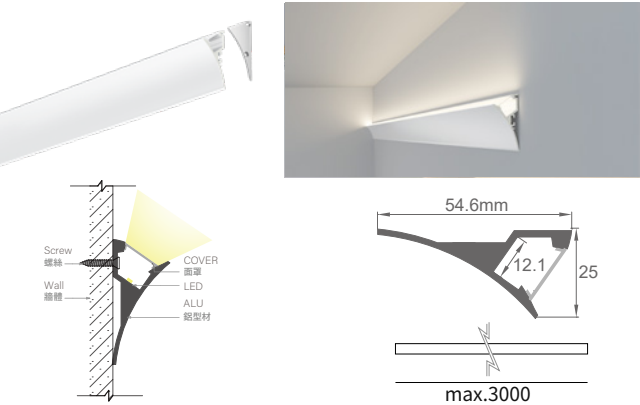


功率 Watts	14.4W / 19.2W / 20.16W / 22W (Meter)
色溫 Color temperature	3000K / 4000K / 2700K-6000K / RGB(W)
光效 Light efficiency	65lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	AI ☐ WH ☐
Available	☐ Dimmable ☐ Tunable white ☐ RGBW
ON/OFF	
TRIAC	
0-10V	
DALI	
PLC	

GL-QSG2696 LED線型燈

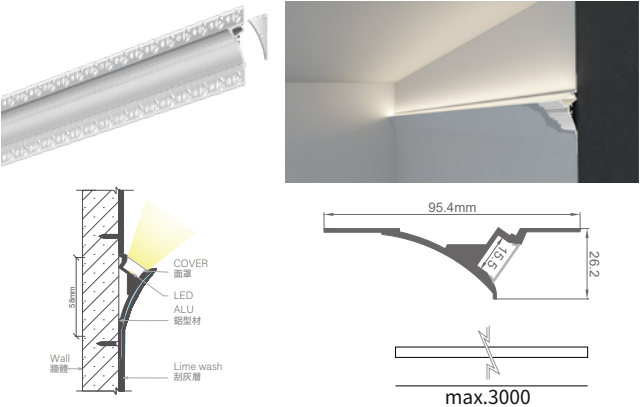


功率 Watts	14.4W / 19.2W / 20.16W / 22W (Meter)
色溫 Color temperature	3000K / 4000K / 2700K-6000K / RGB(W)
光效 Light efficiency	65lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	AI ☐ WH ☐
Available	☐ Dimmable ☐ Tunable white ☐ RGBW
ON/OFF	
TRIAC	
0-10V	
DALI	
PLC	

GL-QSG10037 LED線型燈

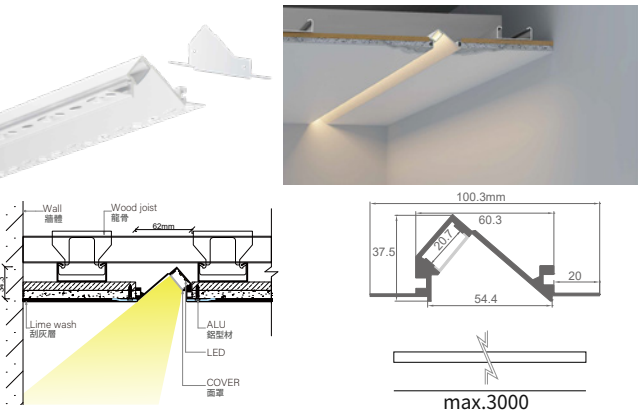


功率 Watts	14.4W / 19.2W / 20.16W / 22W (Meter)
色溫 Color temperature	3000K / 4000K / 2700K-6000K / RGB(W)
光效 Light efficiency	65lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	AI ☐ WH ☐
Available	☐ Dimmable ☐ Tunable white ☐ RGBW
ON/OFF	
TRIAC	
0-10V	
DALI	
PLC	

GL-QSG11637 LED線型燈

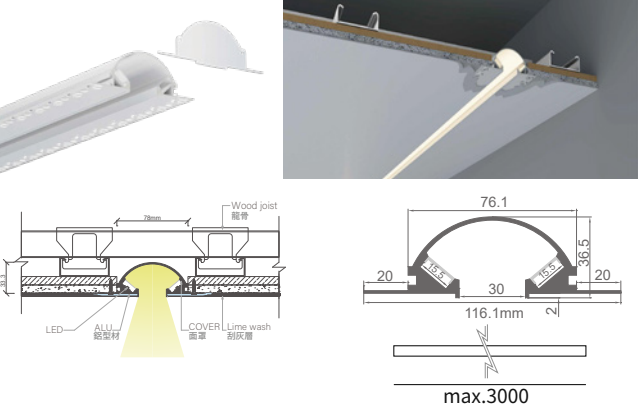


功率 Watts	14.4W*2 / 19.2W*2 / 20.16W*2 / 22W*2 (Meter)
色溫 Color temperature	3000K / 4000K / 2700K-6000 / RGB(W)K
光效 Light efficiency	65lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	AI ☐ WH ☐
Available	☐ Dimmable ☐ Tunable white ☐ RGBW
ON/OFF	
TRIAC	
0-10V	
DALI	
PLC	

GL-QSG3596 LED線型燈

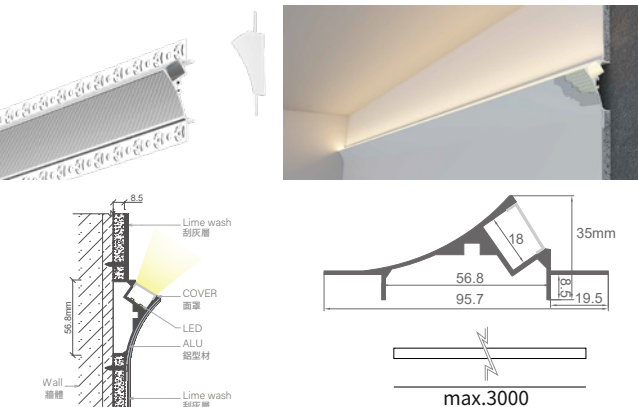


功率 Watts	14.4W / 19.2W / 20.16W / 22W (Meter)
色溫 Color temperature	3000K / 4000K / 2700K-6000K / RGB(W)
光效 Light efficiency	65lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	AI ☐ WH ☐
Available	☐ Dimmable ☐ Tunable white ☐ RGBW
ON/OFF	
TRIAC	
0-10V	
DALI	
PLC	

GL-QSG3212B LED線型燈

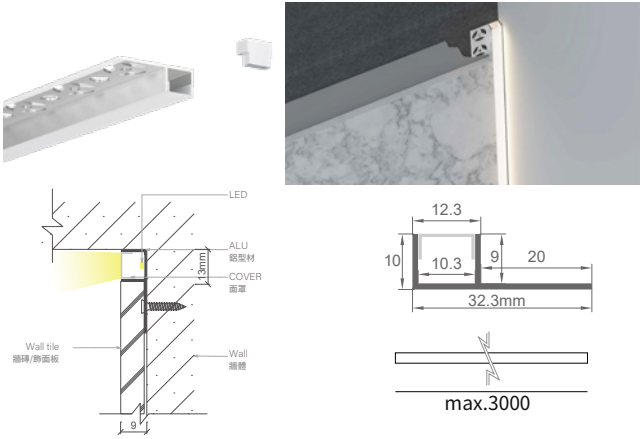


功率 Watts	5W / 9.6W / 10W / 11.52W / 14.4W (Meter)
色溫 Color temperature	3000K / 4000K / 2700K-6000K
光效 Light efficiency	65lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	AI ☐ WH ☐
Available	☐ Dimmable ☐ Tunable white
ON/OFF	TRIAC
0-10V	DALI
PLC	

GL-QSG9214 LED線型燈

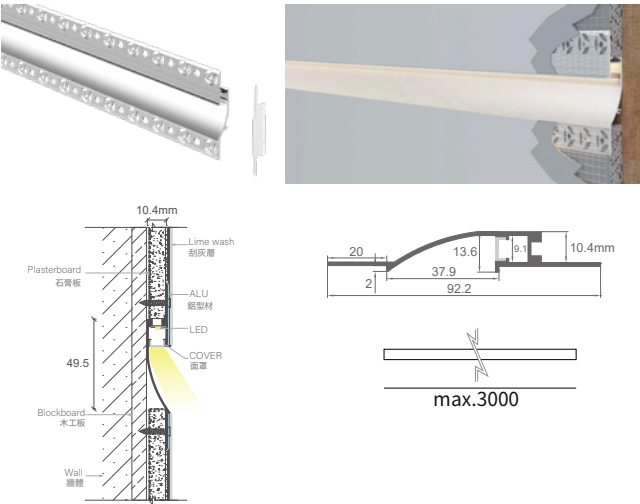


功率 Watts	5W / 9.6W / 10W / 11.52W / 14.4W (Meter)
色溫 Color temperature	3000K / 4000K / 2700K-6000K
光效 Light efficiency	65lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DV12V
顏色 Color	AI ☐ WH ☐
Available	☐ Dimmable ☐ Tunable white
ON/OFF	TRIAC
0-10V	DALI
PLC	

GL-QSG12055-2525C LED線型燈

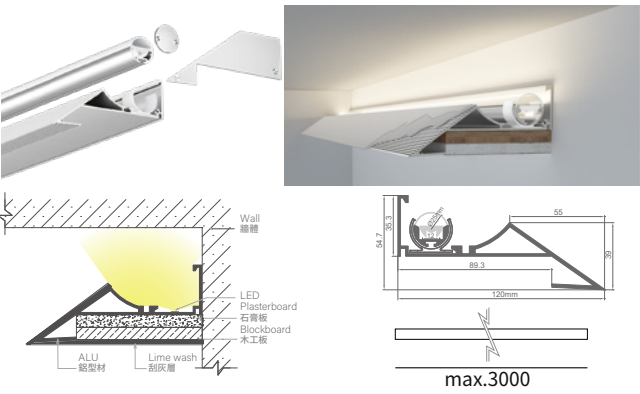

功率 Watts	14.4W / 19.2W / 20.16W / 22W (Meter)
色溫 Color temperature	3000K / 4000K / 2700K-6000K / RGB(W)
光效 Light efficiency	65lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	AI ☐ WH ☐
Available	☐ Dimmable ☐ Tunable white ☐ RGBW
ON/OFF	TRIAC
0-10V	DALI
PLC	


GL-QSG7058 LED線型燈

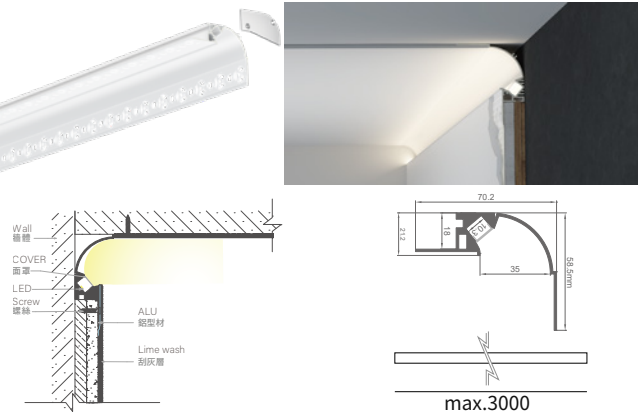

功率 Watts	5W / 9.6W / 10W / 11.52W / 14.4W (Meter)
色溫 Color temperature	3000K / 4000K / 2700K-6000K
光效 Light efficiency	65lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	AI ☐ WH ☐
Available	☐ Dimmable ☐ Tunable white
ON/OFF	TRIAC
0-10V	DALI
PLC	



HIGH VOLTAGE

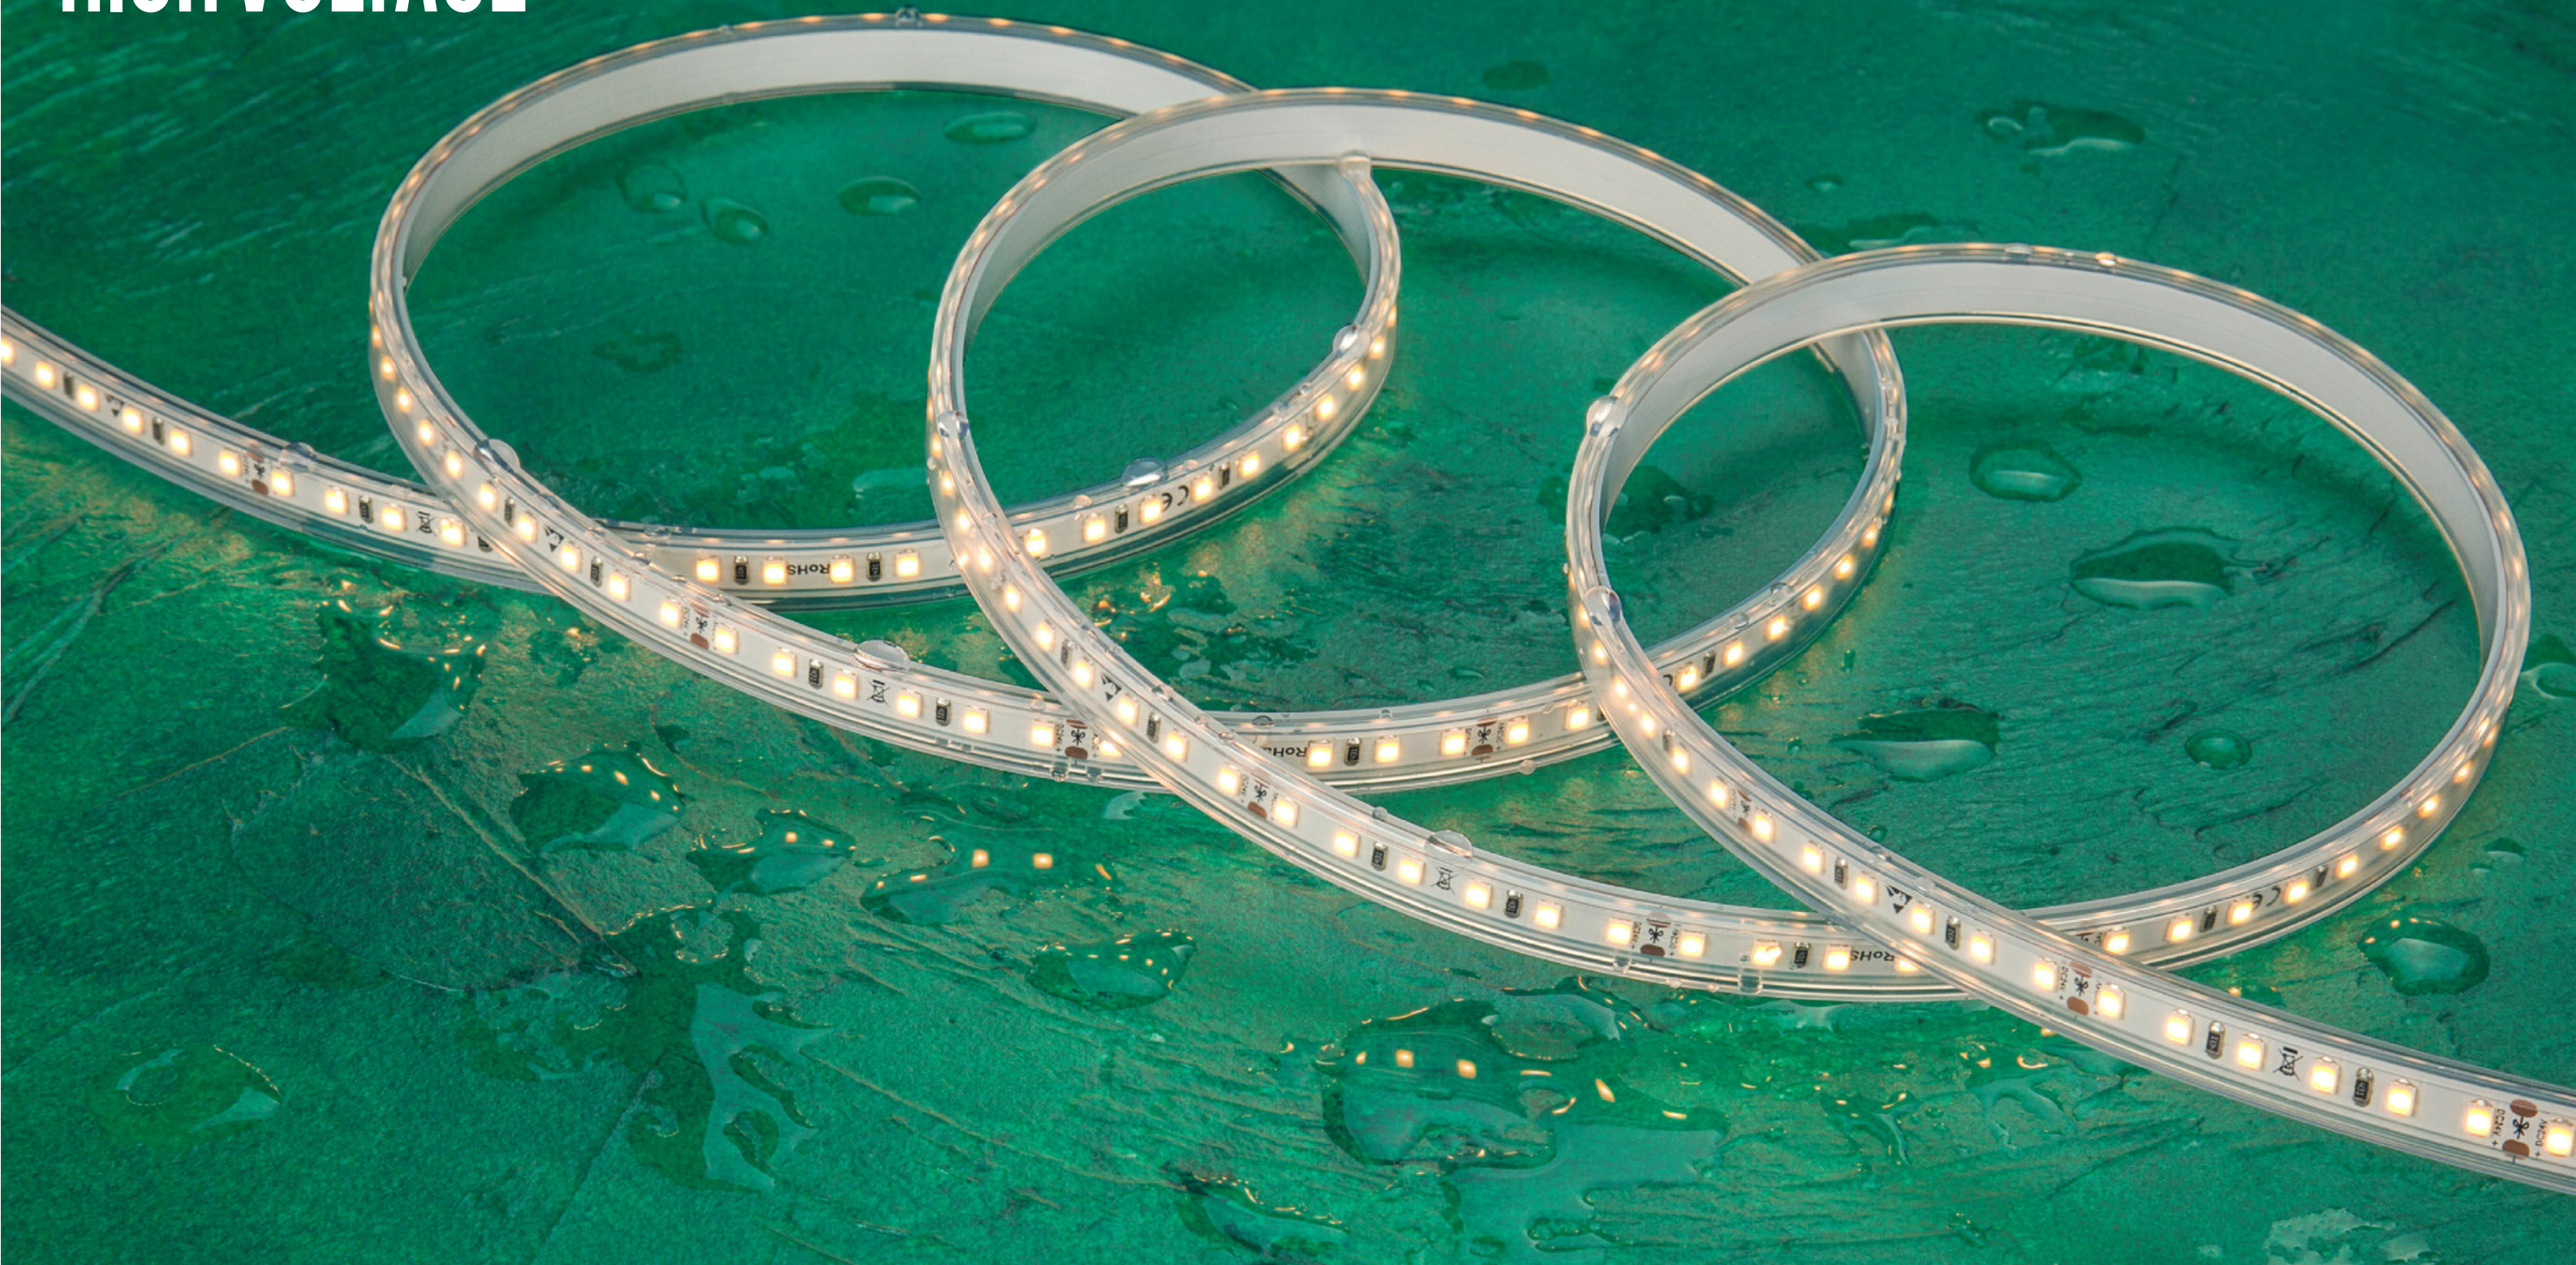


ADVANTAGE





IC 高品質高壓線性IC，恆定LED工作電流

(over temperature protection)consistent current from the head to the tail (過溫保護) 頭尾電流一致

High luminous quality,same brightness from the head to the tail.
高效流明質量，首尾亮度一致

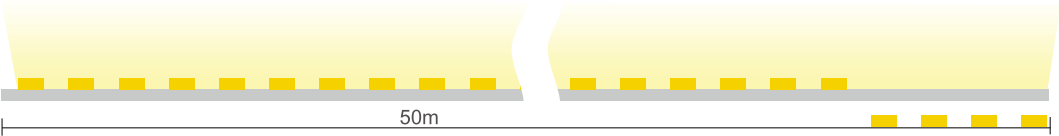

Extrusion hollow molding technology , inside arc and outside square structure, strong pressure resistance.
擠壓中空成型技術，內圓弧外方結構，抗壓能力強
UV resistance, uniform light emission, high temperture resistance , yellowing resistance , good heat dissipation,flame retardant and good flexibility
抗紫外線、發光均勻、耐高溫、耐黃變、散熱性好、阻燃、柔韌性好



VDE rubber cablew with safety cartificate , double insulation much safer, integrated waterproof design.
VDE 橡膠電纜帶安全盒，雙重絕緣更安全，一體化防水設計




GL-SW-COB-110V(IP65)

LED高壓燈帶



功率 Watts	12W (Meter)
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	93.2lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥80
電壓 Voltage	AC 110V
顏色 Color	N/A
Available ON/OFF	IP65
CE CB   IP 65	

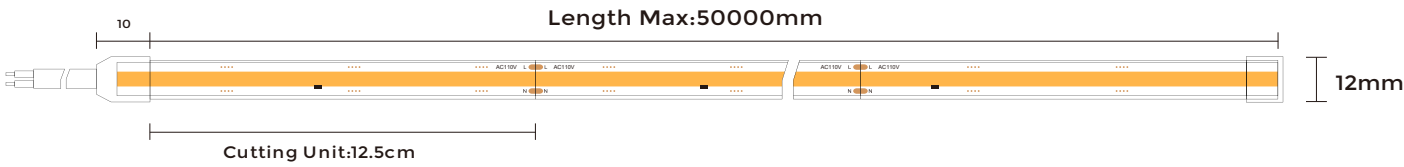


GL-SW-COB-220V(IP65)

LED高壓燈帶



功率 Watts	12W (Meter)
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	93.2lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥80
電壓 Voltage	AC 220V
顏色 Color	N/A
Available ON/OFF	IP65
CE CB   IP 65	

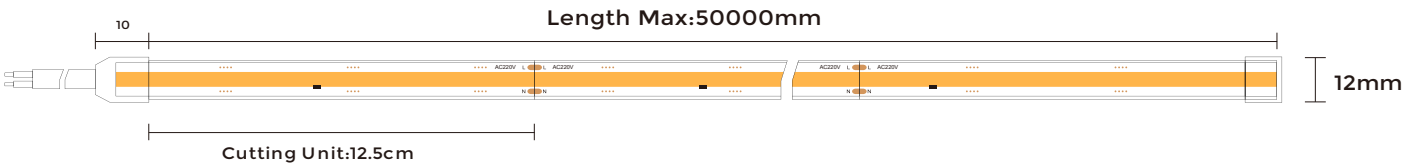


GL-SW-2835W60-110V(IP67)

LED擠出型高壓燈帶



功率 Watts	10W (Meter)
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	93.2lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	AC 110V
顏色 Color	N/A
Available ON/OFF	IP67
CE CB   IP 67	

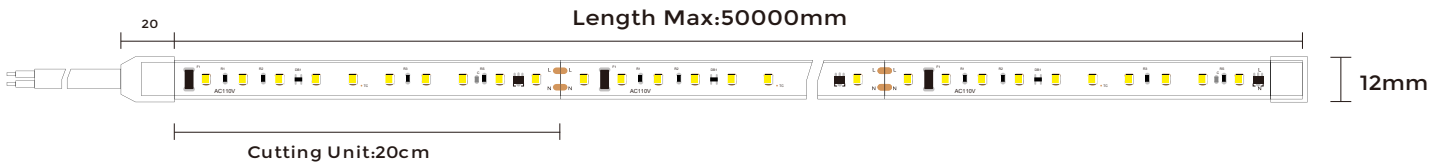


GL-SW-2835W60-230V(IP67)

LED高壓燈帶



功率 Watts	10W (Meter)
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	93.2lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	AC 220V
顏色 Color	N/A
Available ON/OFF	IP67
CE CB   IP 67	

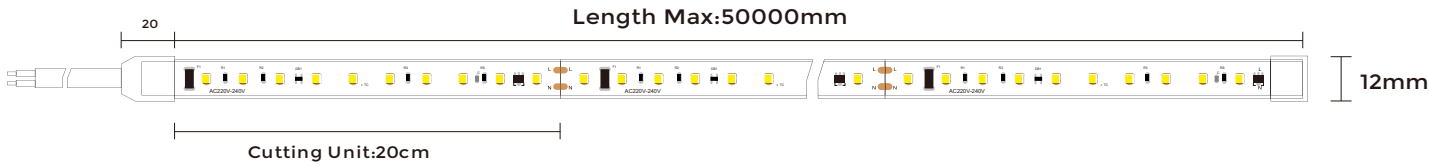

LEDSTRIPS

The adoption of American CREE chip, which already passed relevant certification department test and reached the international standards. Adopting automatic assembly line and high standard production process to complete assembly. Providing different powers, color temperature to meet customer needs. IP20, IP65 protection range is available. Passed CE, ROHS, CCC and other certifications. 採用美國CREE芯片，已通過相關認證部門測試，達到國際標準。採用自動化流水線和高標準生產工藝完成組裝。提供不同功率、色溫以滿足客戶需求。可選擇IP20、IP65的防水防塵範圍。通過了CE、ROHS、CCC等認證。



WIRE

Available to customize the wire with one end or dual ends



PRINT

Available to customize the content and print on the FPC



LENGTH

Available to customize the length within the maximun supporting range



COLOR

Available to customize the color



IP

Available to customize the IP Rating




CRI

Available to customize the CRI range




GL-2835-125L-5MM LED裸板一燈一剪燈帶




功率 Watts	5W / 9.6W (Meter)
色溫 Color temperature	2700K / 3000K / 3500K / 4000K / 5000K
光效 Light efficiency	90lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	N/A
Available	ON/OFF TRIAC 0-10V DALI PLC Dimmable IP20 IP65 CE CB IP20 IP65

GL-SW2835-120L-8MM LED裸板燈帶




功率 Watts	14.4W (Meter)
色溫 Color temperature	2700K / 3000K / 3500K / 4000K / 5000K
光效 Light efficiency	80lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	N/A
Available	ON/OFF TRIAC 0-10V DALI PLC Dimmable IP20 IP65 CE CB IP20 IP65

GL-SW2835-224L-10MM LED裸板燈帶




功率 Watts	20.16W (Meter)
色溫 Color temperature	3000K / 3500K / 4000K / 5000K
光效 Light efficiency	150lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	N/A
Available	ON/OFF TRIAC 0-10V DALI PLC Dimmable IP20 CE CB IP20

GL-SW2835-320L-24MM LED裸板燈帶




功率 Watts	33.3W(Meter)
色溫 Color temperature	2700K / 3000K / 3500K / 4000K / 5000K
光效 Light efficiency	130lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	N/A
Available	ON/OFF TRIAC 0-10V DALI PLC Dimmable IP20 CE CB IP20

GL-2835-60L-8MM LED 3D裸板燈帶



功率 Watts	11.52W (Meter)
色溫 Color temperature	2700K / 3000K / 3500K / 4000K / 5000K
光效 Light efficiency	74.7lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	D24V
顏色 Color	N/A
Available	ON/OFF TRIAC 0-10V DALI PLC Dimmable IP20 CE CB IP20

GL-SW-COB-400-5MM-24V LED COB裸板燈帶





功率 Watts	10W (Meter)
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	60lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	D24V
顏色 Color	N/A
Available	ON/OFF TRIAC 0-10V DALI PLC Dimmable IP20 CE CB IP20



Unconventional specifications, please consult the seller first
非常規規格產品請先與賣家溝通

GL-SW5050-60L-RGB

LED裸板燈帶 (RGB)



功率 Watts	14.4W (Meter)
色溫 Color temperature	RGB
光效 Light efficiency	N/A
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V / DC12V(OPTIONS)
顏色 Color	N/A

Available

ON/OFF

DMX

DALI

PLC

Dimmable

RGB

IP20

IP65

CE


CB

IP20

IP65

GL-SW3838-240L-RGBW

LED裸板燈帶(RGBW)



功率 Watts	19.2W (Meter)
色溫 Color temperature	RGBW (W:3000K/4000K/6000K)(OPTIONS)
光效 Light efficiency	N/A
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	N/A

Available

ON/OFF

DMX

DALI

PLC

Dimmable

RGBW

IP20

IP65

CE


CB

IP20

IP65

GL-CH2216-280L-5MM-24V

LED雙色溫裸板燈帶



功率 Watts	9.6W (Meter)
色溫 Color temperature	2700K-6000K
光效 Light efficiency	N/A
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	N/A

Available

ON/OFF

0-10V

DALI

PLC

Dimmable

Tunable white

IP20

IP65

CE


CB

IP20

IP65

GL-SW2216-CTA240-10MM

LED雙色溫裸板燈帶



功率 Watts	22W (Meter)
色溫 Color temperature	2700K-6000K
光效 Light efficiency	70lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	N/A

Available

ON/OFF

0-10V

DALI

PLC

Dimmable

Tunable white

IP20

IP65

CE

CB

IP20

IP65



Unconventional specifications, please consult the seller first
非常規規格產品請先與賣家溝通



FLEXABLE LINEAR

Silicone neon strips adopt the silicone extrusion molding process. The protection level can reach to IP65, with resistance to salt water. Suitable for indoor and outdoor modelling decoration, building outline, city night lighting, etc.
硅膠霓虹燈條採用硅膠擠出成型工藝，防護等級可達IP65，耐鹽水，適用於室內外造型裝飾、建築輪廓、城市夜景照明等。

GL-SW-NFT1212 LED正發光無影燈一體擠出型



功率 Watts	12W (Meter)
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	50lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	WH□

Available

ON/OFF

TRIAC

0-10V

DALI

PLC

Dimmable



CE

CB

IP 65

UGR<19

GL-SW-NFS1212 LED側發光無影燈一體擠出型



功率 Watts	12W (Meter)
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	50lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	WH□

Available

ON/OFF

TRIAC

0-10V

DALI

PLC

Dimmable




CE

CB

IP 65

UGR<19

GL-SW-NFT1616 LED正發光無影燈一體擠出型



功率 Watts	15W (Meter)
色溫 Color temperature	RGBW (3000K/4000K) / 2700K-5000K
光效 Light efficiency	50lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	WH□

Available

ON/OFF

TRIAC

0-10V

DALI

PLC

Dimmable

Tunable white

RGBW



CE

CB

IP 65

UGR<19

GL-SW-NFS1616 LED側發光無影燈一體擠出型



功率 Watts	15W (Meter)
色溫 Color temperature	RGBW (3000K/4000K) / 2700K-5000K
光效 Light efficiency	50lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	WH□

Available

ON/OFF

TRIAC

0-10V

DALI

PLC

Dimmable

Tunable white

RGBW


CE

CB

IP 65

UGR<19

GL-SW-NF3D1616B LED3D款無影燈一體擠出型 *正、側共用



功率 Watts	12W (Meter)
色溫 Color temperature	3000K / 3500K / 4000K
光效 Light efficiency	50lm/W
角度 Beam angle	110°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	WH□

Available

ON/OFF

TRIAC

0-10V

DALI

PLC

Dimmable

CE

CB

IP 65

UGR<19



Unconventional specifications, please consult the seller first
非常規規格產品請先與賣家溝通

BARRISOL SERIES


The biggest advantage is that there is no need to consider the distance between the light strips and cause problems such as dark areas.

The minimum depth of the light source and the barrisol is only 8cm to meet the uniform effect.

最大優勢是無需考慮燈帶之間的距離而造成暗區等問題。光源與拉膜的最小深度僅需8cm即可滿足均勻效果。

GL-SW120



LED單色溫軟模組



功率 Watts	10W
色溫 Color temperature	3000K / 3500K / 4000K
光效 Light efficiency	1040lm/PCS
角度 Beam angle	N/A
顯指 Color rendering index	≥90
電壓 Voltage	DC24V (需配置變壓器DRIVER REQUIRED)
顏色 Color	N/A
Available	ON/OFF TRIAC 0-10V DALI PLC Dimmable CCC CE CB IP 20

GL-SW576CTA


LED雙色溫軟模組



功率 Watts	15W
色溫 Color temperature	2700K-6000K
光效 Light efficiency	1453lm/PCS
角度 Beam angle	N/A
顯指 Color rendering index	≥90
電壓 Voltage	DC24V (需配置變壓器DRIVER REQUIRED)
顏色 Color	N/A
Available	ON/OFF 0-10V DALI PLC Dimmable Tunable white CCC CE CB IP 20

GL-SW162RGB


LED RGB軟模組



功率 Watts	18W
色溫 Color temperature	RGB
光效 Light efficiency	N/A
角度 Beam angle	N/A
顯指 Color rendering index	≥90
電壓 Voltage	DC24V (需配置變壓器DRIVER REQUIRED)
顏色 Color	N/A
Available	ON/OFF DMX DALI PLC Dimmable RGB CCC CE CB IP 20

GL-SW162RGBW

LED RGBW軟模組



功率 Watts	24W
色溫 Color temperature	RGBW (W:3000K/4000/6000K (OPTIONS))
光效 Light efficiency	N/A
角度 Beam angle	N/A
顯指 Color rendering index	≥90
電壓 Voltage	DC24V (需配置變壓器DRIVER REQUIRED)
顏色 Color	N/A
Available	ON/OFF DMX DALI PLC Dimmable RGB CCC CE CB IP 20


Installation
It can be installed on smooth and curved surface.



Cutttable
It's cuttable basing on the cutting line. Please ture off the power when cutting.



Welding and splicing
Easy welding and splicing with fast one - touch connector, helpful for construction.






安裝
它可以安裝在光滑和彎曲的表面上




可裁剪
它可以根據切割線進行切割，裁剪時請關閉電源。




焊接和拼接
快速一鍵式輕鬆焊接和拼接連接器，有利於施工。

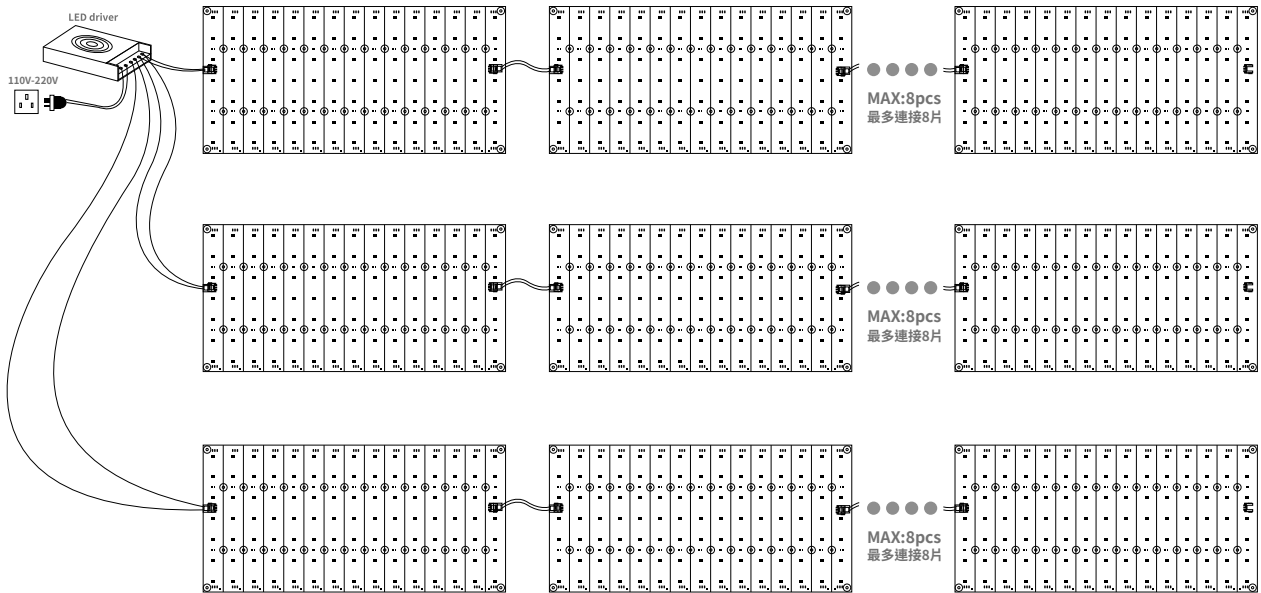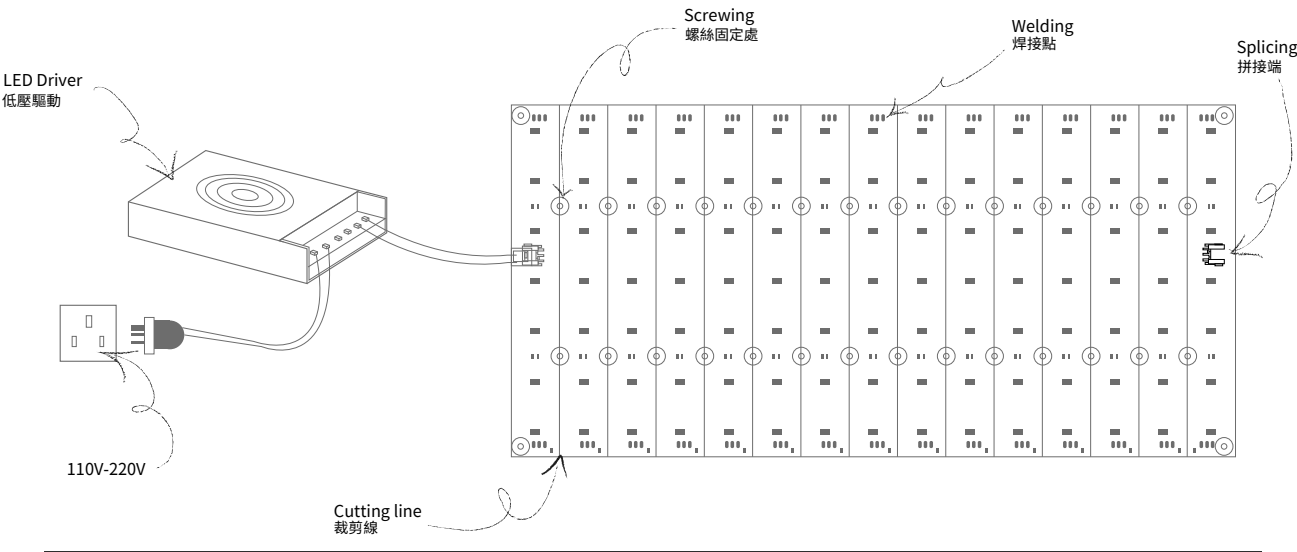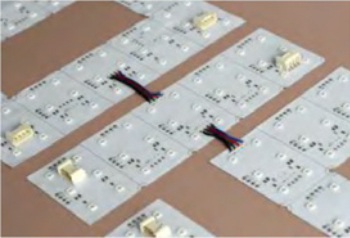

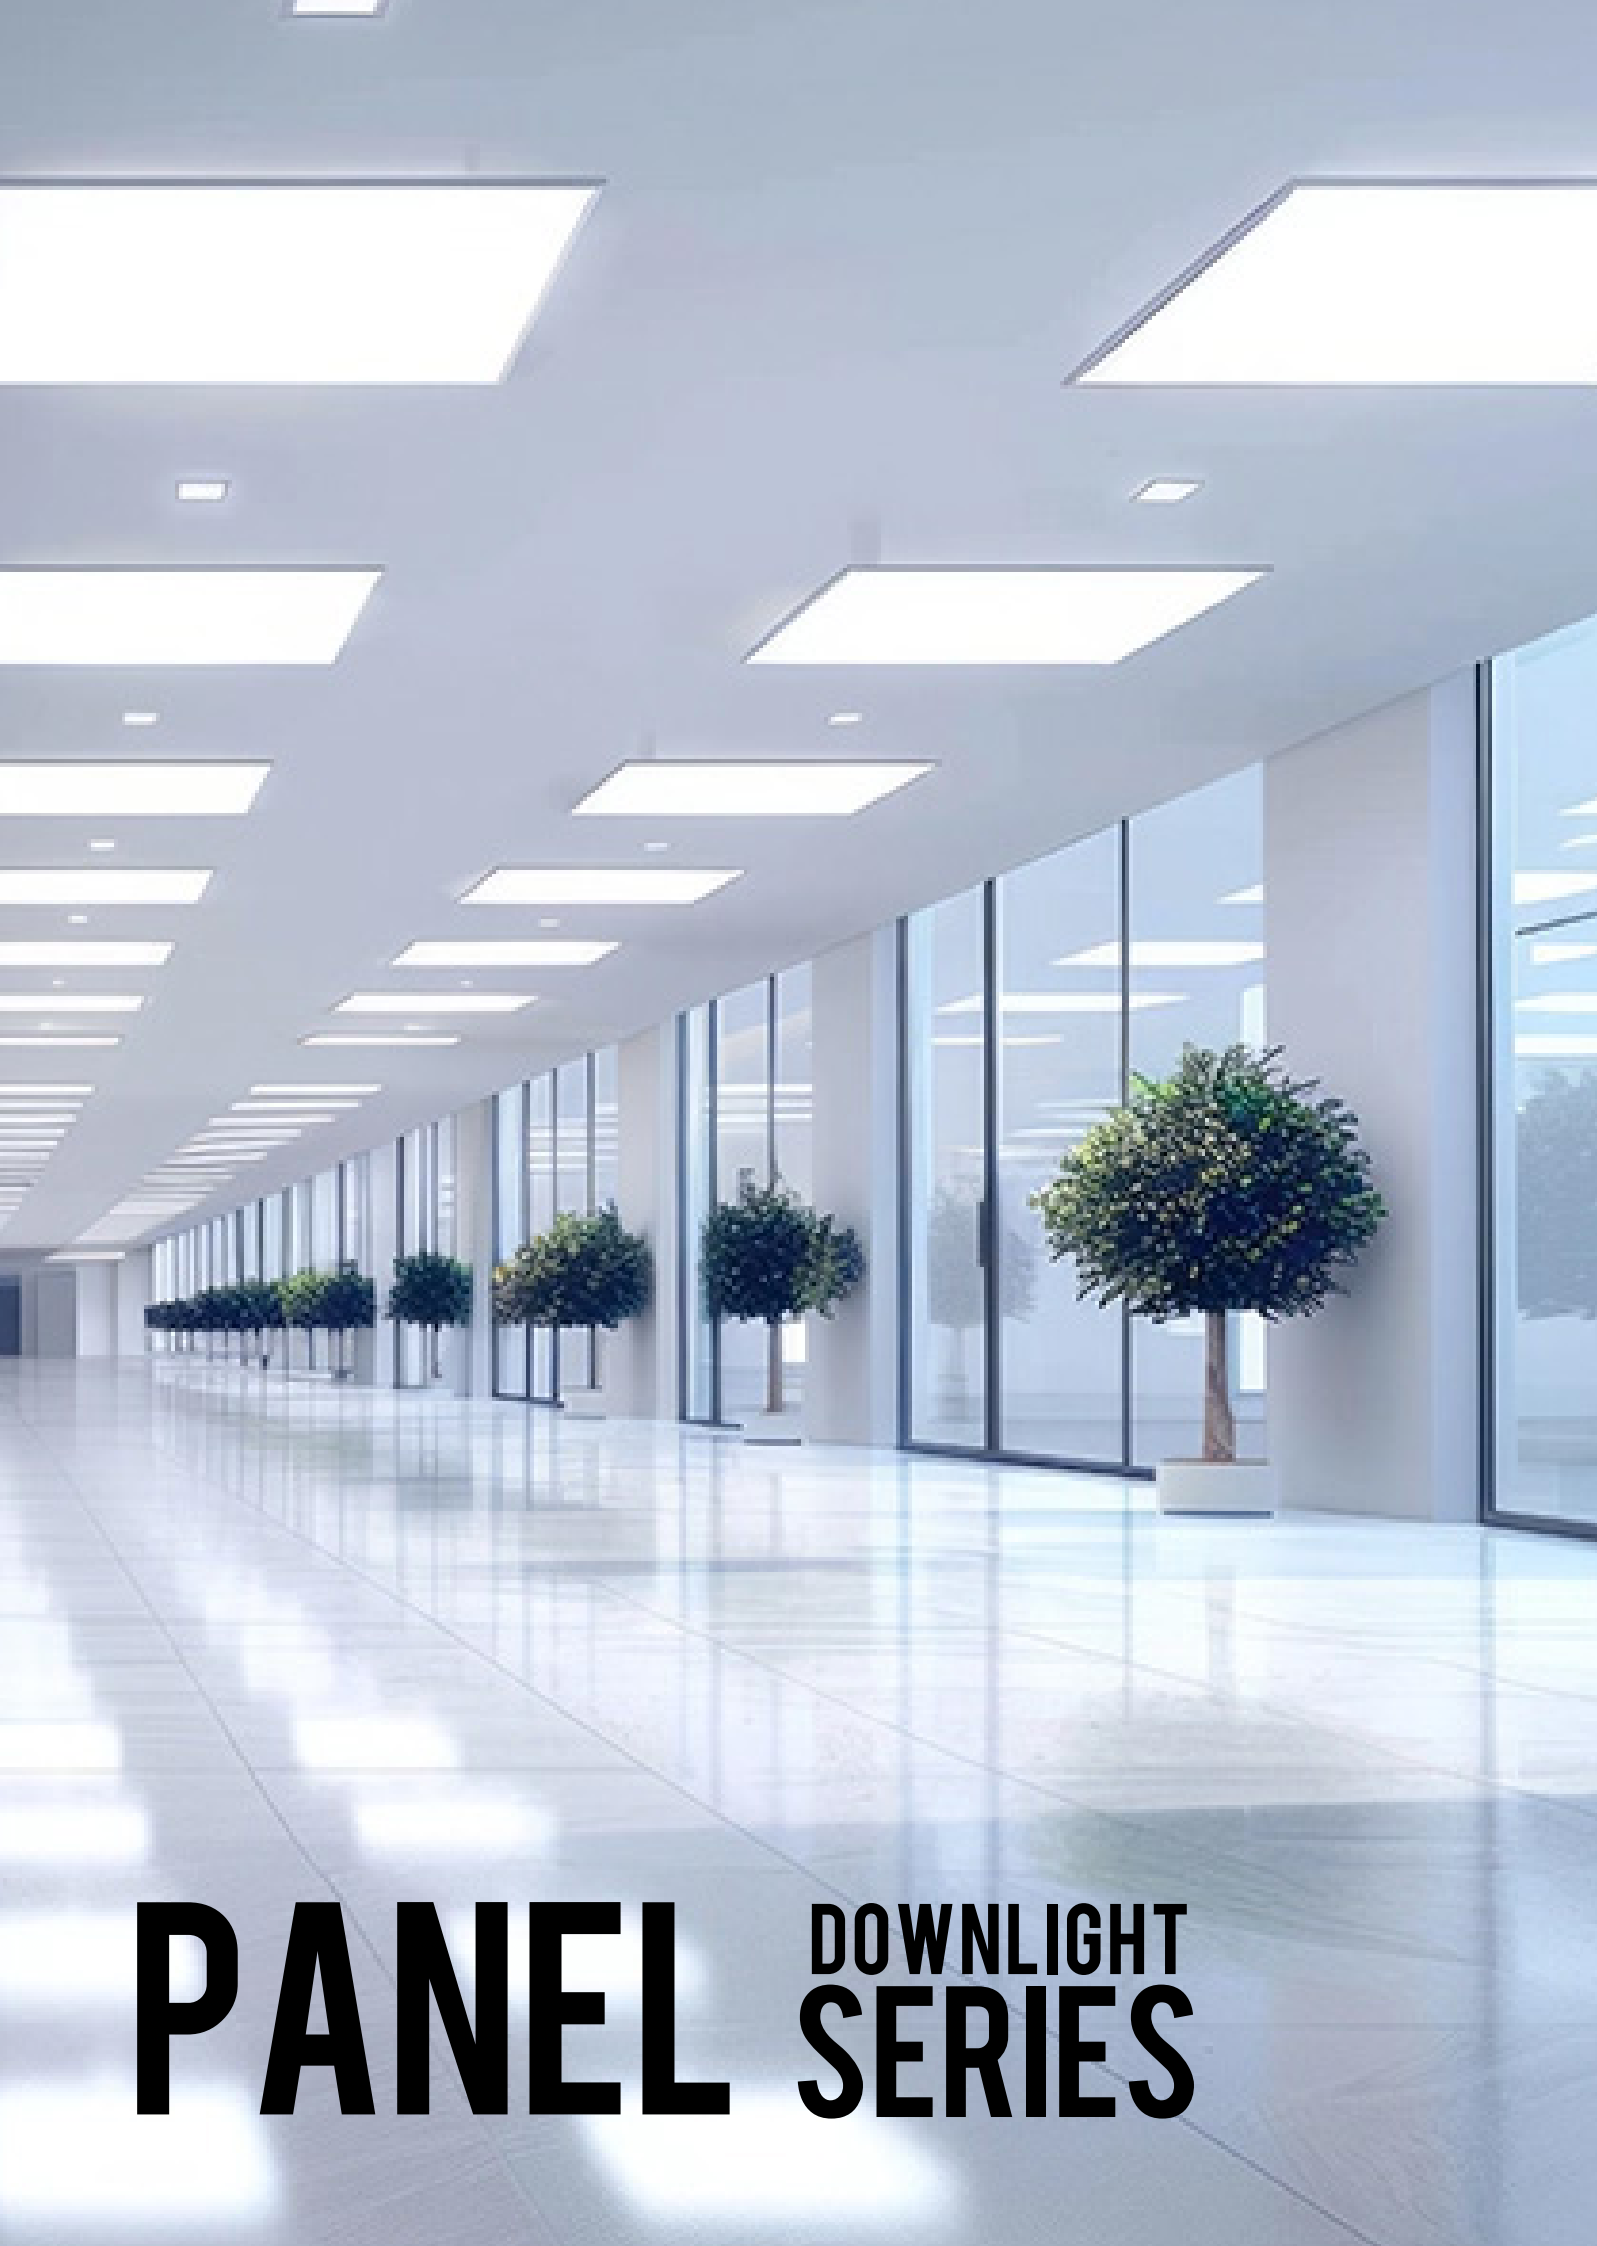

PANEL DOWNLIGHT SERIES


GL-JL-KMTH600X600 LED直下式面板燈

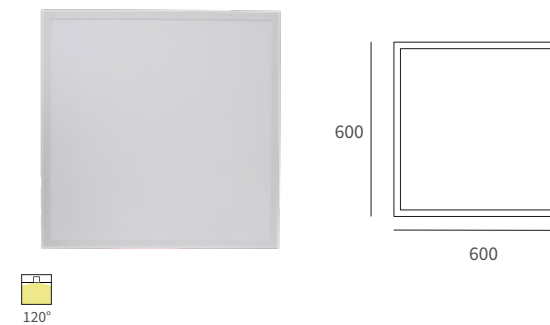

功率 Watts	40W (Meter)
色溫 Color temperature	4000K/6000K
光效 Light efficiency	150lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥80
電壓 Voltage	AC 100/277V
顏色 Color	White
Available	PLC



GL-JL-KMTH600X1200 LED直下式面板燈

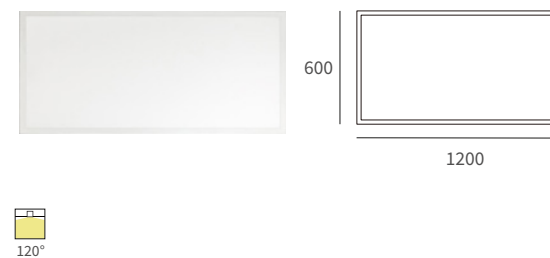


功率 Watts	48W (Meter)
色溫 Color temperature	4000K/6000K
光效 Light efficiency	150lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥80
電壓 Voltage	AC 100/277V
顏色 Color	White
Available	PLC



Unconventional specifications, please consult the seller first
非常規規格產品請先與賣家溝通



INSTALLING SWITCH 安裝方式

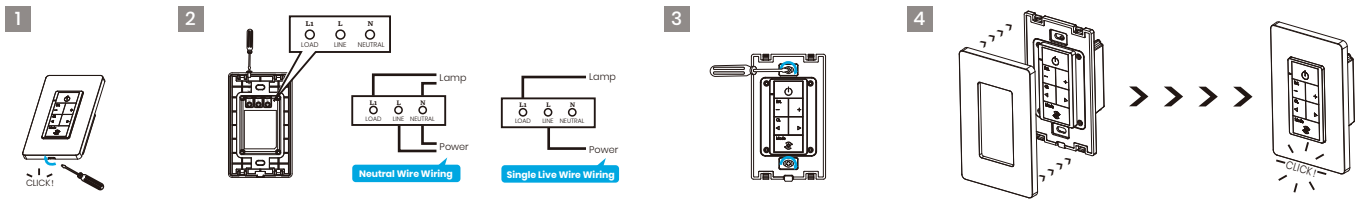

- 1


Open the front cover with a small flat head screwdriver.
使用小型平頭螺絲起子打開前蓋。
- 2

Connect the wire to the terminals as needed and tighten the screws.
It is necessary to connect all wires to the appropriate connectors.
根據需要將電線連接到端子，並擰緊螺絲。必須將所有電線連接到相應的接頭上。
- 3

Fix the switch chassis to the mounting bracket or box using
supplied screws as shown after wire connected.
在電線連接完成後，使用隨附的螺絲將開關底座固定在安裝支架或安裝盒上。
- 4


Reattach the face plate securely.
將面板重新牢固地安裝回去。

GL-PLC LED雙色溫直下式面板燈600*600

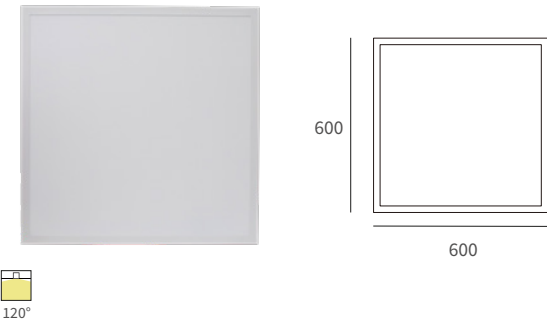


功率 Watts	40W (Meter)
色溫 Color temperature	2700K - 6500K
光效 Light efficiency	150lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥80
電壓 Voltage	AC 110/220V
顏色 Color	White
Available PLC	

GL-PLC LED雙色溫直下式面板燈600*1200

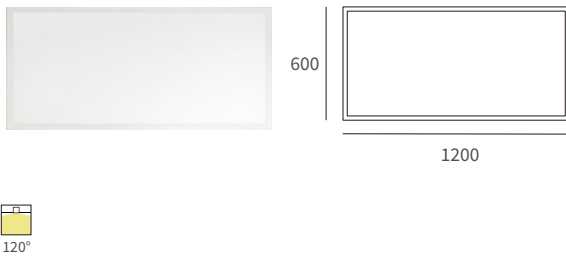


功率 Watts	72W (Meter)
色溫 Color temperature	2700K - 6500K
光效 Light efficiency	150lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥80
電壓 Voltage	AC 100-277V
顏色 Color	White
Available PLC	

GL-PLC 800W LED雙色溫平板燈壁切開關面板

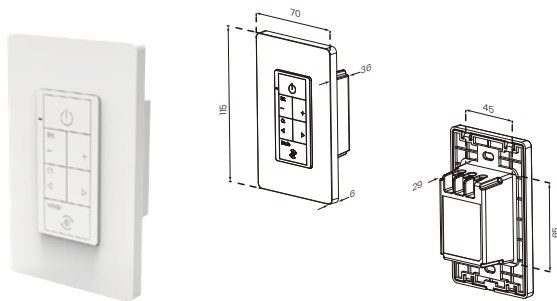

功率 Watts	800W (Meter)
色溫 Color temperature	2700K - 6500K
光效 Light efficiency	150lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥80
電壓 Voltage	AC 120V(Max:800W) - 277V(Max:1600W)
顏色 Color	White
Available PLC	



GL-PLC 1100W LED雙色溫平板燈壁切開關面板

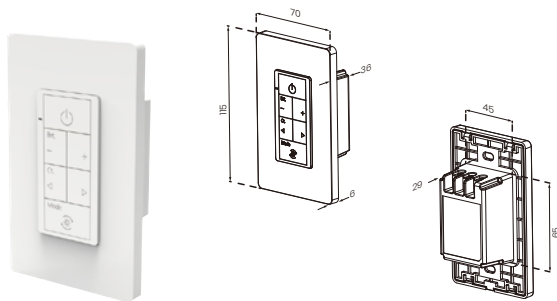

功率 Watts	1100W (Meter)
色溫 Color temperature	2700K - 6500K
光效 Light efficiency	150lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥80
電壓 Voltage	AC 120V(Max:1100W) - 277V(Max:2200W)
顏色 Color	White
Available PLC	

Unconventional specifications, please consult the seller first
非常規規格產品請先與賣家溝通

POT SERIES

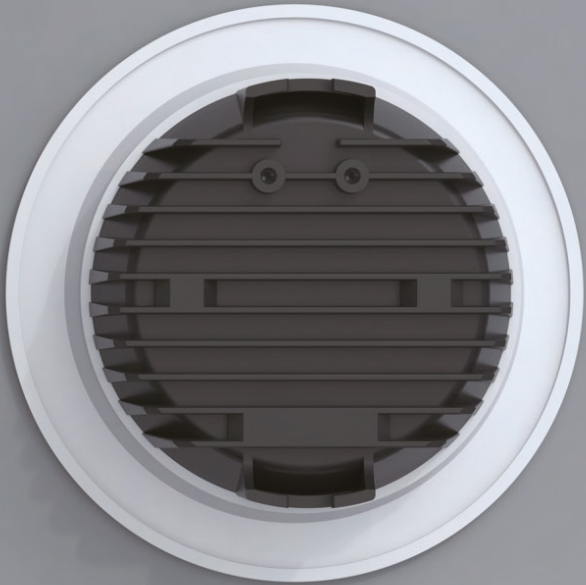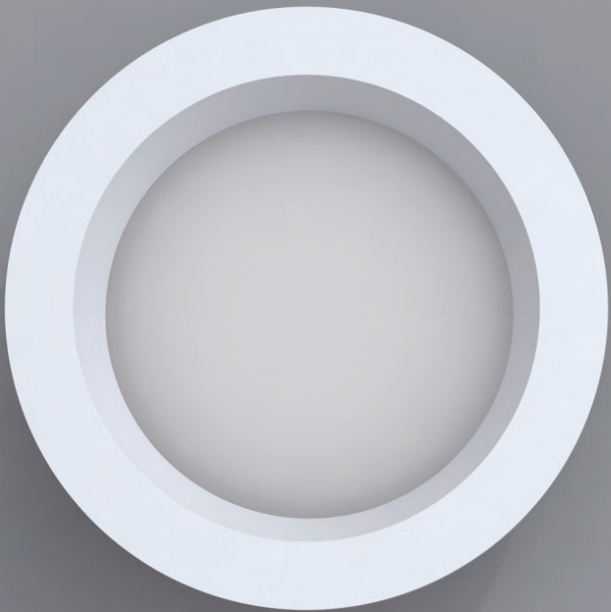


GL-XW2325

LED嵌入式筒燈



120°



功率 Watts	5W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	70lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	AC110V-220V
顏色 Color	White

Available
ON/OFF
TRIAC
0-10V
DALI
PLC



Dimmable




GL-XW2330

LED嵌入式筒燈



120°



功率 Watts	7W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	70lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	AC110V-220V
顏色 Color	White

Available
ON/OFF
TRIAC
0-10V
DALI
PLC



Dimmable




GL-XW2340

LED嵌入式筒燈



120°



功率 Watts	12W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	70lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	AC110V-220V
顏色 Color	White

Available
ON/OFF
TRIAC
0-10V
DALI
PLC



Dimmable




GL-XW2360

LED嵌入式筒燈



120°



功率 Watts	12W / 15W / 18W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	70lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	AC110V-220V
顏色 Color	White

Available
ON/OFF
TRIAC
0-10V
DALI
PLC




Dimmable



Unconventional specifications, please consult the seller first
非常規規格產品請先與賣家溝通



SPOT SERIES

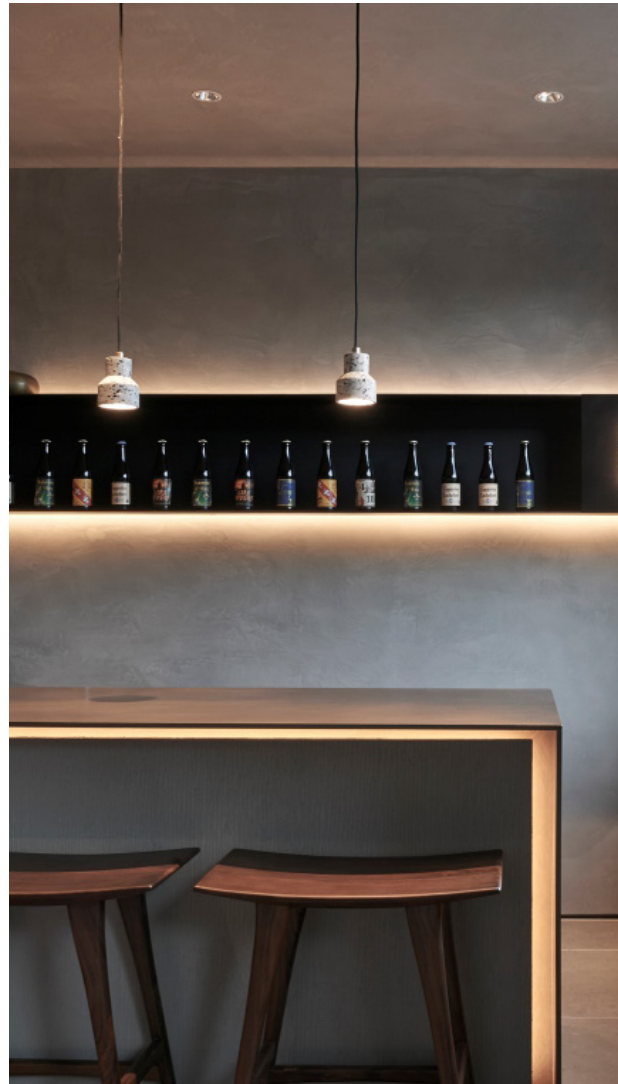

GL-XW1306

LED嵌入式射燈

-W:白色 -B:黑色



功率 Watts	7W / 9W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	80lm/W
角度 Beam angle	15° / 24° / 38°
顯指 Color rendering index	≥90
電壓 Voltage	AC110V-220V
顏色 Color	White / Black

Available

ON/OFF

TRIAC

0-10V

DALI

PLC




Dimmable



GL-XW1395T

LED嵌入式射燈

-W:白色 -B:黑色



功率 Watts	9W / 12W / 15W / 18W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	80lm/W
角度 Beam angle	15° / 24° / 36°
顯指 Color rendering index	≥90
電壓 Voltage	AC110V-220V
顏色 Color	White / Black

Available

ON/OFF

TRIAC

0-10V

DALI

PLC



Dimmable



Accessories(option)/Decorative reflector(selection) 配件(選配)/裝飾反光杯(選擇)



Unconventional specifications, please consult the seller first

非常規規格產品請先與賣家溝通



TORNADOLIGHT SERIES

Family design, accessories diversification, to meet different lighting needs, omni-directional lighting services, suitable for Villa level, commercial restaurants, hotels, pavilions and other applications.


龍捲風·天花射燈系列，家族化設計，配件多樣化，滿足不同的照明需求，全方位燈光服務，適用於別墅平層、商業餐廳、酒店、展館等多種應用領域。



GL-XJE23055A

LED有邊框嵌入式可調節射燈

-W:白色 -B:黑色

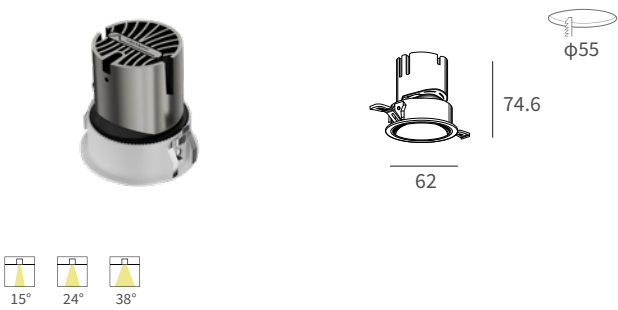

功率 Watts	7W / 9W
色溫 Color temperature	2700k / 3000K / 3500k / 4000K / 2700K-6000K
光效 Light efficiency	65lm/W
角度 Beam angle	15° / 24° / 38°
顯指 Color rendering index	≥95
電壓 Voltage	AC110V-220V
顏色 Color	White / Black

Available

ON/OFF
TRIAC
0-10V
DALI
PLC




Decorative reflector(selection) 裝飾反光杯(選擇)



GL-XJE23075A

LED有邊框嵌入式可調節射燈

-W:白色 -B:黑色

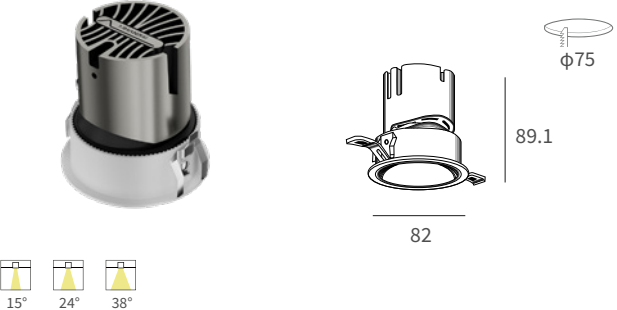

功率 Watts	9W / 12W
色溫 Color temperature	2700k / 3000K / 3500k / 4000K / 2700K-6000K
光效 Light efficiency	65lm/W
角度 Beam angle	15° / 24° / 38°
顯指 Color rendering index	≥95
電壓 Voltage	AC110V-220V
顏色 Color	White / Black

Available

ON/OFF
TRIAC
0-10V
DALI
PLC



Decorative reflector(selection) 裝飾反光杯(選擇)




Unconventional specifications, please consult the seller first
非常規規格產品請先與賣家溝通

THIN SERIES

GL-SKC033103

LED薄款嵌入式射燈



功率 Watts	3W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	51lm/W
角度 Beam angle	24°
顯指 Color rendering index	≥90
電壓 Voltage	AC110V / AC220V
顏色 Color	White

Available

ON/OFF

TRIAC

0-10V

DALI



PLC



GL-XW-DZSD37

LED薄款嵌入式射燈

-W:白色 -B:黑色



功率 Watts	7W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	85lm/W
角度 Beam angle	15° / 24° / 36°
顯指 Color rendering index	≥90
電壓 Voltage	AC110V / AC220V
顏色 Color	White / Black

Available

ON/OFF

TRIAC

0-10V

DALI


PLC



GL-XW-DZSD37N

LED薄款嵌入式射燈

-W:白色 -B:黑色



功率 Watts	12W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	85lm/W
角度 Beam angle	15° / 24° / 36°
顯指 Color rendering index	≥90
電壓 Voltage	AC110V / AC220V
顏色 Color	White / Black

Available

ON/OFF

TRIAC

0-10V

DALI

PLC




Unconventional specifications, please consult the seller first

非常規規格產品請先與賣家溝通

ZOOM RECESSED SPOTLIGHT

GL-WD35-ZPDB-A107 LED豌豆射燈



功率 Watts	7W
色溫 Color temperature	3000K
光效 Light efficiency	45lm/W
角度 Beam angle	8° - 45°
顯指 Color rendering index	≥90
電壓 Voltage	AC110-220V
顏色 Color	Black

Available

ON/OFF

TRIAC

0-10V


DALI

PLC



GL-WX35 LED萬向35調焦射燈

-W:白色 -B:黑色



功率 Watts	7W
色溫 Color temperature	3000K
光效 Light efficiency	70lm/W
角度 Beam angle	8° - 36°
顯指 Color rendering index	≥80
電壓 Voltage	AC110-220V
顏色 Color	White / Black

Available

ON/OFF

TRIAC

0-10V


DALI

PLC



GL-WX75-MNDB2810 LED漫反射射燈

-W:白色 -B:黑色



功率 Watts	10W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	70lm/W
角度 Beam angle	28°
顯指 Color rendering index	≥95
電壓 Voltage	AC110V-220V
顏色 Color	White / Black

Available

ON/OFF

TRIAC

0-10V


DALI

PLC




Unconventional specifications, please consult the seller first

非常規規格產品請先與賣家溝通

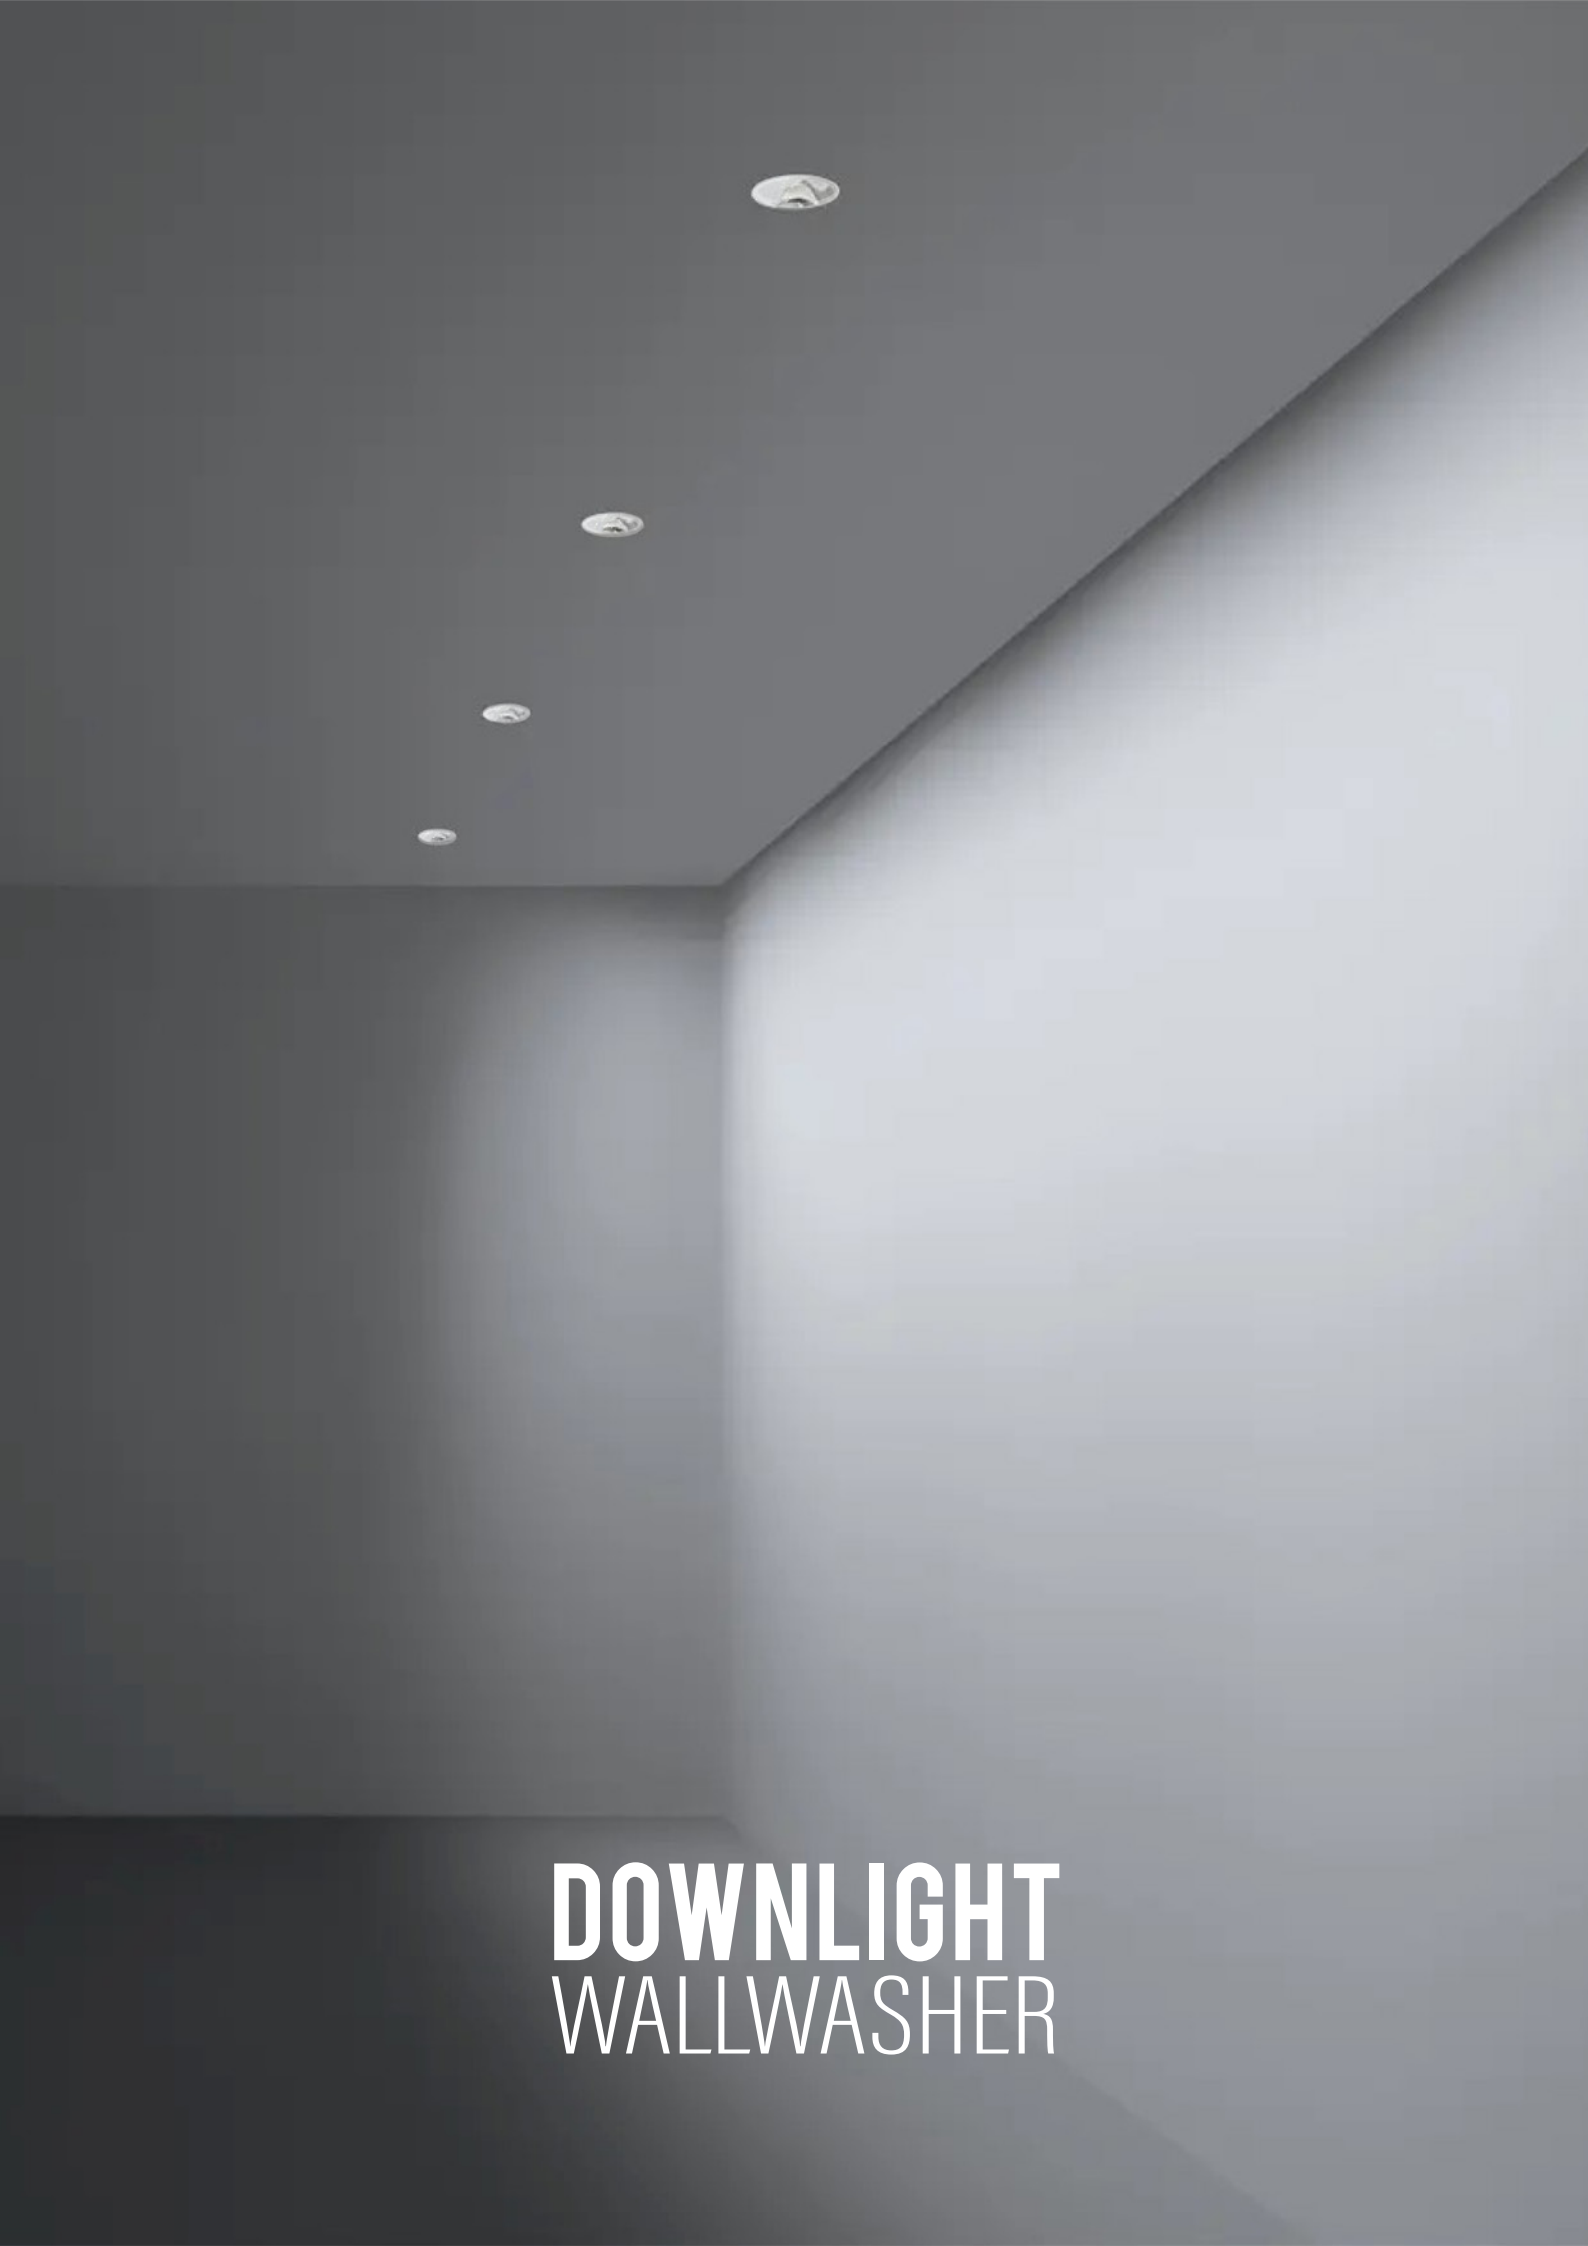


DOWNLIGHT
WALLWASHER

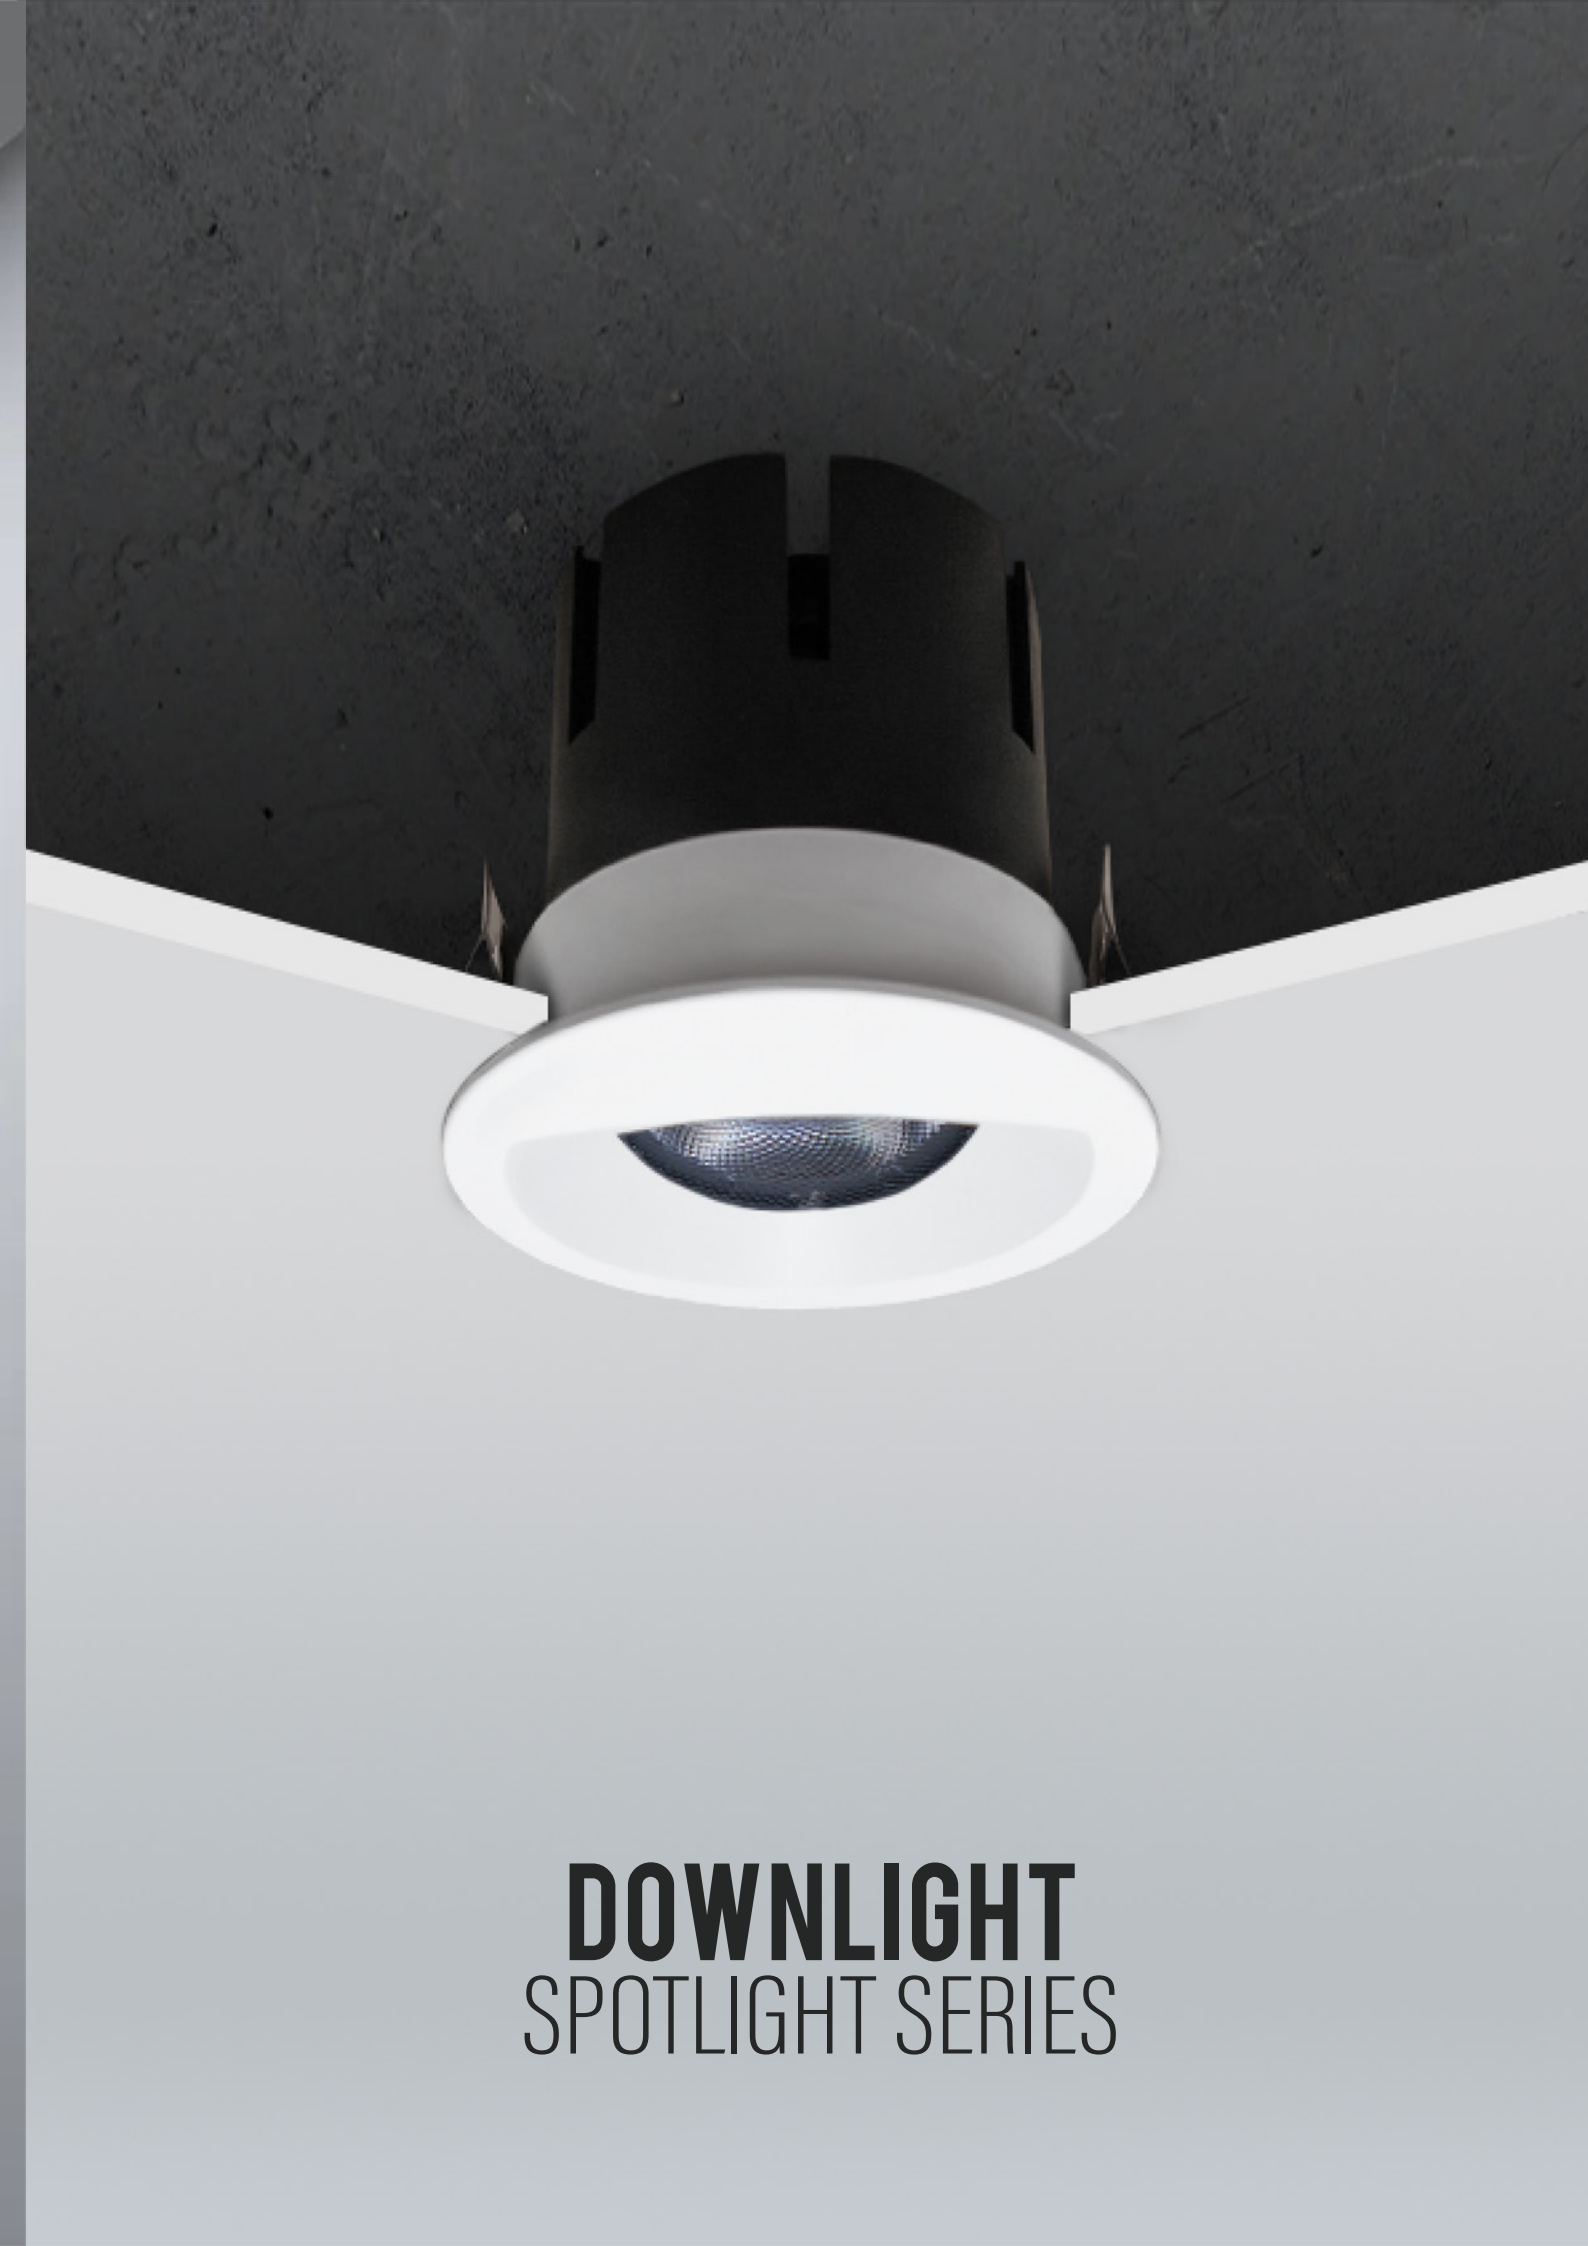

DOWNLIGHT
SPOTLIGHT SERIES

GL-ST8376-P75P LED有邊嵌入式偏光洗牆射燈



功率 Watts	12W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	65lm/W
角度 Beam angle	Wallwasher
顯指 Color rendering index	≥90
電壓 Voltage	AC110V-220V
顏色 Color	White / Black

Available

ON/OFF

TRIAC

0-10V

DALI

PLC

Dimmable

CCC


CE

CB

IP 20

UGR<19

GL-ST1275 LED鏡前射燈



功率 Watts	12W
色溫 Color temperature	3000K / 3500K / 4000K
光效 Light efficiency	79lm/W
角度 Beam angle	非對稱雙偏光
顯指 Color rendering index	≥90
電壓 Voltage	AC110V-220V
顏色 Color	White

Available

ON/OFF

TRIAC

0-10V

DALI

PLC

Dimmable

CCC


CE

CB

IP 20

UGR<19

GL-ST8486-S75Q LED嵌入式射燈(金屬面環)



功率 Watts	12W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	70lm/W
角度 Beam angle	24°
顯指 Color rendering index	≥95
電壓 Voltage	AC110-220V
顏色 Color	White

Available

ON/OFF

TRIAC

0-10V

DALI

PLC

Dimmable

CCC

CE

CB

25°

IP 20

UGR<19

Decorative reflector(selection) 裝飾反光杯(選擇)

white 白色

dark chrome 暗色


black 黑色

chrome 鍍色





GL-TZ-L55Y-1 LED有邊框嵌入式拉伸燈 -W:白色 -B:黑色



功率 Watts	7W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	75lm/W
角度 Beam angle	15° / 24° / 36°
顯指 Color rendering index	≥80
電壓 Voltage	AC110V-220V
顏色 Color	White / Black


Available
ON/OFF
TRIAC
0-10V
DALI
PLC

 Dimmable

Accessories(option) 配件(選配)
 Honeycomb mesh 防蚊蜂網

GL-TZ-L75Y-1 LED有邊框嵌入式拉伸燈 -W:白色 -B:黑色




功率 Watts	15W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	75lm/W
角度 Beam angle	15° / 24° / 36°
顯指 Color rendering index	≥80
電壓 Voltage	AC110V-220V
顏色 Color	White / Black

Available
ON/OFF
TRIAC
0-10V
DALI
PLC

 Dimmable

GL-TZ-L95Y-1 LED有邊框嵌入式拉伸燈 -W:白色 -B:黑色



功率 Watts	25W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	75lm/W
角度 Beam angle	15° / 24° / 36°
顯指 Color rendering index	≥80
電壓 Voltage	AC110V-220V
顏色 Color	White / Black

Available
ON/OFF
TRIAC
0-10V
DALI
PLC

 Dimmable




FIND SERIES

GL-XW4101

LED 有邊單頭嵌入式射燈

-W:白色 -B:黑色



功率 Watts	7W / 9W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	72lm/W
角度 Beam angle	24° / 38°
顯指 Color rendering index	≥90
電壓 Voltage	AC110V~220V
顏色 Color	White / Black

Available
ON/OFF
TRIAC
0-10V
DALI
PLC




Decorative reflector(selection) 裝飾反光杯(選擇)



GL-XW4102

LED 有邊雙頭嵌入式射燈

-W:白色 -B:黑色



功率 Watts	2*7W / 2*9W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	72lm/W
角度 Beam angle	24° / 38°
顯指 Color rendering index	≥90
電壓 Voltage	AC110V~220V
顏色 Color	White / Black

Available
ON/OFF
TRIAC
0-10V
DALI
PLC





Decorative reflector(selection) 裝飾反光杯(選擇)



GL-WB4401

LED 無邊單頭嵌入式射燈

-W:白色 -B:黑色



功率 Watts	10W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	72lm/W
角度 Beam angle	24° / 38° / 60°
顯指 Color rendering index	≥90
電壓 Voltage	AC110V~220V
顏色 Color	White / Black



Available
ON/OFF
TRIAC
0-10V
DALI
PLC



GL-WB4402

LED 無邊雙頭嵌入式射燈

-W:白色 -B:黑色

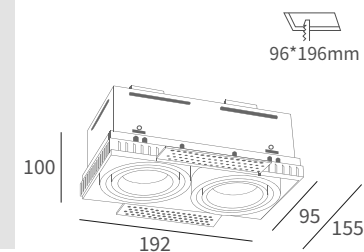


功率 Watts	2*10W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	70lm/W
角度 Beam angle	24° / 38° / 60°
顯指 Color rendering index	≥90
電壓 Voltage	AC110V~220V
顏色 Color	White / Black

Available
ON/OFF
TRIAC
0-10V
DALI
PLC



Unconventional specifications, please consult the seller first



非常規規格產品請先與賣家溝通

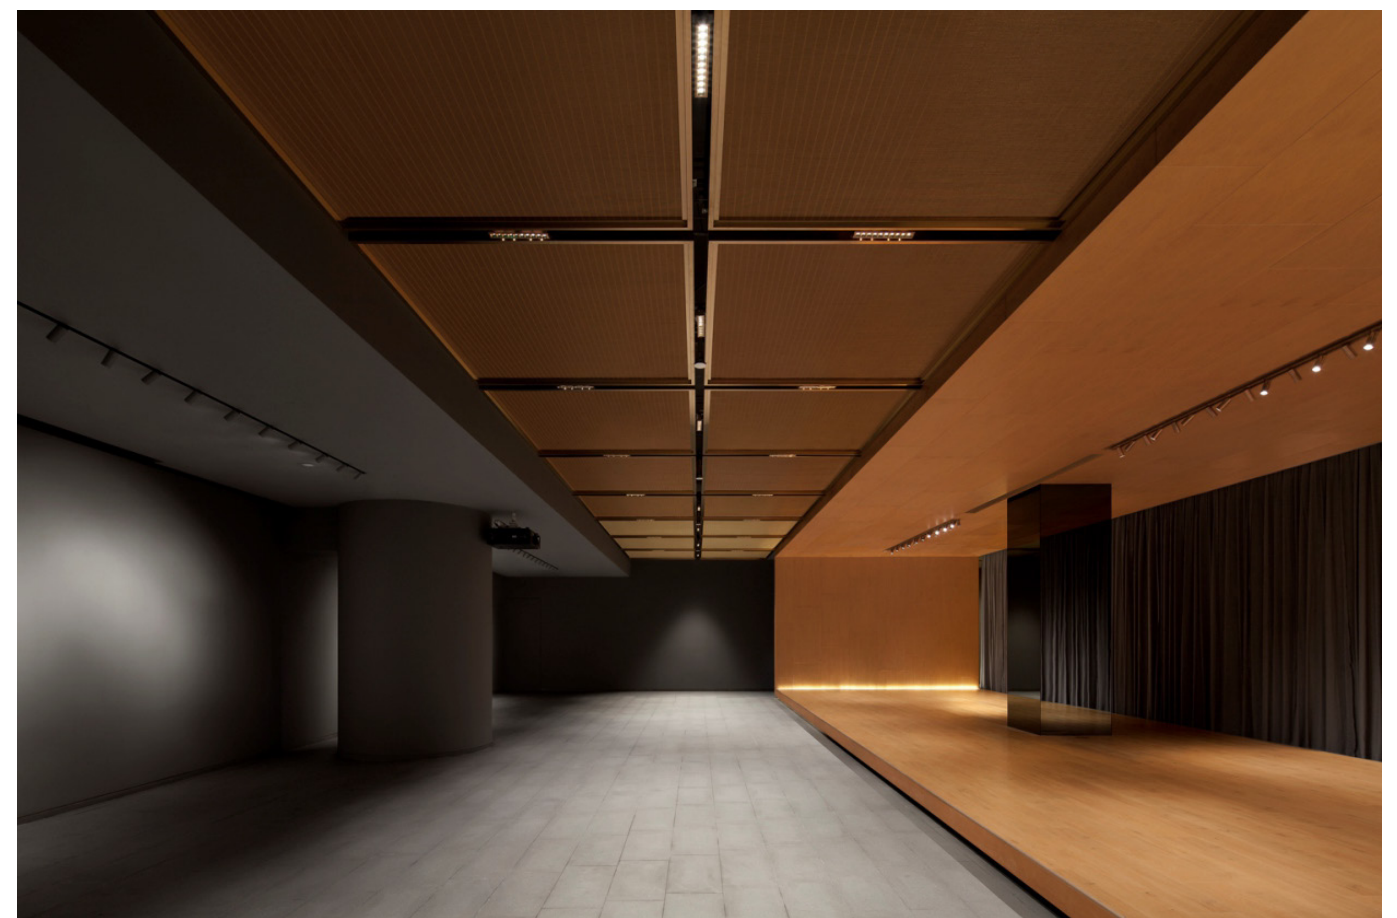

GL-JRST01

LED固定式無邊下照單頭射燈

-W:白色 -B:黑色



42*41mm

79.3

49



41.3

功率 Watts	2W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	70lm/W
角度 Beam angle	22° / 36° / 45°
顯指 Color rendering index	≥90
電壓 Voltage	AC110-220V
顏色 Color	White / Black
Available	Dimmable IP20 IP65 CCC CE CB IP 20 RoHS10 ON/OFF TRIAC 0-10V DALI PLC

GL-JRST02

LED固定式無邊下照雙頭射燈

-W:白色 -B:黑色



72*41mm

79.3

49



71.3

功率 Watts	4W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	70lm/W
角度 Beam angle	22° / 36° / 45°
顯指 Color rendering index	≥90
電壓 Voltage	AC110-220V
顏色 Color	White / Black
Available	Dimmable IP20 IP65 CCC CE CB IP 20 RoHS10 ON/OFF TRIAC 0-10V DALI PLC

GL-JRST05

LED固定式無邊下照五頭射燈

-W:白色 -B:黑色



144*41mm

79.3

49



143.7

功率 Watts	10W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	70lm/W
角度 Beam angle	22° / 36° / 45°
顯指 Color rendering index	≥90
電壓 Voltage	AC110-220V
顏色 Color	White / Black
Available	Dimmable IP20 CCC CE CB IP 20 RoHS10 ON/OFF TRIAC 0-10V DALI PLC

GL-JRST10

LED固定式無邊下照十頭射燈

-W:白色 -B:黑色

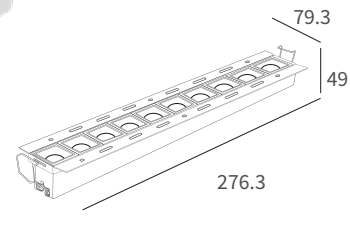

277*41mm

79.3

49



276.3

功率 Watts	20W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	70lm/W
角度 Beam angle	22° / 36° / 45°
顯指 Color rendering index	≥90
電壓 Voltage	AC110-220V
顏色 Color	White / Black
Available	Dimmable IP20 CCC CE CB IP 20 RoHS10 ON/OFF TRIAC 0-10V DALI PLC

GL-JRS01

LED固定式有邊下照單頭射燈

-W:白色 -B:黑色



37*37

45

49



45

功率 Watts	2W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	70lm/W
角度 Beam angle	15° / 30° / 45°
顯指 Color rendering index	≥90
電壓 Voltage	AC110-220V
顏色 Color	White / Black
Available	Dimmable CCC CE CB IP 20 RoHS10 ON/OFF TRIAC 0-10V DALI PLC

GL-JRS02

LED固定式有邊下照雙頭射燈

-W:白色 -B:黑色



68*37

45

49



75

功率 Watts	4W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	70lm/W
角度 Beam angle	15° / 30° / 45°
顯指 Color rendering index	≥90
電壓 Voltage	AC110-220V
顏色 Color	White / Black
Available	Dimmable CCC CE CB IP 20 RoHS10 ON/OFF TRIAC 0-10V DALI PLC

GL-JRS05

LED固定式有邊下照五頭射燈

-W:白色 -B:黑色



140*37

45

49



147

功率 Watts	10W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	70lm/W
角度 Beam angle	15° / 30° / 45°
顯指 Color rendering index	≥90
電壓 Voltage	AC110-220V
顏色 Color	White / Black
Available	Dimmable CCC CE CB IP 20 RoHS10 ON/OFF TRIAC 0-10V DALI PLC

GL-JRS10

LED固定式有邊下照十頭射燈

-W:白色 -B:黑色



273*37

45

49

280

功率 Watts	20W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	70lm/W
角度 Beam angle	15° / 30° / 45°
顯指 Color rendering index	≥90
電壓 Voltage	AC110-220V
顏色 Color	White / Black
Available	Dimmable CCC CE CB IP 20 RoHS10 ON/OFF TRIAC 0-10V DALI PLC



SIMPLE SERIES



GL-XW2820

LED方形明裝射燈

-W:白色 -B:黑色




功率 Watts	9W
色溫 Color temperature	3000K / 4000K / 6000K
光效 Light efficiency	80lm/W
角度 Beam angle	20° / 40° / 60°
顯指 Color rendering index	≥90
電壓 Voltage	AC110V-220V
顏色 Color	White / Black

Available	 Dimmable	     
ON/OFF		
TRIAC	(外置驅動)	
0-10V	(外置驅動)	
DALI	(外置驅動)	
PLC	(外置驅動)	

GL-XW2825

LED方形明裝射燈

-W:白色 -B:黑色





功率 Watts	12W / 15W
色溫 Color temperature	3000K / 4000K / 6000K
光效 Light efficiency	80lm/W
角度 Beam angle	20° / 40° / 60°
顯指 Color rendering index	≥90
電壓 Voltage	AC110V-220V
顏色 Color	White / Black

Available	 Dimmable	     
ON/OFF		
TRIAC	(外置驅動)	
0-10V	(外置驅動)	
DALI	(外置驅動)	
PLC	(外置驅動)	

GL-XW2830

LED方形明裝射燈

-W:白色 -B:黑色




功率 Watts	25W
色溫 Color temperature	3000K / 4000K / 6000K
光效 Light efficiency	80lm/W
角度 Beam angle	20° / 40° / 60°
顯指 Color rendering index	≥90
電壓 Voltage	AC110V-220V
顏色 Color	White / Black

Available	 Dimmable	     
ON/OFF		
TRIAC	(外置驅動)	
0-10V	(外置驅動)	
DALI	(外置驅動)	
PLC	(外置驅動)	

GL-XW2420

LED圓形明裝射燈

-W:白色 -B:黑色



20°

40°


60°

功率 Watts	7W
色溫 Color temperature	3000K / 4000K / 6000K
光效 Light efficiency	80lm/W
角度 Beam angle	20° / 40° / 60°
顯指 Color rendering index	≥90
電壓 Voltage	AC110V-220V
顏色 Color	White / Black
Available ON/OFF (外置驅動) (external drive) TRIAC (外置驅動) (external drive) 0-10V (外置驅動) (external drive) DALI (外置驅動) (external drive) PLC (外置驅動) (external drive) Dimmable CCCCECB IP20 UGR<19	

GL-XW2425

LED圓形明裝射燈

-W:白色 -B:黑色



20°

40°


60°

功率 Watts	12W
色溫 Color temperature	3000K / 4000K / 6000K
光效 Light efficiency	80lm/W
角度 Beam angle	20° / 40° / 60°
顯指 Color rendering index	≥90
電壓 Voltage	AC110V-220V
顏色 Color	White / Black
Available ON/OFF (外置驅動) (external drive) TRIAC (外置驅動) (external drive) 0-10V (外置驅動) (external drive) DALI (外置驅動) (external drive) PLC (外置驅動) (external drive) Dimmable CCCCECB IP20 UGR<19	

GL-XW2430

LED圓形明裝射燈

-W:白色 -B:黑色



20°

40°


60°

功率 Watts	18W
色溫 Color temperature	3000K / 4000K / 6000K
光效 Light efficiency	80lm/W
角度 Beam angle	20° / 40° / 60°
顯指 Color rendering index	≥90
電壓 Voltage	AC110V-220V
顏色 Color	White / Black
Available ON/OFF (外置驅動) (external drive) TRIAC (外置驅動) (external drive) 0-10V (外置驅動) (external drive) DALI (外置驅動) (external drive) PLC (外置驅動) (external drive) Dimmable CCCCECB IP20 UGR<19	

GL-XW2440

LED圓形明裝射燈

-W:白色 -B:黑色



20°

40°


60°

功率 Watts	25W
色溫 Color temperature	3000K / 4000K / 6000K
光效 Light efficiency	80lm/W
角度 Beam angle	20° / 40° / 60°
顯指 Color rendering index	≥90
電壓 Voltage	AC110V-220V
顏色 Color	White / Black
Available ON/OFF (外置驅動) (external drive) TRIAC (外置驅動) (external drive) 0-10V (外置驅動) (external drive) DALI (外置驅動) (external drive) PLC (外置驅動) (external drive) Dimmable CCCCECB IP20 UGR<19	

GL-XW2355T-D

LED明裝筒燈

-W:白色 -B:黑色



15°

24°

38°

功率 Watts	7W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	93lm/W
角度 Beam angle	15° / 24° / 38°
顯指 Color rendering index	≥80
電壓 Voltage	AC110V-220V
顏色 Color	White / Black
Available ON/OFF (外置驅動) (external drive) TRIAC (外置驅動) (external drive) 0-10V (外置驅動) (external drive) DALI (外置驅動) (external drive) PLC (外置驅動) (external drive) Dimmable CCCCECB IP20 UGR<19	

Decorative reflector(selection) 裝飾反光杯(選擇)

bright black 亮黑

bright silver 銀鏡

ivory white 象牙白


space black 太空黑

rose gold 玫瑰金

GL-XW2375T-D

LED明裝筒燈

-W:白色 -B:黑色



15°

24°

38°

功率 Watts	9W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	90lm/W
角度 Beam angle	15° / 24° / 38°
顯指 Color rendering index	≥80
電壓 Voltage	AC110V-220V
顏色 Color	White / Black
Available ON/OFF (外置驅動) (external drive) TRIAC (外置驅動) (external drive) 0-10V (外置驅動) (external drive) DALI (外置驅動) (external drive) PLC (外置驅動) (external drive) Dimmable CCCCECB IP20 UGR<19	

Decorative reflector(selection) 裝飾反光杯(選擇)

bright black 亮黑

bright silver 銀鏡


ivory white 象牙白

space black 太空黑

rose gold 玫瑰金




Unconventional specifications, please consult the seller first
非常規規格產品請先與賣家溝通

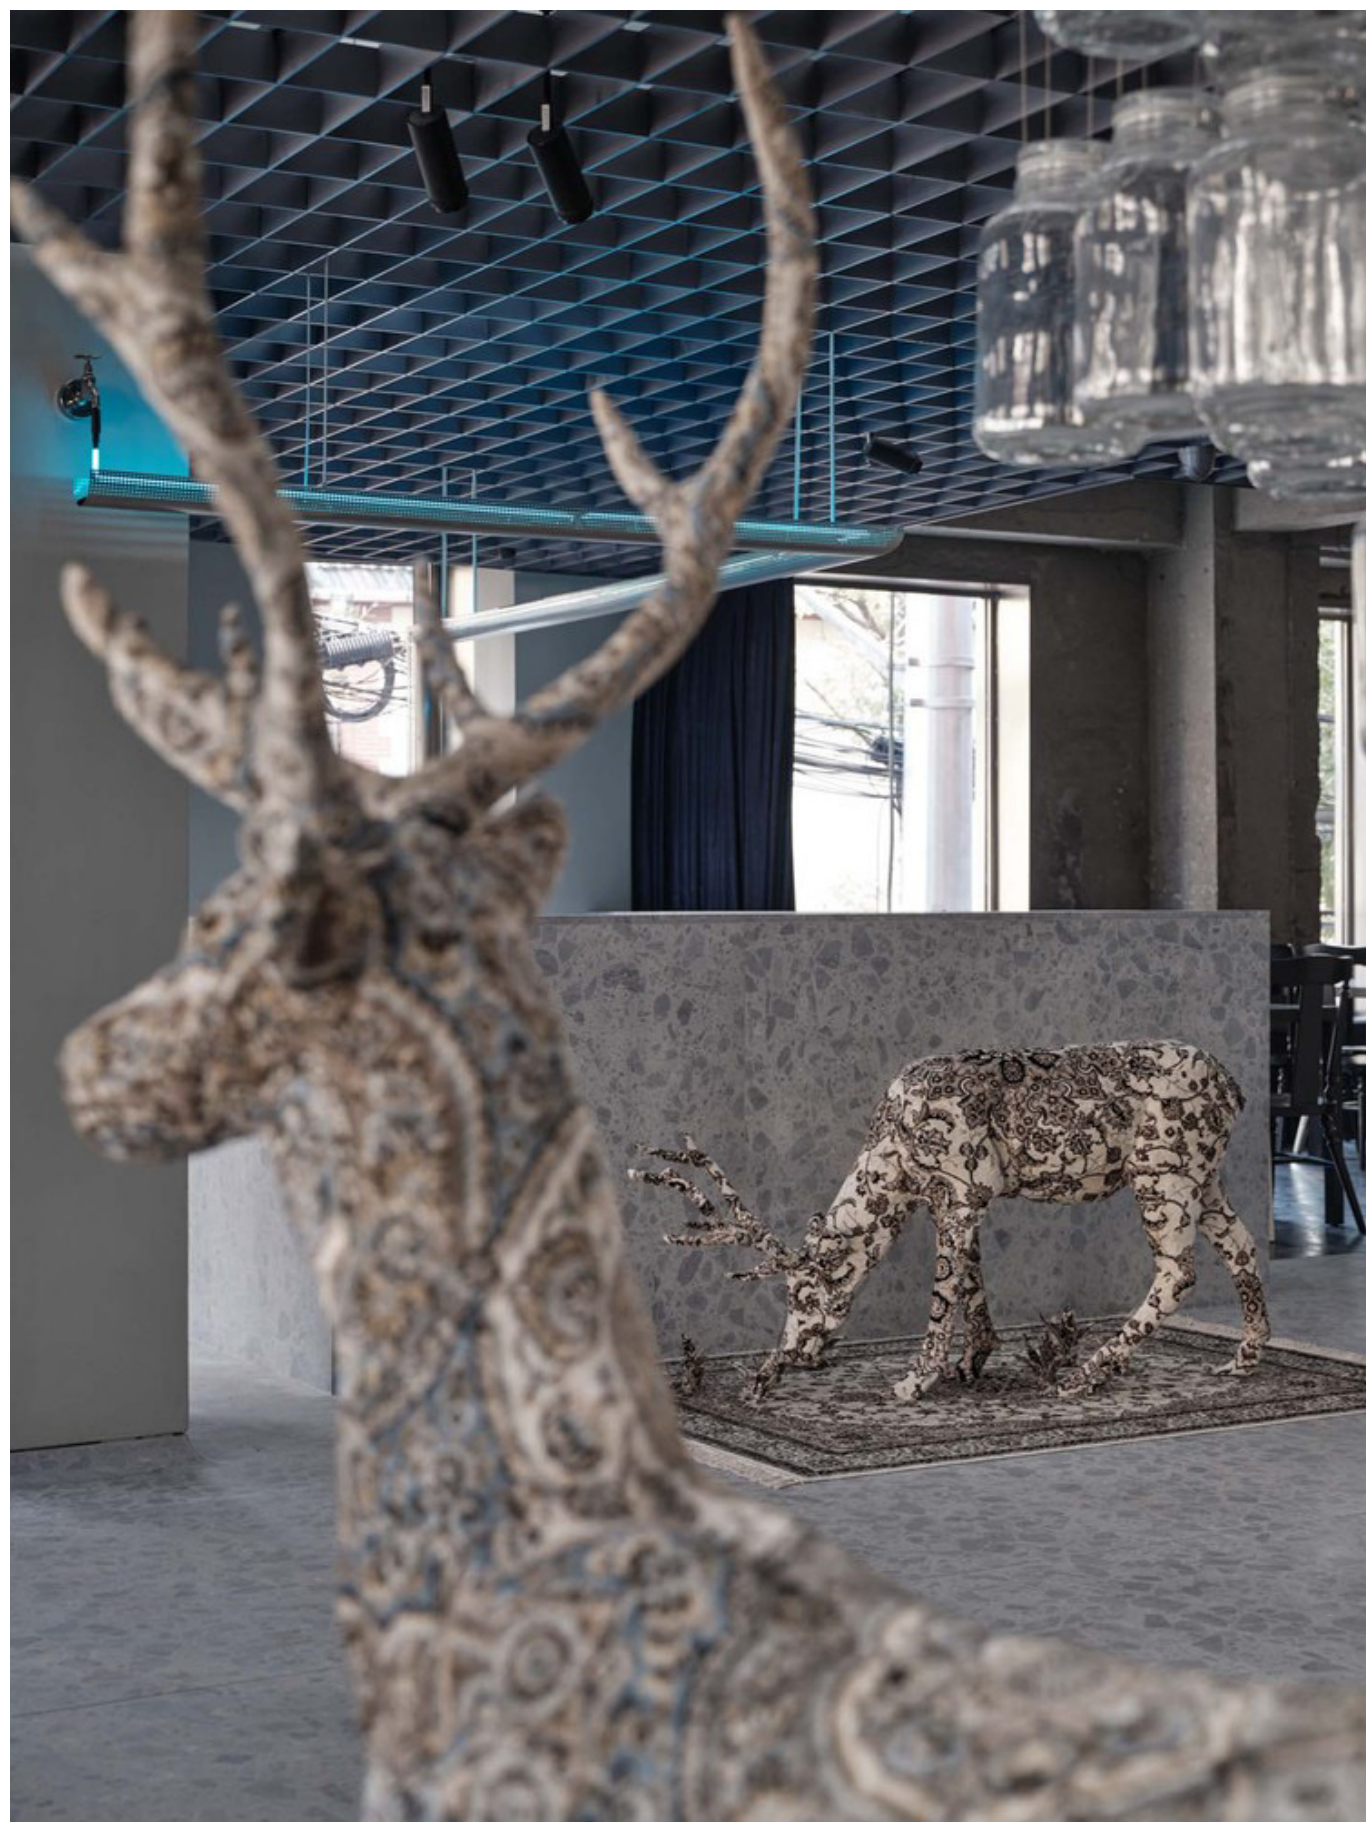

GL-XW3207T

LED 兩線軌道燈

-W:白色 -B:黑色



功率 Watts	30W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	70lm/W
角度 Beam angle	24° / 38°
顯指 Color rendering index	≥80
電壓 Voltage	AC110V-220V
顏色 Color	White / Black
Available ON/OFF (二線軌道) TRIAC (二線或三線軌道) 0-10V (四線軌道) DALI (四線或六線軌道) PLC (三線軌道)	


 Dimmable



GL-BB-DF-G60-LNDB

LED 60內建電源兩線軌道燈

-W:白色 -B:黑色



功率 Watts	12W / 18W
色溫 Color temperature	3000K / 3500K / 4000K / 6000K
光效 Light efficiency	80lm/W
角度 Beam angle	15° / 24° / 36° / 50°
顯指 Color rendering index	≥95 (擬真光)
電壓 Voltage	AC 220V
顏色 Color	White / Black
Available ON/OFF (二線軌道) TRIAC (二線或三線軌道) 0-10V (四線軌道) DALI (四線或六線軌道) PLC (三線軌道)	



 Dimmable



GL-S-L670

LED 二線軌道線型燈

-W:白色 -B:黑色



功率 Watts	22W
色溫 Color temperature	4000K / 5000K
光效 Light efficiency	80lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	AC110V-220V
顏色 Color	White / Black
Available ON/OFF (二線軌道) TRIAC (二線或三線軌道) 0-10V (四線軌道) DALI (四線或六線軌道) PLC (三線軌道)	



 Dimmable



GL-S-L1190

LED 二線軌道線型燈

-W:白色 -B:黑色



功率 Watts	44W
色溫 Color temperature	4000K / 5000K
光效 Light efficiency	80lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	AC110V-220V
顏色 Color	White / Black
Available ON/OFF (二線軌道) TRIAC (二線或三線軌道) 0-10V (四線軌道) DALI (四線或六線軌道) PLC (三線軌道)	


 Dimmable







JW SPOT
SERIES

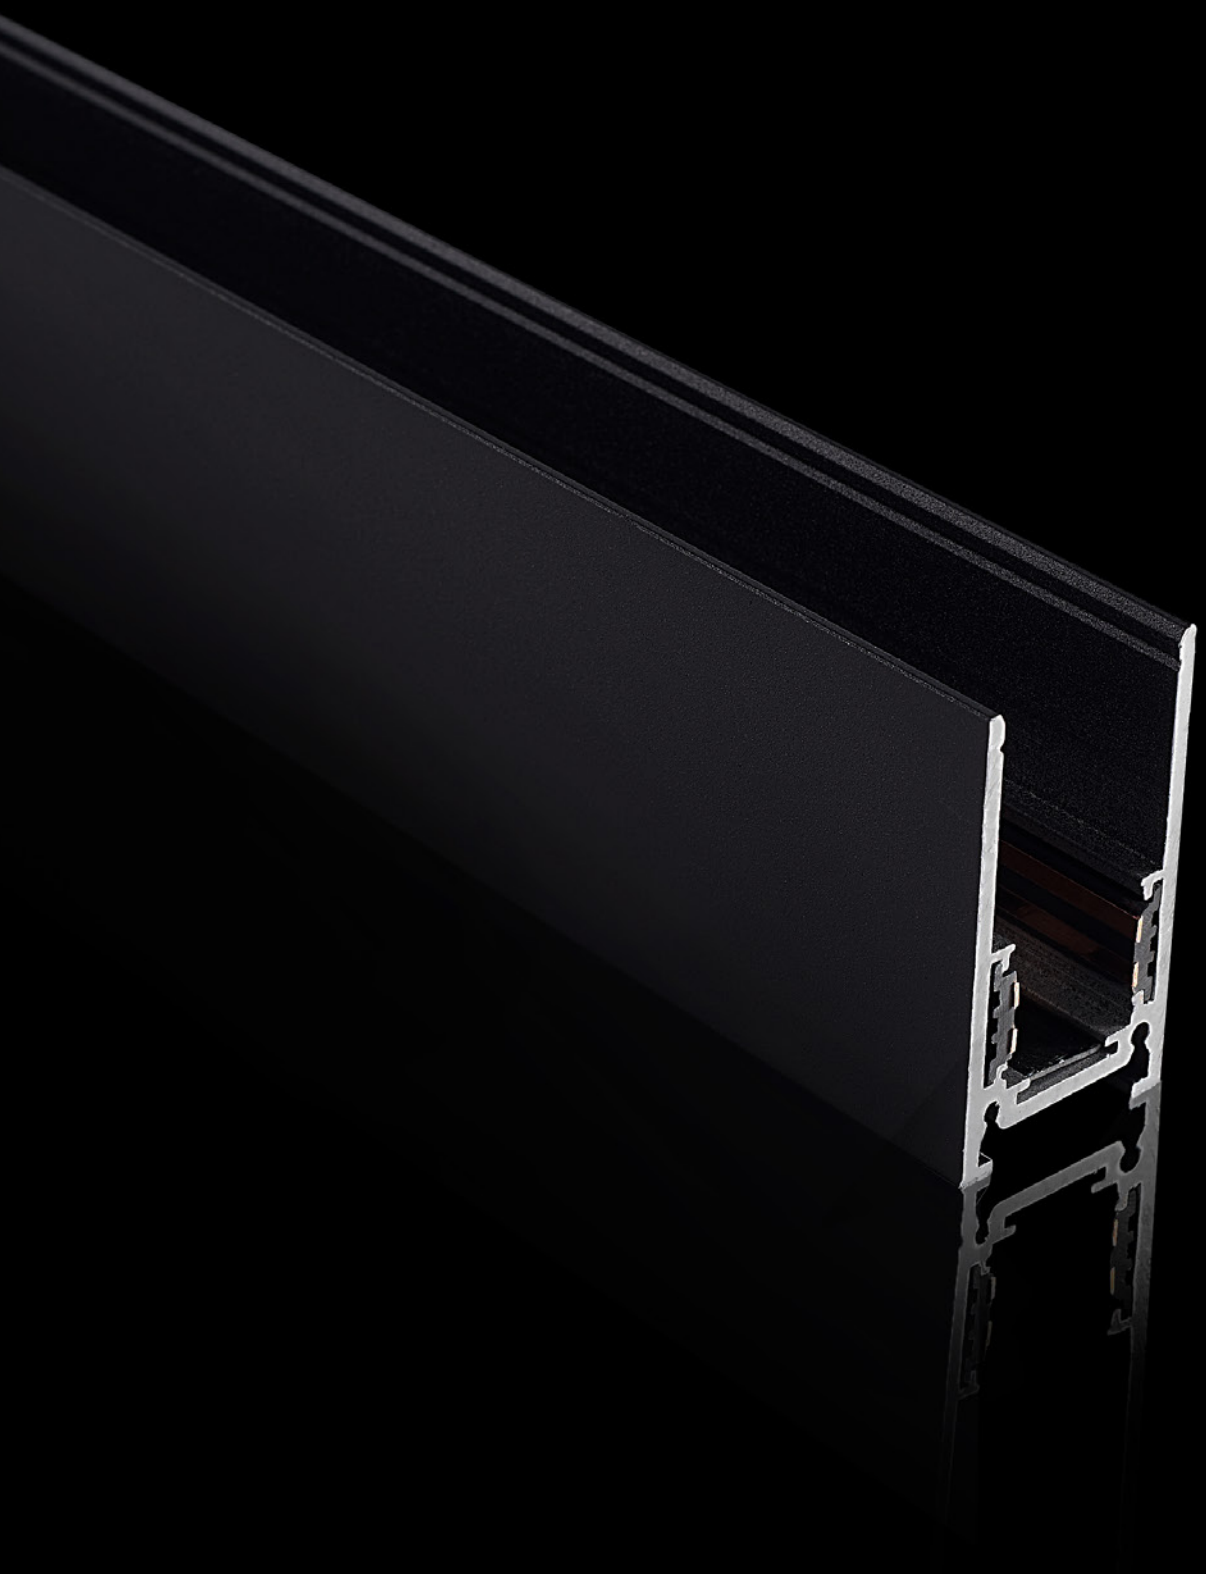


JW


MAGNET 48V SYSTEM

SERIES

GL-JW2521 明裝48V磁吸軌道



長度 length	1000mm / 2000mm / 3000mm(厚度2mm)
電壓 Voltage	DC48V (WITH DRIVER)
顏色 Colors	Black



GL-JW2521-1
End caps(pairs)

端蓋(一對)




GL-JW2521-4
Flexible electrical connector

轉角電器連接件



GL-JW2521-2
I type electrical connector

I型電器連接件




GL-JW2521-5
Suspension clip panel

吊裝卡扣版(一對)



GL-JW2521-3
Electrical input


電器輸入端



GL-JW2521-6
Screw fastener

螺絲固定件(一組)

GL-JWR035T LED磁吸式軌道射燈



功率 Watts	7W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	75lm/W
角度 Beam angle	15° / 24° / 38°
顯指 Color rendering index	≥90
電壓 Voltage	DC48V
顏色 Color	Black

Available

ON/OFF

0-10V

DALI

Dimmable

CCC

CE

CB

RoHS

REACH

90°

355°

IP 20


UGR<19

15°

24°

38°

GL-JWR045T LED磁吸式軌道射燈



功率 Watts	10W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	75lm/W
角度 Beam angle	15° / 24° / 38°
顯指 Color rendering index	≥90
電壓 Voltage	DC48V
顏色 Color	Black

Available

ON/OFF

0-10V

DALI

Dimmable

CCC

CE

CB

RoHS

REACH

90°

355°

IP 20


UGR<19

15°

24°

38°

GL-JWR055T LED磁吸式軌道射燈



功率 Watts	15W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	75lm/W
角度 Beam angle	15° / 24° / 38°
顯指 Color rendering index	≥90
電壓 Voltage	DC48V
顏色 Color	Black

Available

ON/OFF

0-10V

DALI

Dimmable

CCC

CE

CB

RoHS

REACH

90°

355°

IP 20


UGR<19

15°

24°

38°

GL-JWR065T LED磁吸式軌道射燈



功率 Watts	20W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	75lm/W
角度 Beam angle	15° / 24° / 38°
顯指 Color rendering index	≥90
電壓 Voltage	DC48V
顏色 Color	Black

Available

ON/OFF

0-10V

DALI

Dimmable

CCC

CE

CB

RoHS

REACH

90°

355°

IP 20


UGR<19

15°

24°

38°

GL-JWTJ40T LED磁吸式可調焦軌道射燈



功率 Watts	7W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	75lm/W
角度 Beam angle	15°~60°
顯指 Color rendering index	≥90
電壓 Voltage	DC48V
顏色 Color	Black

Available

ON/OFF

0-10V

DALI

Dimmable

CCC

CE

CB

RoHS

REACH

90°


355°

IP 20

UGR<19

15°-60°

GL-JWTJ50T LED磁吸式可調焦軌道射燈



功率 Watts	12W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	75lm/W
角度 Beam angle	15°~60°
顯指 Color rendering index	≥90
電壓 Voltage	DC48V
顏色 Color	Black

Available

ON/OFF

0-10V

DALI

Dimmable

CCC

CE

CB

RoHS

REACH

90°


355°

IP 20

UGR<19

15°-60°

GL-JWTJ62T LED磁吸式可調焦軌道射燈



功率 Watts	18W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	75lm/W
角度 Beam angle	15°~60°
顯指 Color rendering index	≥90
電壓 Voltage	DC48V
顏色 Color	Black

Available

ON/OFF

0-10V

DALI

Dimmable

CCC

CE

CB

RoHS

REACH

90°

355°

IP 20


UGR<19

15°-60°



GL-JWJ-20-6

LED磁吸式格柵燈



功率 Watts	6W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	75lm/W
角度 Beam angle	15° / 24° / 38°
顯指 Color rendering index	≥90
電壓 Voltage	DC48V
顏色 Color	Black

Available

ON/OFF

0-10V

DALI




Dimmable



GL-JWJ-20-12

LED磁吸式格柵燈



功率 Watts	12W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	75lm/W
角度 Beam angle	15° / 24° / 38°
顯指 Color rendering index	≥90
電壓 Voltage	DC48V
顏色 Color	Black

Available

ON/OFF

0-10V

DALI




Dimmable



GL-JWJ-20-18

LED磁吸式格柵燈



功率 Watts	18W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	75lm/W
角度 Beam angle	15° / 24° / 38°
顯指 Color rendering index	≥90
電壓 Voltage	DC48V
顏色 Color	Black

Available

ON/OFF

0-10V

DALI




Dimmable



GL-JWJ-20-24

LED磁吸式格柵燈



功率 Watts	24W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	75lm/W
角度 Beam angle	15° / 24° / 38°
顯指 Color rendering index	≥90
電壓 Voltage	DC48V
顏色 Color	Black

Available

ON/OFF

0-10V

DALI



Dimmable



Unconventional specifications, please consult the seller first


非常規規格產品請先與賣家溝通



JW EYES
SERIES

GL-JWT-20-6A

LED磁吸式折疊格柵燈



功率 Watts	6W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	75lm/W
角度 Beam angle	15° / 24° / 38°
顯指 Color rendering index	≥90
電壓 Voltage	DC48V
顏色 Color	Black

Available

ON/OFF
0-10V
DALI




Dimmable



GL-JWT-20-12A

LED磁吸式折疊格柵燈



功率 Watts	12W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	75lm/W
角度 Beam angle	15° / 24° / 38°
顯指 Color rendering index	≥90
電壓 Voltage	DC48V
顏色 Color	Black

Available

ON/OFF
0-10V
DALI




Dimmable



GL-JWT-20-18A

LED磁吸式折疊格柵燈



功率 Watts	18W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	75lm/W
角度 Beam angle	15° / 24° / 38°
顯指 Color rendering index	≥90
電壓 Voltage	DC48V
顏色 Color	Black

Available

ON/OFF
0-10V
DALI




Dimmable





JW EYES
SERIES


GL-JWJT-12 LED磁吸式可調180度格柵燈



功率 Watts	6W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	75lm/W
角度 Beam angle	15° / 24° / 38°
顯指 Color rendering index	≥90
電壓 Voltage	DC48V
顏色 Color	Black

Available	Dimmable	CCC	CE	CB	RoHS	IP20	UGR<19
ON/OFF							
0-10V							
DALI							


GL-JWJT-22 LED磁吸式可調180度格柵燈



功率 Watts	12W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	75lm/W
角度 Beam angle	15° / 24° / 38°
顯指 Color rendering index	≥90
電壓 Voltage	DC48V
顏色 Color	Black

Available	Dimmable	CCC	CE	CB	RoHS	IP20	UGR<19
ON/OFF							
0-10V							
DALI							


GL-JWJT-32 LED磁吸式可調180度格柵燈



功率 Watts	18W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	75lm/W
角度 Beam angle	15° / 24° / 38°
顯指 Color rendering index	≥90
電壓 Voltage	DC48V
顏色 Color	Black

Available	Dimmable	CCC	CE	CB	RoHS	IP20	UGR<19
ON/OFF							
0-10V							
DALI							

GL-JWL-20-300 LED磁吸式下照線性燈

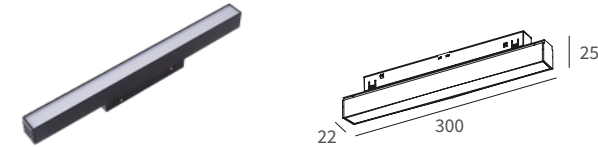

功率 Watts	10W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	75lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC48V
顏色 Color	Black

Available


ON/OFF
0-10V
DALI



Dimmable



GL-JWL-20-600 LED磁吸式下照線性燈

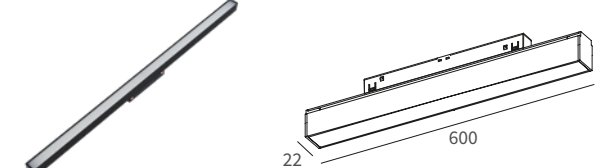

功率 Watts	20W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	75lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC48V
顏色 Color	Black

Available


ON/OFF
0-10V
DALI



Dimmable



GL-JWL-20-900 LED磁吸式下照線性燈

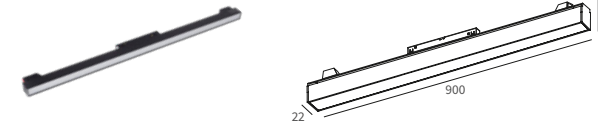

功率 Watts	30W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	75lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC48V
顏色 Color	Black

Available

ON/OFF
0-10V
DALI



Dimmable



LU

MAGNETIC TRACK
SERIES




GL-LTA165

平面式磁吸軌道

-W:白色 -B:黑色 -S:銀色



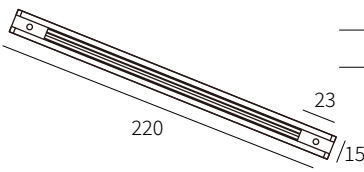

長度 length	2500mm (MAX)
電壓 Voltage	DC12V / DC24V (WITH DRIVER)
顏色 Colors	White / Black / Silver

IP20

Suspension Wire Accessories 導線配件

GL-LUB238



track connector
軌道連接器

GL-LUB1068




power connector
電源連接器

GL-LTB140

圓柱式磁吸軌道

-W:白色 -B:黑色 -S:銀色





螺絲台面固定

開孔螺帽固定

長度 length	2500mm (MAX)
電壓 Voltage	DC12V / DC24V (WITH DRIVER)
顏色 Colors	White / Black / Silver

IP20

Suspension Wire Accessories 導線配件

GL-LUB238



track connector
軌道連接器

GL-LUB1068




power connector
電源連接器

GL-LTC120-6

LED透明磁吸導線





電流 Electric current	1A
電壓 Voltage	DC12V / DC24V
長度 Length	120cm (厚度0.1mm)

IP20

Transparent Suspension Wire Accessories 透明導線配件

GL-PET43016



oval base
橢圓盤底座

GL-PET3610




power connector
電源連接器

GL-LUB7517-P-2W

LED磁吸式小射燈

-W:白色 -B:黑色 -S:銀色





功率 Watts	2W
色溫 Color temperature	3000K / 4000K / 6000K
光效 Light efficiency	210lm/W
角度 Beam angle	8° / 25° / 45° / 80°
顯指 Color rendering index	≥90
電壓 Voltage	DC12V / DC24V
顏色 Color	Black / Silver / Gold

Available ON/OFF ☐ Dimmable ☐


90° 355° IP20

GL-LUB7520-P-1W

LED磁吸式小射燈

-W:白色 -B:黑色 -S:銀色





功率 Watts	1W
色溫 Color temperature	3000K / 4000K / 6000K
光效 Light efficiency	150lm/W
角度 Beam angle	8° / 25° / 45° / 80°
顯指 Color rendering index	≥90
電壓 Voltage	DC12V / DC24V
顏色 Color	White / Black / Silver / Gold

Available ON/OFF ☐ Dimmable ☐


90° 355° IP20

GL-LUB7523-P-3W

LED磁吸式可調焦小射燈

-W:白色 -B:黑色 -S:銀色





功率 Watts	3W
色溫 Color temperature	3000K / 4000K / 6000K
光效 Light efficiency	210lm/W
角度 Beam angle	10° - 60° (adjustable)
顯指 Color rendering index	≥90
電壓 Voltage	DC12V / DC24V
顏色 Color	Black / Silver

Available ON/OFF ☐ Dimmable ☐


90° 355° IP20 UGR<19

GL-LUB7527-P-3W

LED磁吸式小射燈

-W:白色 -B:黑色 -S:銀色





功率 Watts	3W
色溫 Color temperature	3000K / 4000K / 6000K
光效 Light efficiency	300lm/W
角度 Beam angle	15° / 30° / 60°
顯指 Color rendering index	≥90
電壓 Voltage	DC12V / DC24V
顏色 Color	White / Black / Silver / Gold

Available ON/OFF ☐ Dimmable ☐



90° 355° IP20

LU SURFACE SOPTLIGHT
SERIES



GL-LUB7517-3-2W LED明裝小射燈

-W:白色 -B:黑色 -S:銀色





功率 Watts	1*2W
色溫 Color temperature	3000K / 4000K / 6000K
光效 Light efficiency	210lm/W
角度 Beam angle	8° / 25° / 45° / 80°
顯指 Color rendering index	≥90
電壓 Voltage	DC 12V
顏色 Color	White / Black / Silver

Available ON/OFF Dimmable        

GL-LUB7520-3-1W LED明裝小射燈

-W:白色 -B:黑色 -S:銀色




功率 Watts	1*1W
色溫 Color temperature	3000K / 4000K / 6000K
光效 Light efficiency	150lm/W
角度 Beam angle	8° / 25° / 45° / 80°
顯指 Color rendering index	≥90
電壓 Voltage	DC 12V
顏色 Color	White / Black / Silver

Available ON/OFF Dimmable        

GL-LUB7523-3-3W LED明裝小射燈

-W:白色 -B:黑色 -S:銀色






功率 Watts	1*3W
色溫 Color temperature	3000K / 4000K / 6000K
光效 Light efficiency	210lm/W
角度 Beam angle	10° - 60°(Adjustable)
顯指 Color rendering index	≥90
電壓 Voltage	DC 12V
顏色 Color	Black / Silver

Available ON/OFF Dimmable        

GL-LUB7527-3-3W LED明裝小射燈

-W:白色 -B:黑色 -S:銀色



功率 Watts	4*0.8W
色溫 Color temperature	3000K / 4000K / 6000K
光效 Light efficiency	300lm/W
角度 Beam angle	15° / 30° / 60°
顯指 Color rendering index	≥90
電壓 Voltage	DC 12V
顏色 Color	White / Black / Silver

Available ON/OFF Dimmable        

Unconventional specifications, please consult the seller first
非常規規格產品請先與賣家溝通



SKYLINE SERIES

"Every atmosphere, every place, becomes a piece of art"

Using the extraordinary light of the skyline to paint. It is a continuous band of indirect light that cuts through space like a shining blade. The skyline is a very thin band, only 20mm wide, made by stainless steel.

You can adapt it to any space, place it anywhere you want, extend it from wall to wall, or extend it from ceiling to floor.

"每一個氛圍，每一個地方，都成為一件藝術品"，用天際線的非凡光芒作畫。它是一條連續的間接光帶，像閃亮的刀片一樣穿過空間。


天際線是一條非常細的帶子，只有 20 毫米寬，由不銹鋼製成。

您可以將其適應任何空間，將其放置在您想要的任何位置，將其從牆壁延伸到牆壁，或將其從天花板延伸到地板。

GL-SKYLINE

LED 2.0天際線

-W:白色 -B:黑色



120°

90

功率 Watts	11W/1.5M/2M 14.4W/0.5M/1M
色溫 Color temperature	3000K / 3500K / 4000K / 5000K / 2700K-6000K / RGB(W:OPTION)
光效 Light efficiency	80lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	White / Black

Available

ON/OFF

TRIAC

0-10V

DALI

PLC

Dimmable


CCC

CE


CB

IP 20


DIMENSION

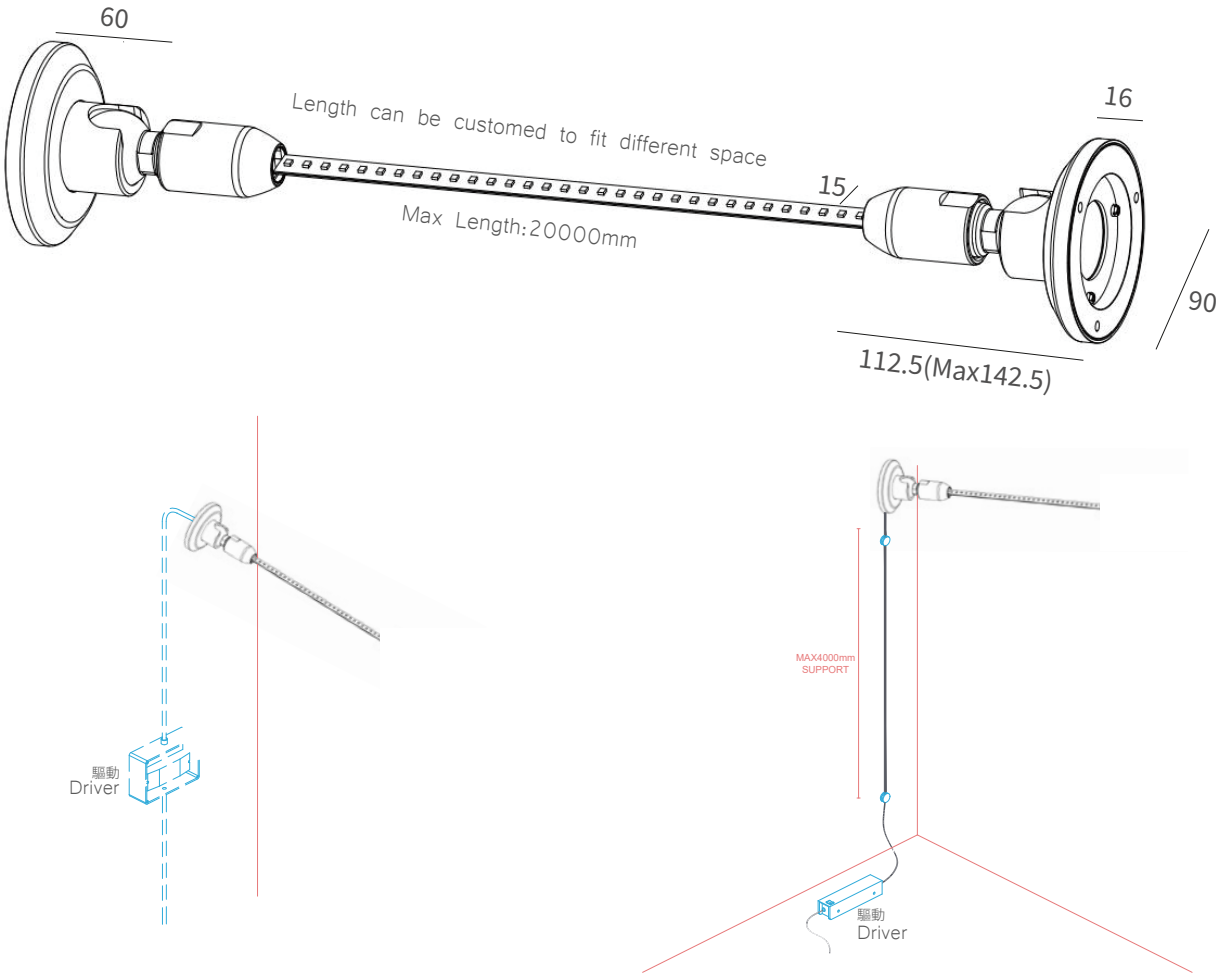





LIGHTING GUIDE

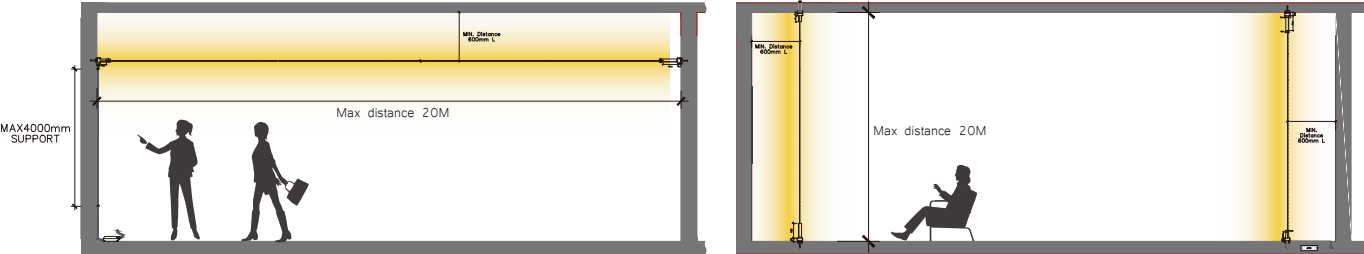

INSTALLATION MODE

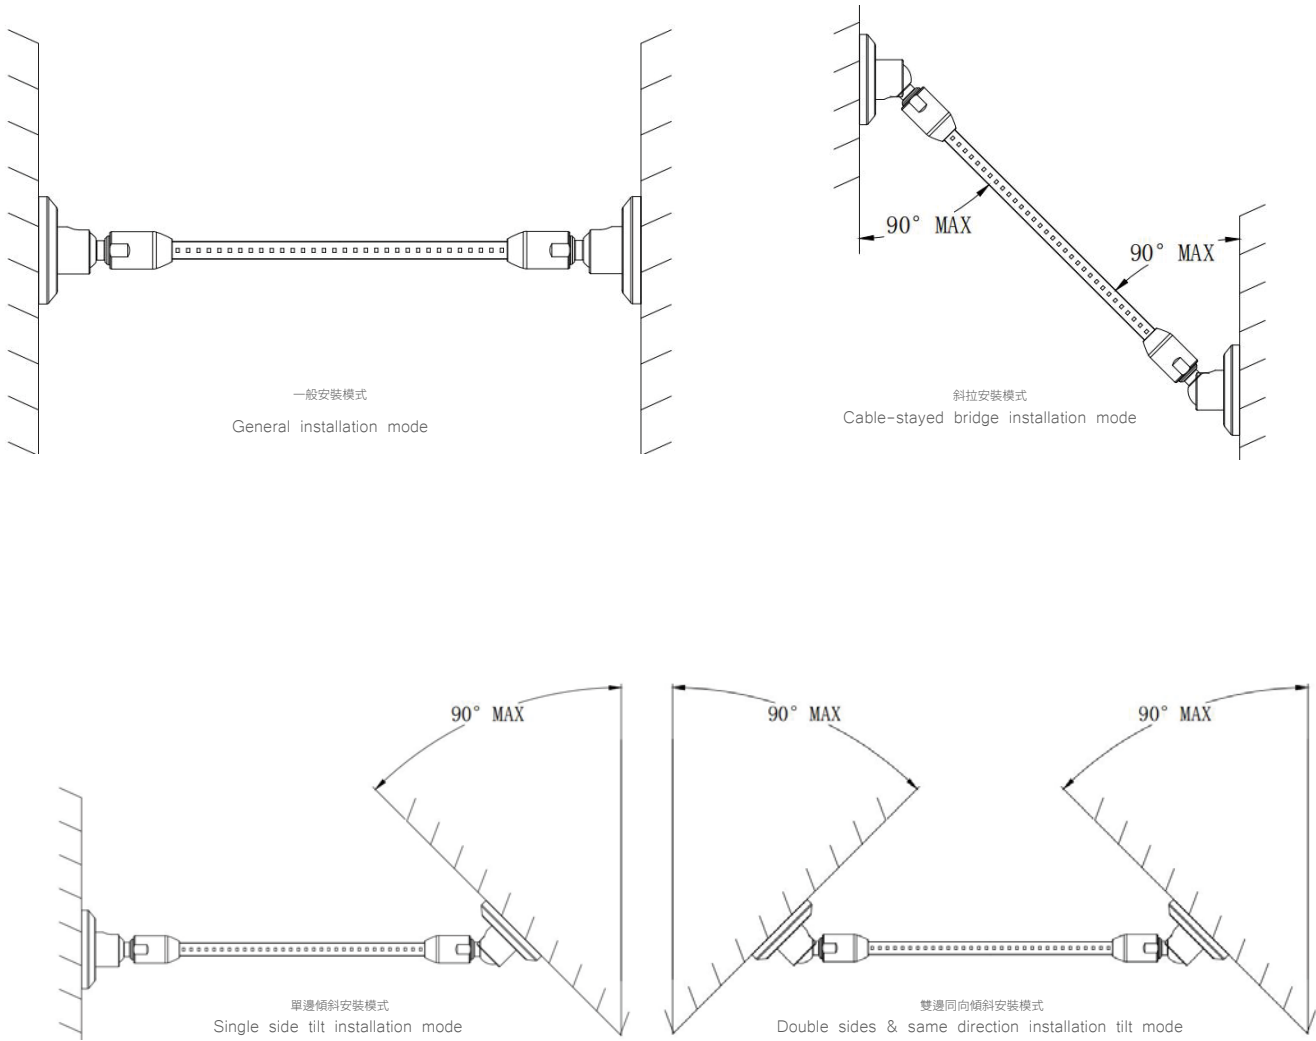


Unconventional specifications, please consult the seller first
非常規規格產品請先與賣家溝通

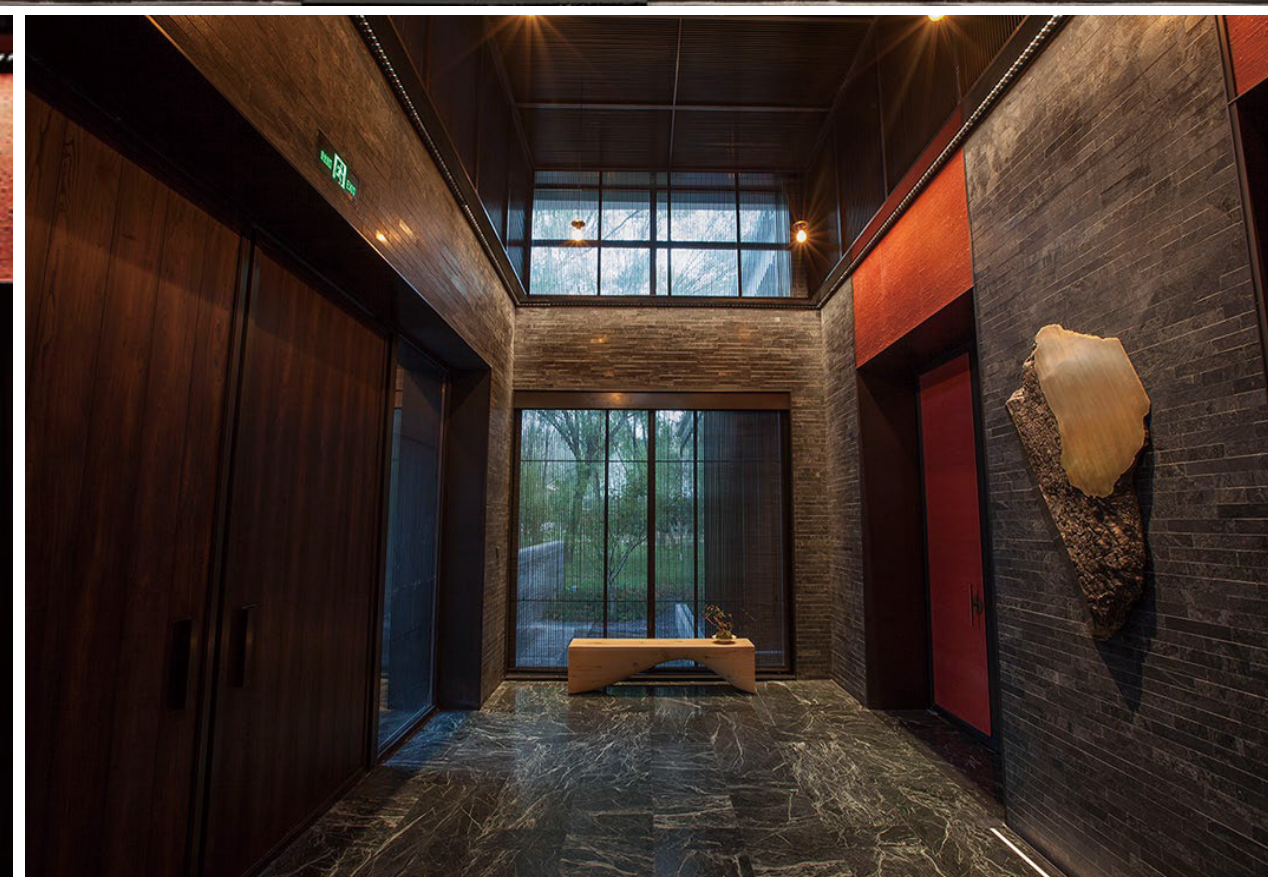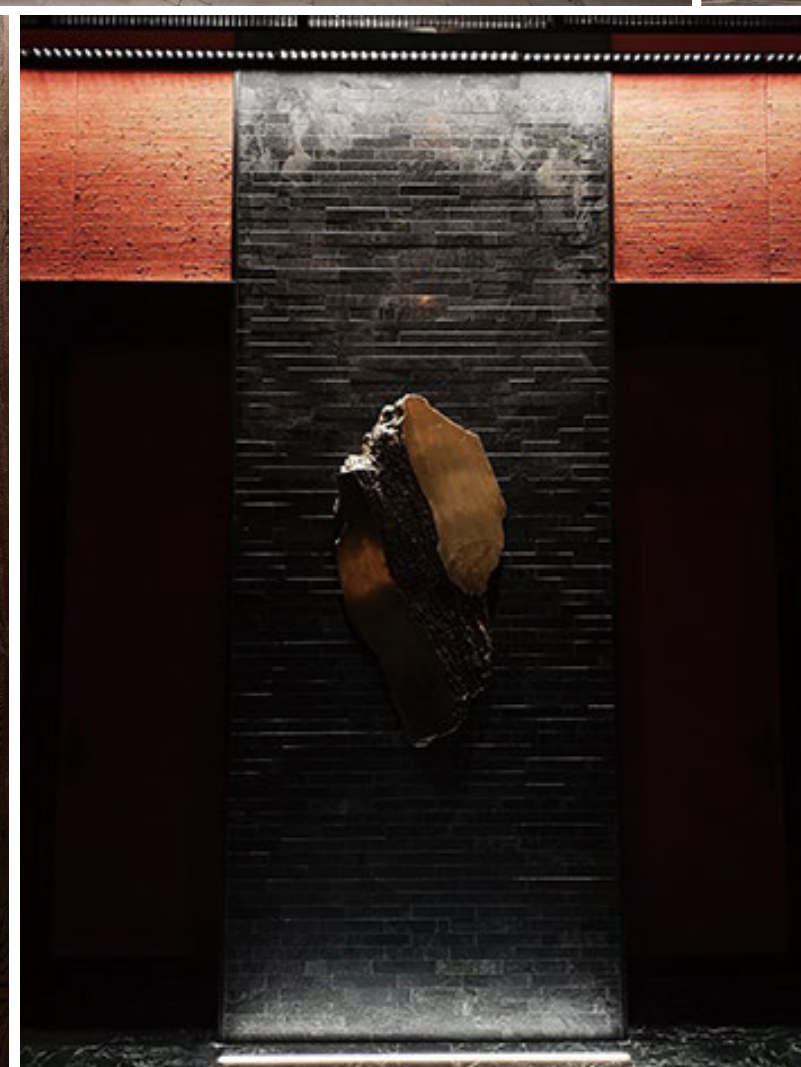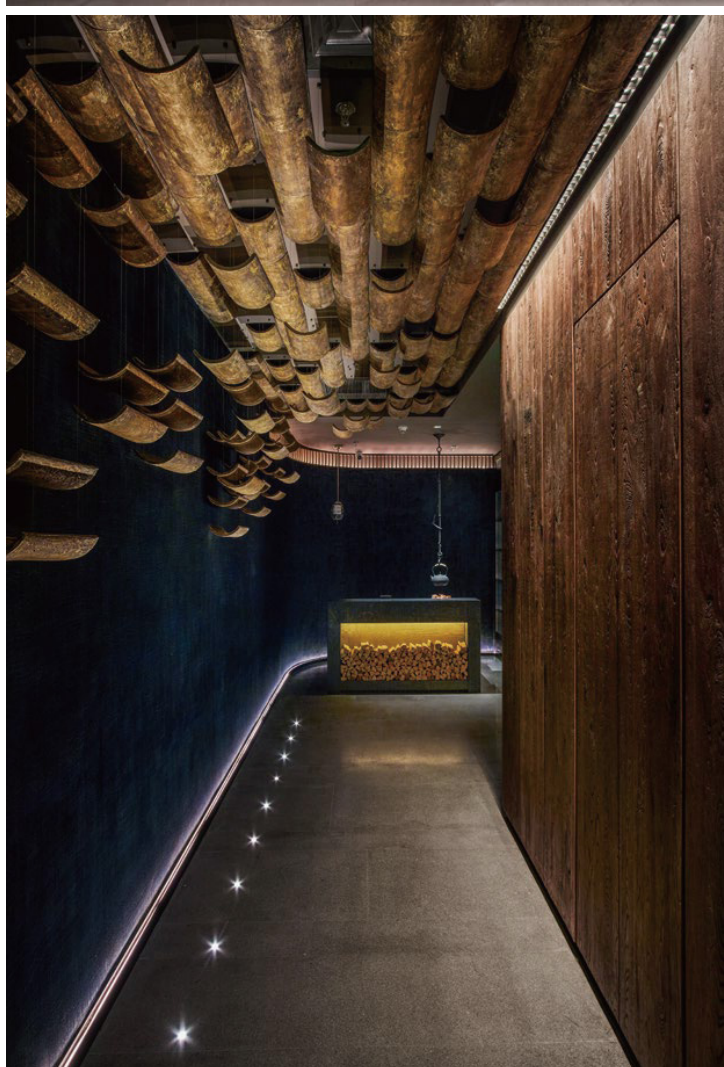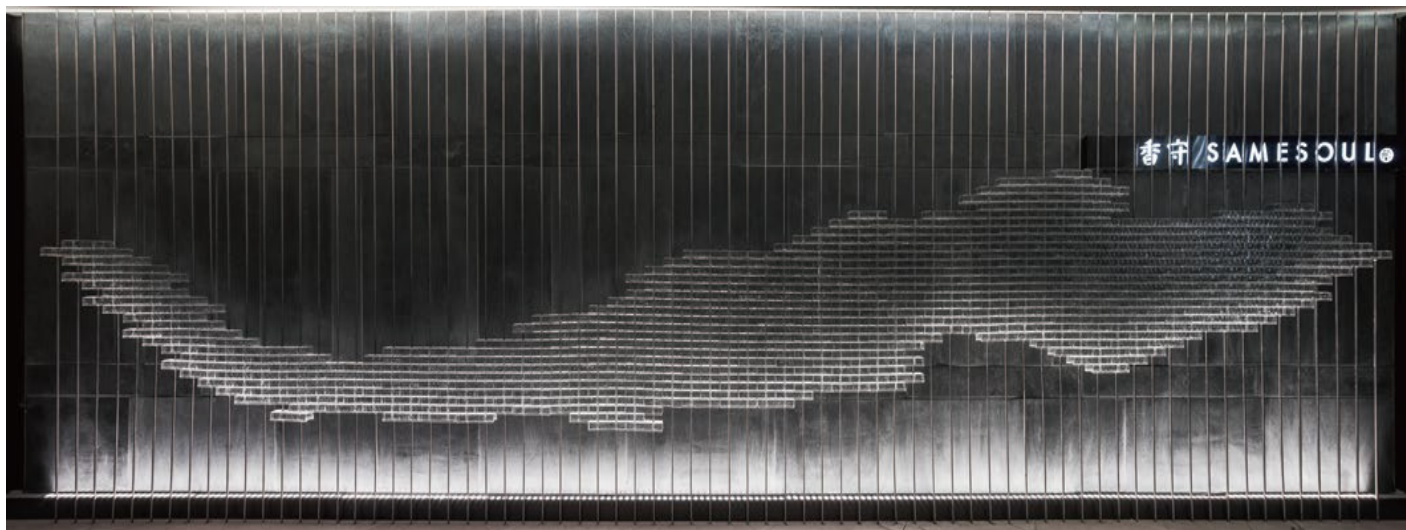


OUT DOOR WALLWASHER
SERIES

GL-SXH025WP LED平面洗牆燈-IP65

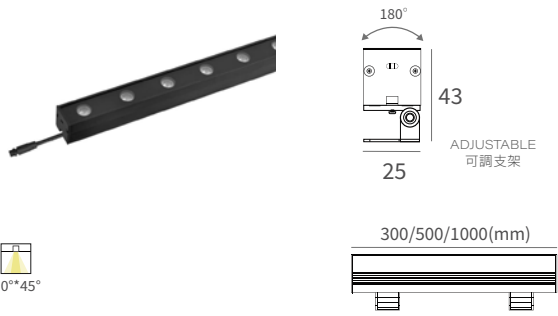


功率 Watts	6W/0.3M 12W/0.5M 24W/1M
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	70lm/W
角度 Beam angle	25°*45°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	White / Black
Available	☐ Dimmable
ON/OFF	
TRIAC (external drive)	
0-10V (external drive)	
DALI (external drive)	
PLC (external drive)	
Accessories 配件	POWER CABLE 電源線

GL-SXH025WL LED格柵洗牆燈-IP65

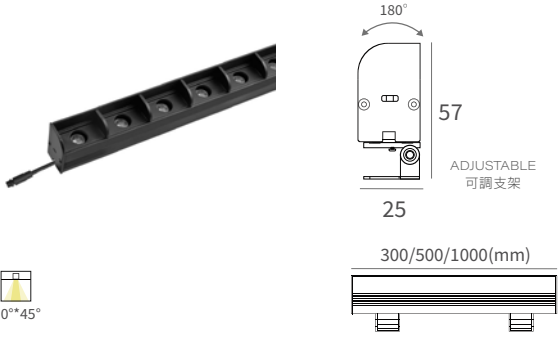


功率 Watts	7W/0.3M 12W/0.5M 24W/1M
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	75lm/W
角度 Beam angle	25°*45°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	White / Black
Available	☐ Dimmable
ON/OFF	
TRIAC (external drive)	
0-10V (external drive)	
DALI (external drive)	
PLC (external drive)	
Accessories 配件	POWER CABLE 電源線

GL-SXH025WL LED格柵洗牆燈-IP65

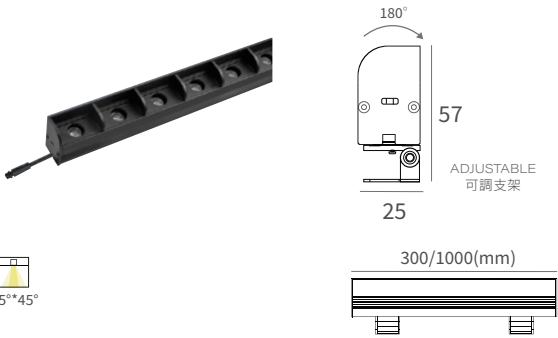

功率 Watts	9W/0.3M 24W+24W/1M
色溫 Color temperature	2700K-6000K
光效 Light efficiency	75lm/W
角度 Beam angle	25° x 45°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	Black
Available	☐ Tunable white
ON/OFF	
TRIAC (external drive)	
0-10V (external drive)	
DALI (external drive)	
PLC (external drive)	
Accessories 配件	POWER CABLE 電源線

GL-ZD2527 LED柔性硅膠洗牆燈

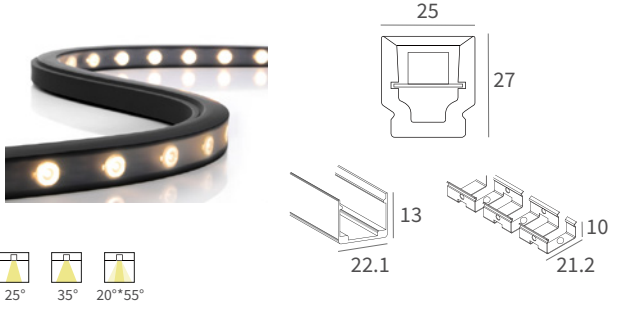

功率 Watts	24W/M
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	80lm/W
角度 Beam angle	25° / 35° / 20°*55°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	Black
Available	☐ Dimmable
ON/OFF	
TRIAC	
0-10V	
DALI	
PLC	
Accessories 配件	





Catalogue Vol. 25

中國總部 / 浙江省嘉興市嘉善縣台升大道3號資訊科技城B區21幢
Building 21, Zone B, Information Technology City, No. 3 Taisheng Avenue,
Jiashan County, Zhejiang Province

台灣旗艦店 / 台北市中山區松江路435號
No. 435, Songjiang Rd., Zhongshan Dist., Taipei City 104055, Taiwan (R.O.C.)

台灣總部 / 台中市南屯區大墩四街325號
No. 325, Dadun 4th St., Nantun Dist., Taichung City 408028, Taiwan (R.O.C.)