

Great Lighting

大 燐 照 明

ABOUT US

關於大燁照明

Jiashan Greatlighting Co. Ltd. is located in Jiashan National Economic Development area, was founded in 2008. it is a company integrating production, research and development, trade, and service as one professional lighting company.

After more than ten years of development, Greatlighting has established a branch in Taiwan in 2020.

Since the development of the company for over 10 years, we have established with internationally renowned designer and have completed the projects of Google in Shanghai, Lego in in Shanghai, Abbott in Shanghai, NIKE Flagship Store in Shanghai, LinkedIn in Shanghai, Steelcase in Shanghai, Alibaba in Hangzhou, Alibaba in Guangzhou etc.,

To keep pace with the times, forward thinking and innovation is the power. We think lighting not just only light, we believe it cover we life , happiness, quality. like the sun that warm us when winter is coming, like the moon that guide us home when night is coming, trust light will make us have a better life, development excellent light quality and high quality service are Greatlighting first priority.

嘉善大燁照明有限公司位於嘉善國家級經濟開發區，成立於2008年，是一家集生產、研發、貿易、服務於一體的專業照明公司。

經過十餘年的發展，大燁照明在2020年台灣設立了分公司。

在深耕十餘年下來的同時，我們與國際知名設計師緊密合作配合，並且完成了許多知名項目，如上海谷歌、上海樂高、上海亞培、上海首家NIKE旗艦店、上海領英、上海Steelcase、杭州阿里巴巴、廣州阿里巴巴....等等。

與時俱進，前瞻創新是動力，我們認為照明不僅僅是光，我們相信它涵蓋了我們的生活、幸福、品質。就像冬天來了溫暖我們的太陽，就像夜幕降臨時引導我們回家的月亮。相信光會讓我們擁有更美好的生活，發展優良的光品質和優質的服務是大燁照明的首要任務。

WE HAD COOPERATE WITH



TO BE CONTINUED

ABOUT QUALITY 關於品質

Quality is the life of an enterprise, and the company has a complete Good quality anagement system, set quality inspection standards accurate, customized strict shipping standards and improved quality control documents (such as forms, procedures, specifications, etc.)

So that all products have standards. The quality is all carried out according to the standards, so that the quality can be followed by a book, and the quality is carried out according to the book, so as to be a comprehensive system. The guarantee of quality allows our products to have a broader market, satisfying customers and achieving long-term successful cooperation.

品質作為企業的生命，公司擁有了完善品質管理系統，設定了品質檢驗標準，定制了嚴格的出貨標準，完善了品控文件（如表格，流程，規範等等）。

讓所有產品都有標準品質，全部以標準進行，讓品質有冊可依，依冊而行，從而全面系統。品質的保證讓我們的产品市場更廣闊，讓顧客滿意而達到長期成功的合作。



Automatic solder paste printing machine




4 Four machines: YAMAHA from Japan the most sophisticated SMT machine in the world



Reflow soldering



Automatic PCB welding machine



Automatic wire welding machine



40 Aging lines



Reel machine



Package lines



Microscope
Observe the LED sources are intact




Constant temperature and humidity chamber (-20°C ~ 50°C)
Test fixtures performance in harsh environment



LED electric oven
Remove the moisture from the LED sources, to keep the good stability of the LEDs, otherwise, with the moisture inside the LED, the LED easy to broke during usage




Vibration test table
Vibrate the finished products, for testing the stability of the products




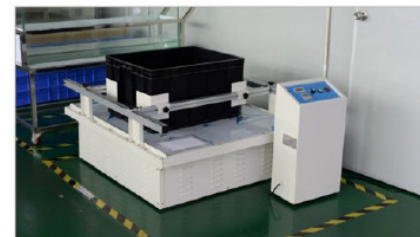


Transportation vibration testing machine
Test the reliability of package




Other detection devices

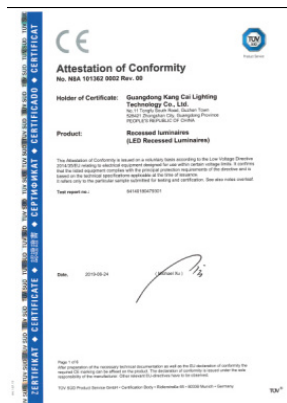

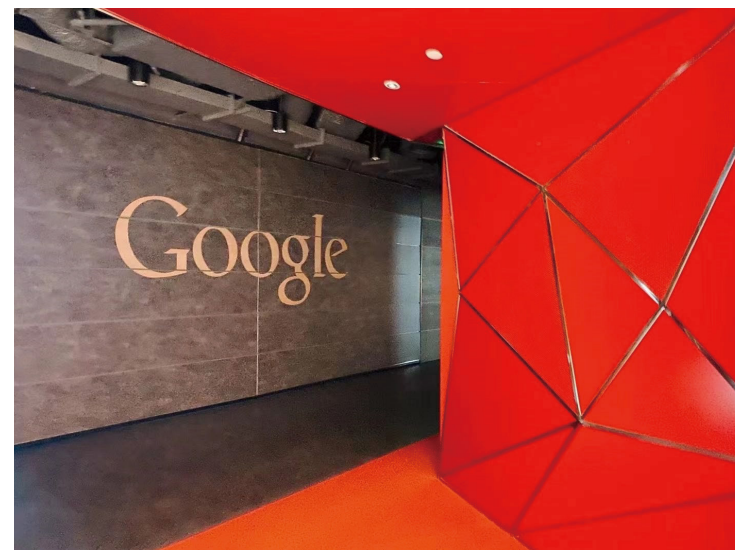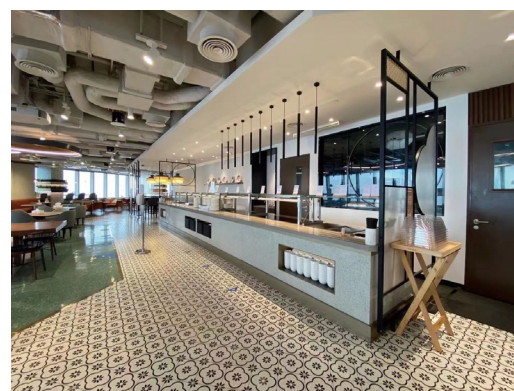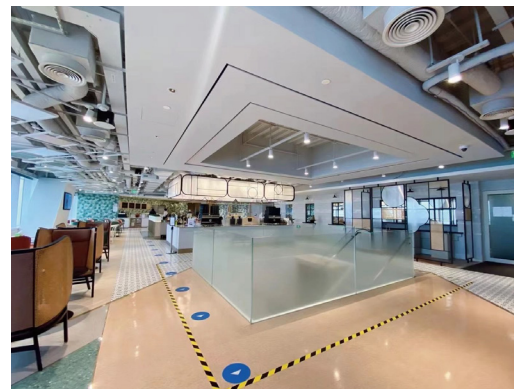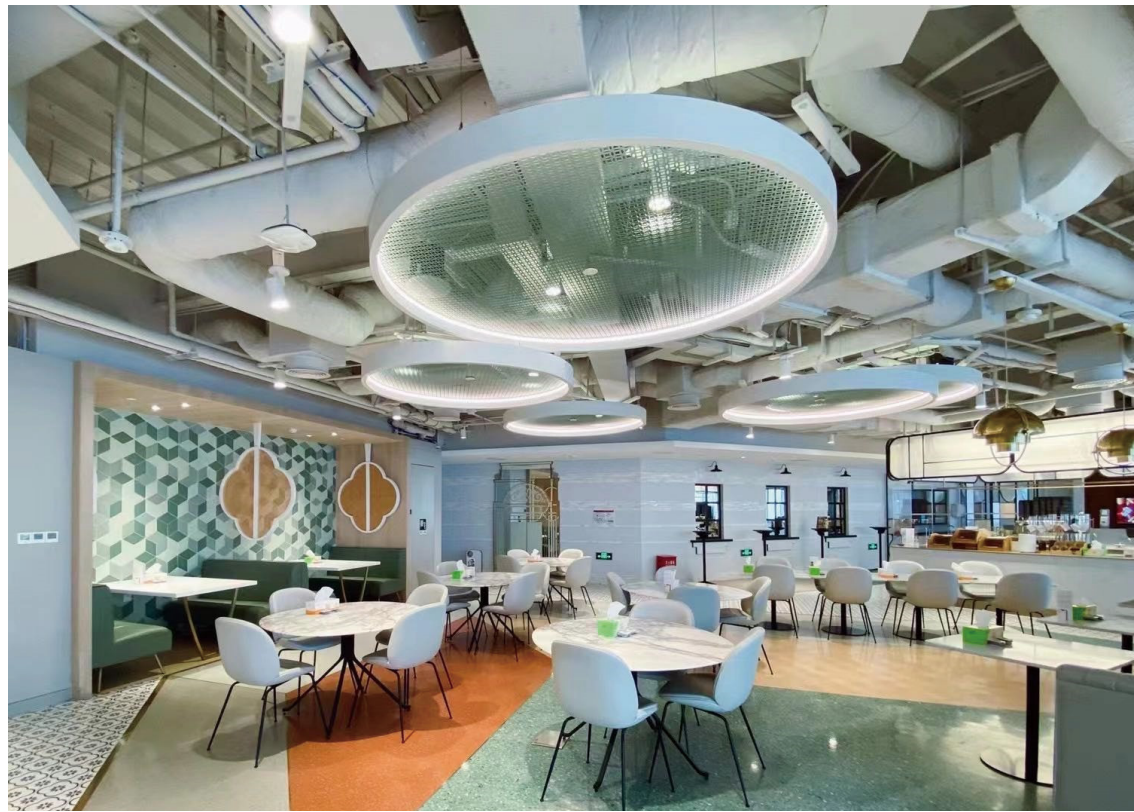

Shanghai
Google Office SH 谷歌上海办公室
 Robarts spaces & Studio illumine



THE MICHELIN GUIDE: 3 MICHELIN Star Restaurant

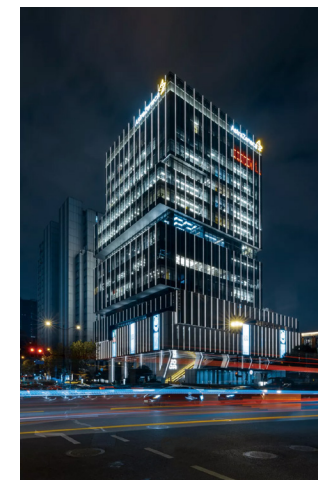

UCCA Edge Shanghai

NEWWAVE by DA VITTORIO


Linehouse & Studio illumine

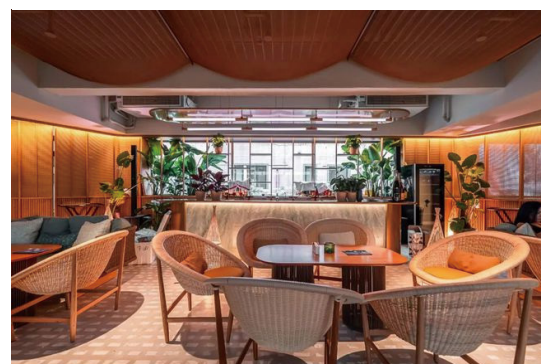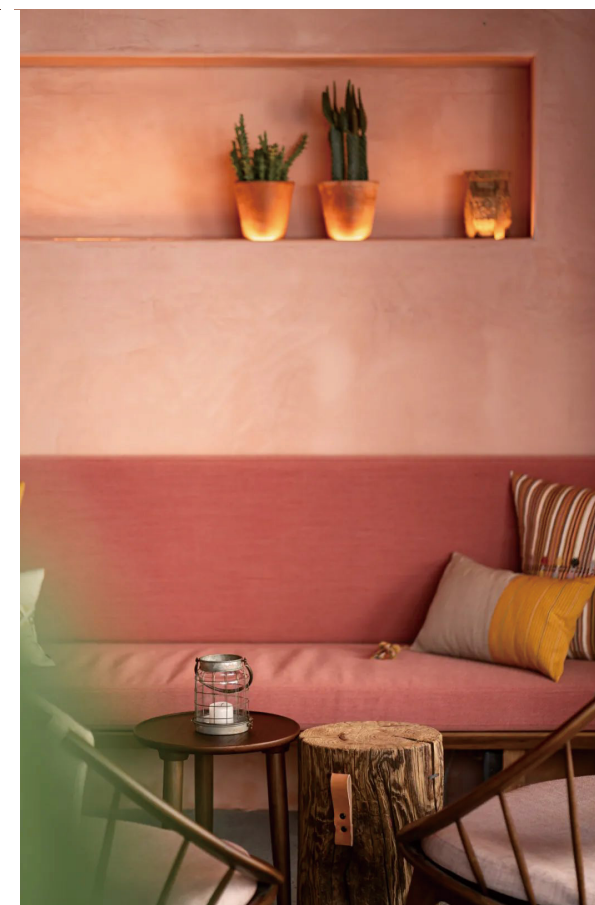

AUNN Shanghai

Bonica & La Barra & Mezcaleria & Tacos El Paisa





Armada Group

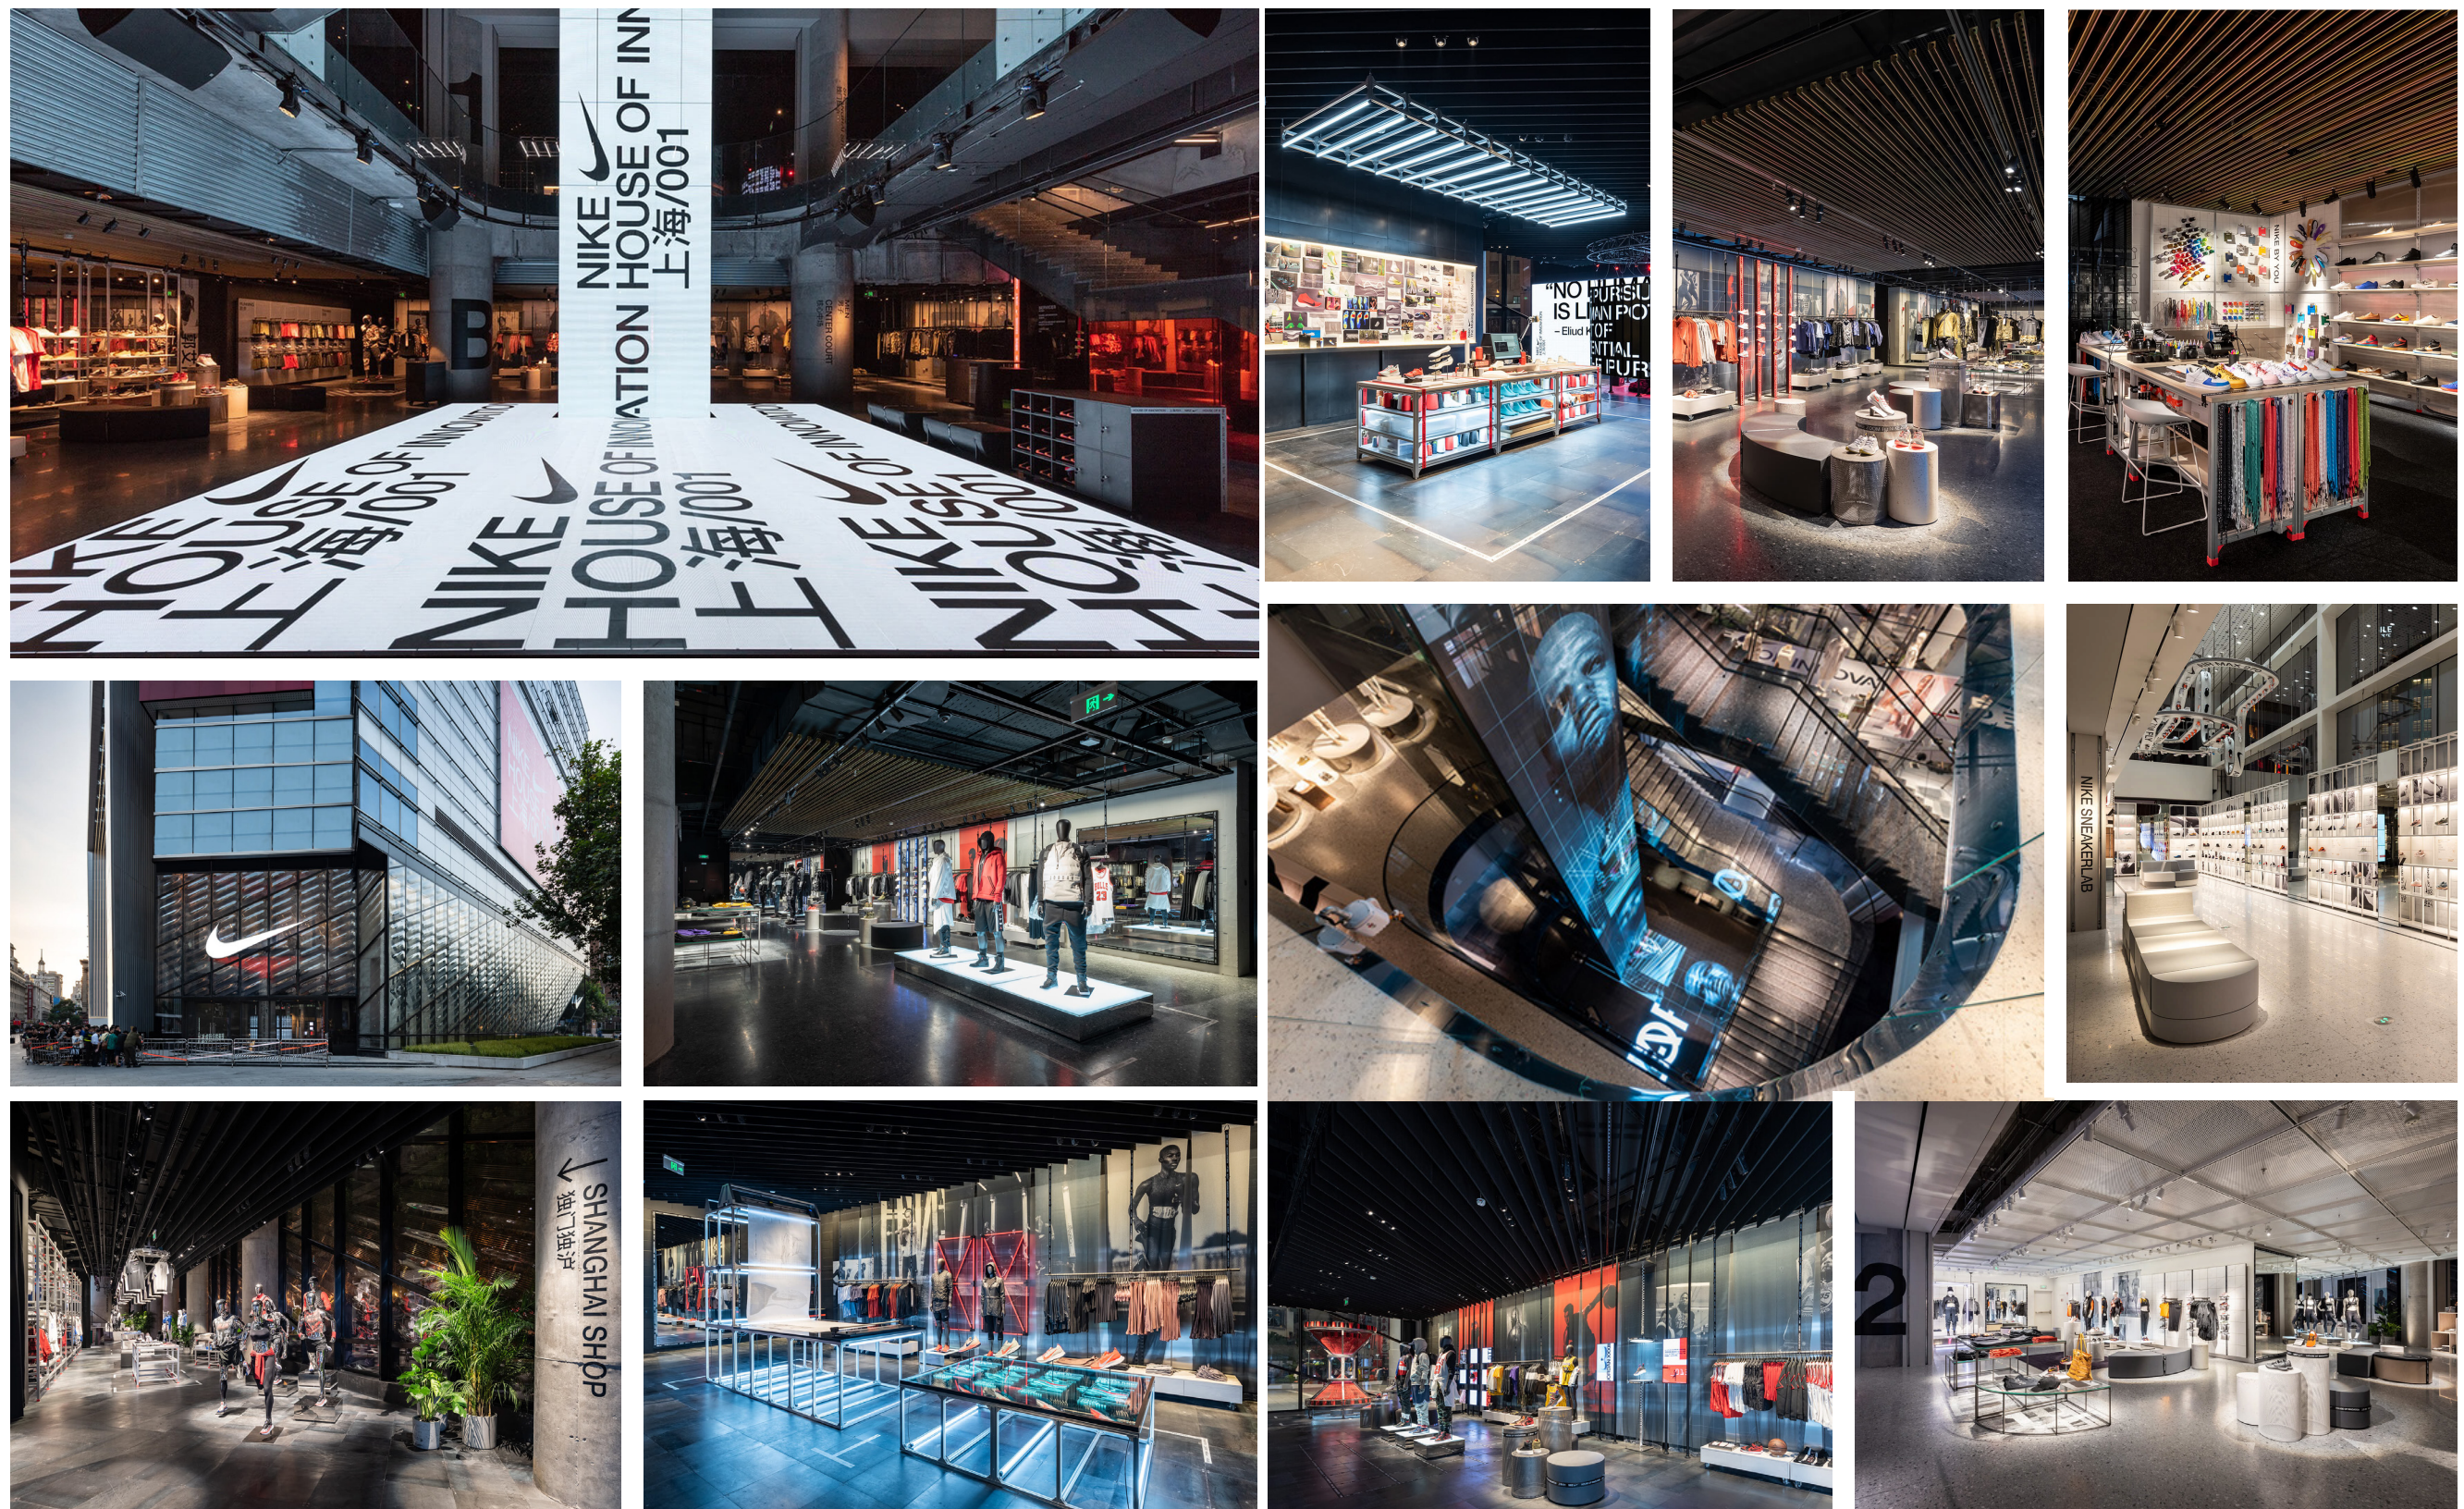

Shanghai
Nike House of Innovation NIKE上海001
 Nike Retail Group, CallisonRTKL & Studio illumine



Beijing
WAB Academy 北京京西學院
 anySCALE & Studio illumine

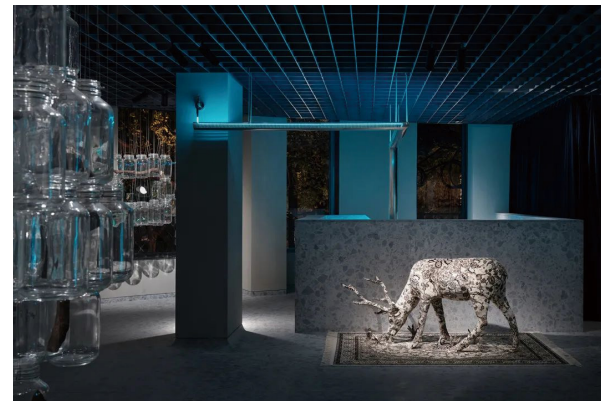
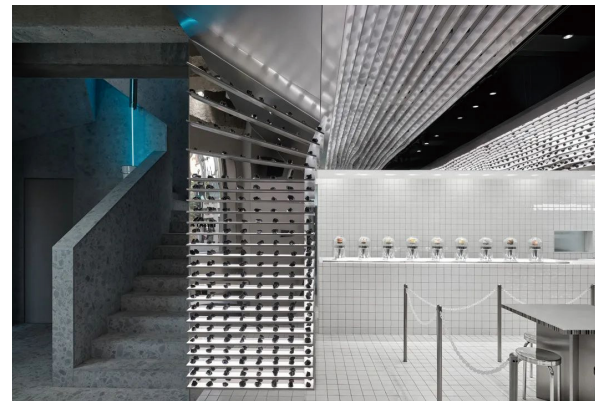
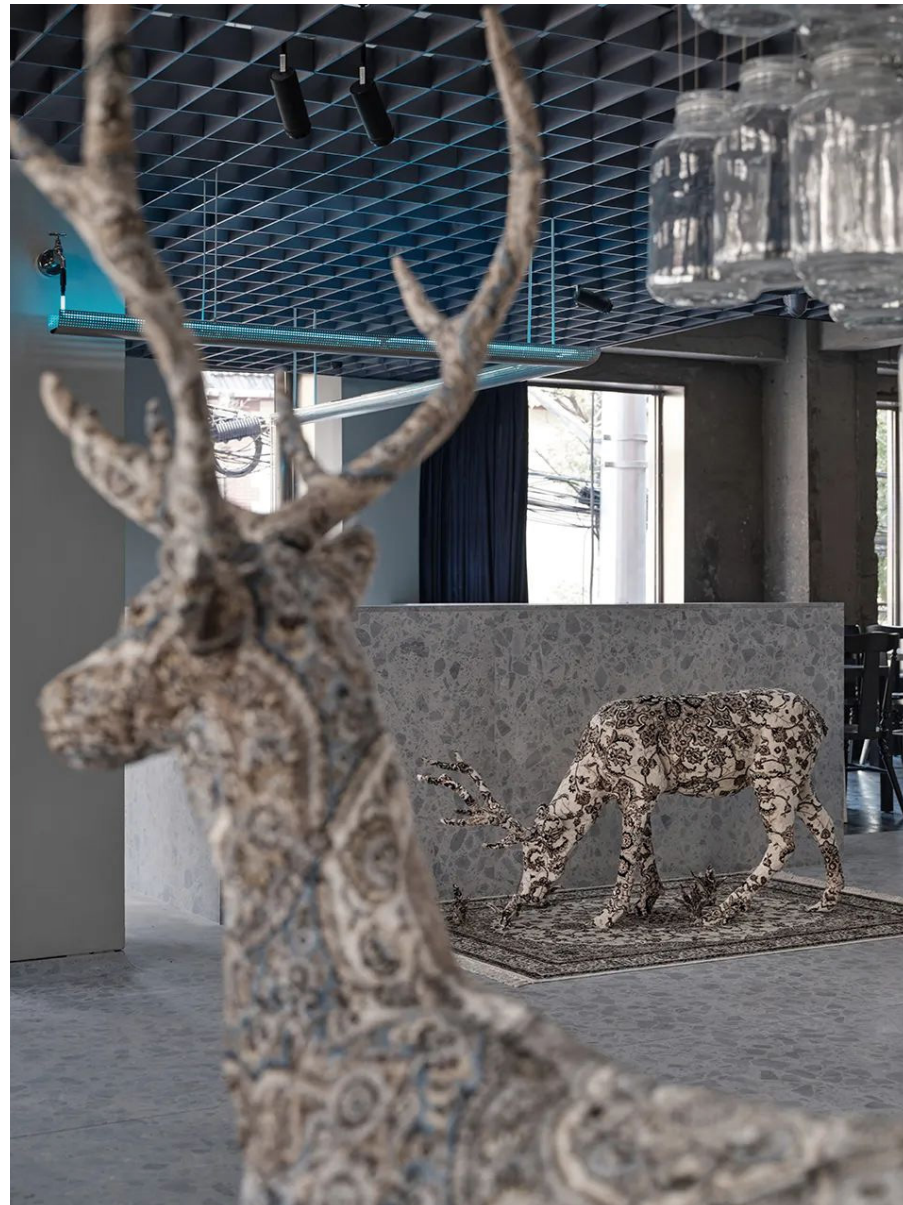
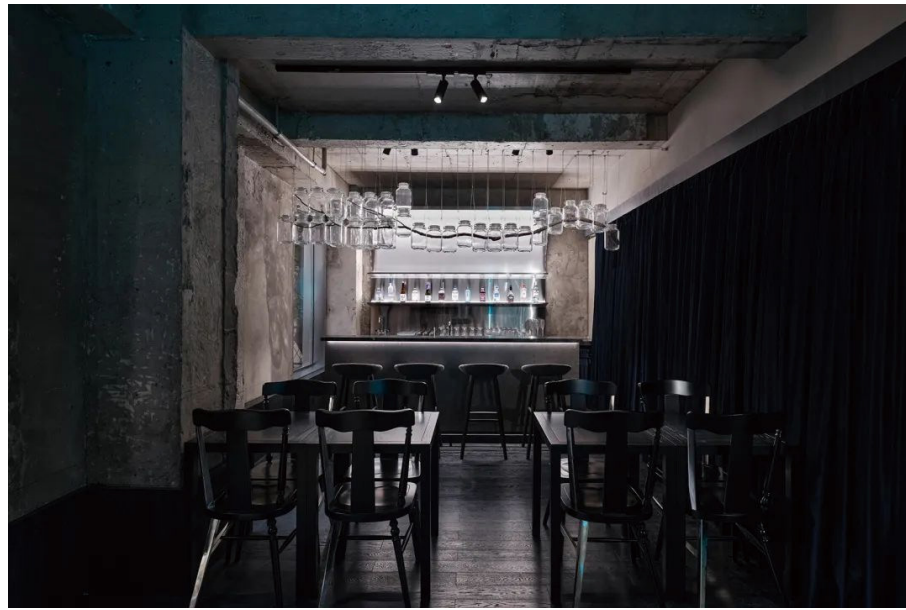


Shanghai
Black Star Pastry
 Linehouse & Studio illumine







THE MICHELIN GUIDE: 3 MICHELIN Star Restaurant





Shanghai
ROODOODOO by Paul Pairet 滬嘟嘟
Hcreates interiors & design

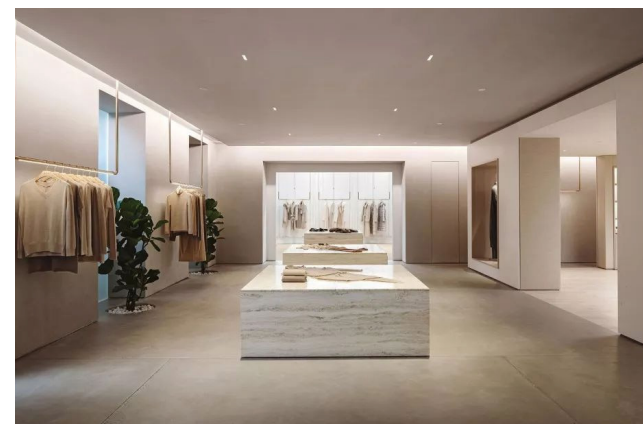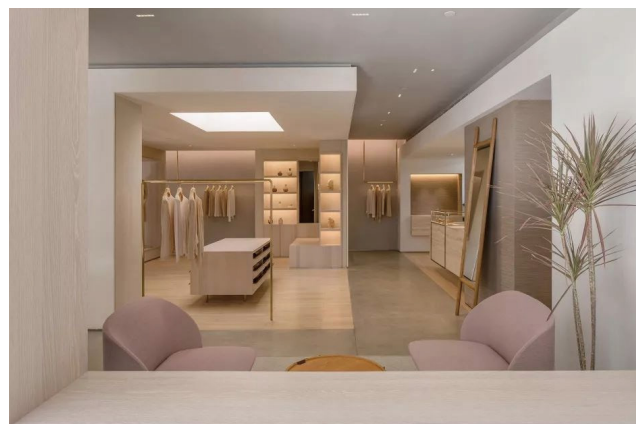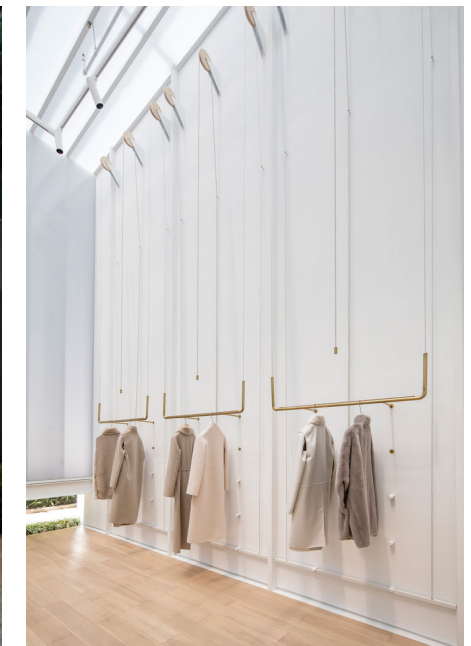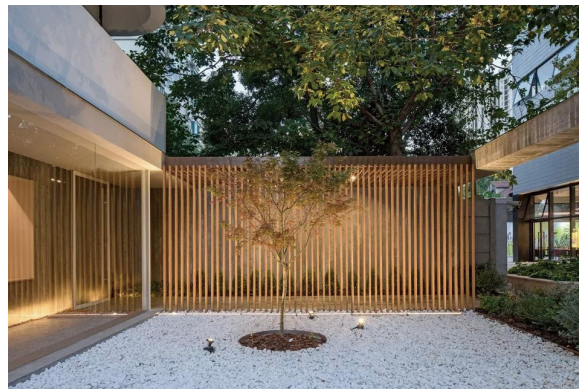




Shanghai
EMME
 LUKSTUDIO 芝作室

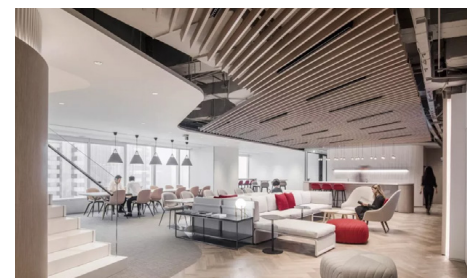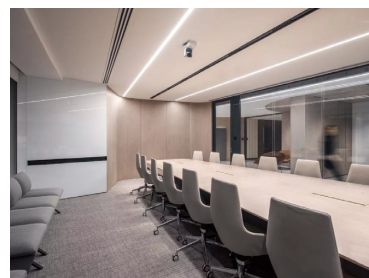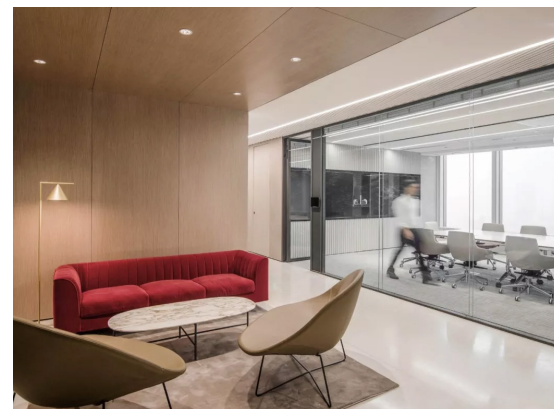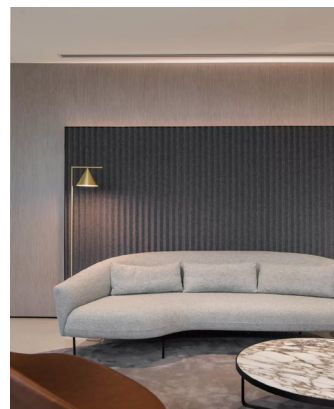




Shanghai
Bain Capital 貝恩資本
 Robarts spaces & Studio illumine

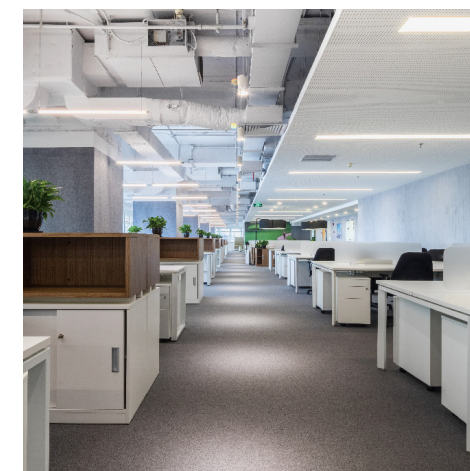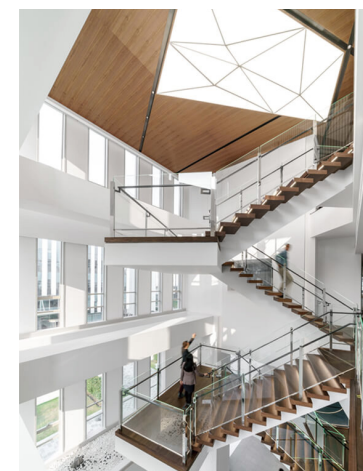






Shanghai
ABBOTT 雅培
 Robarts spaces & M Moser Associates & Studio illumine

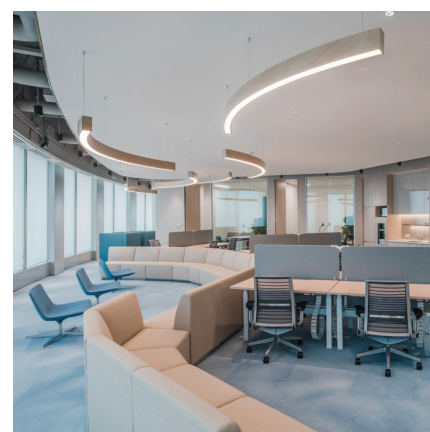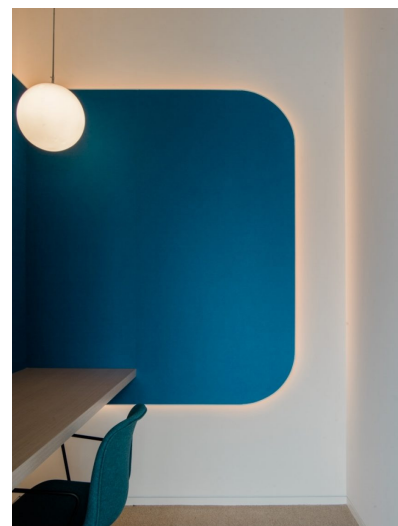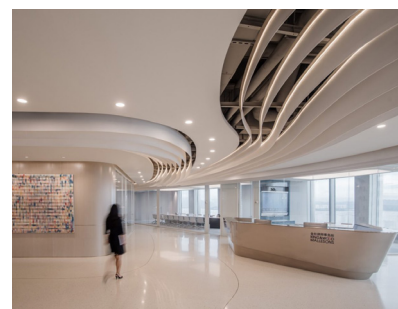

Guangzhou
King&Wood Mallesons 金杜律師事務所
 Robarts spaces & Studio illumine

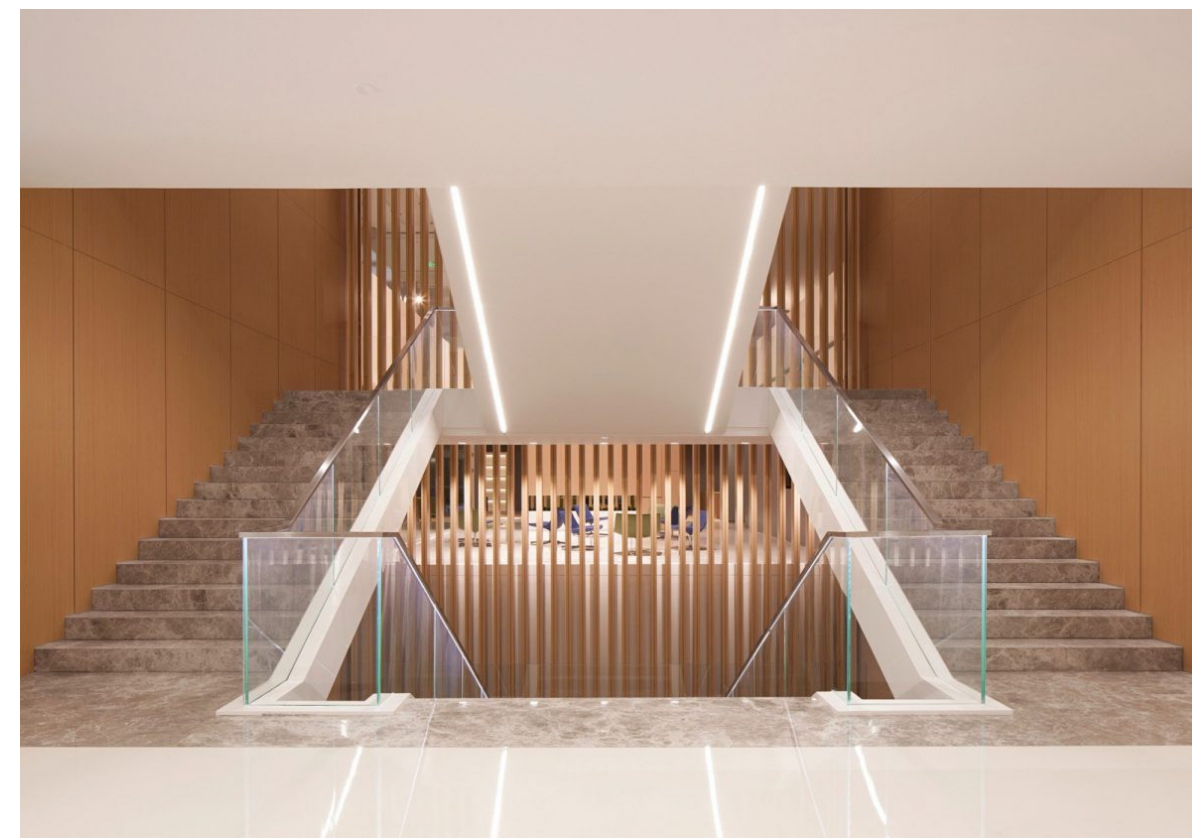







Shanghai
APP (sinarmas) 金光集團中国總部
 Robarts spaces & Studio illumine

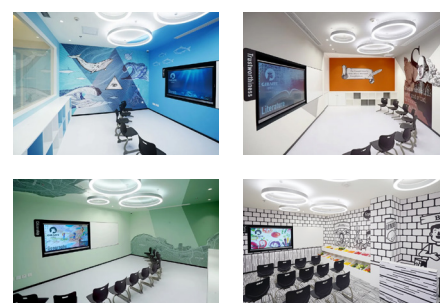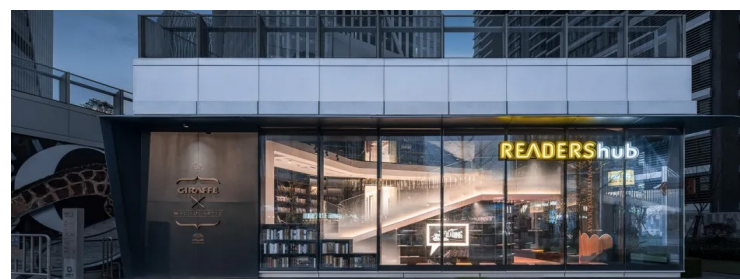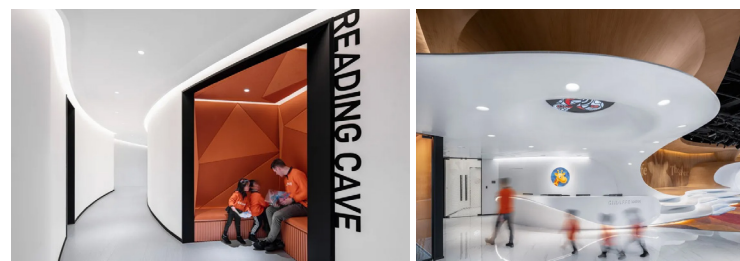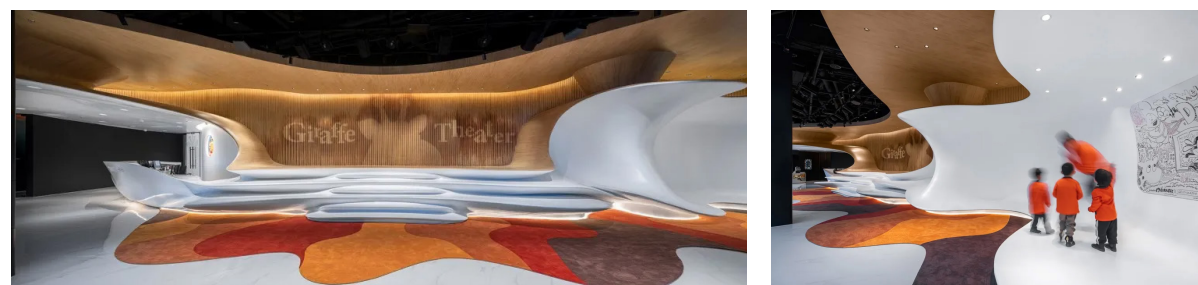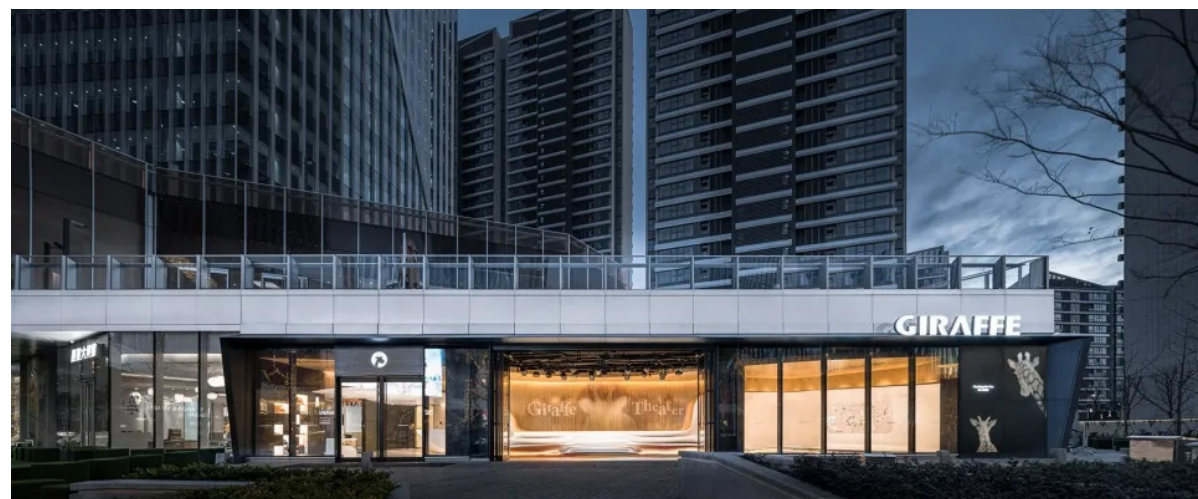

Shanghai
Giraffe School 长颈鹿美语
 Robarts spaces & Studio illumine




Beijing
CITIGO 北京三元桥
 MoHen Chao Design 赵牧恒

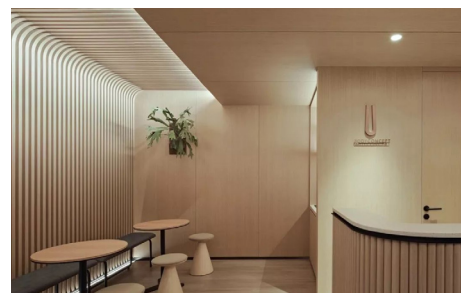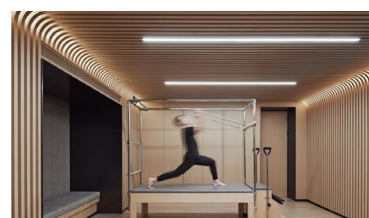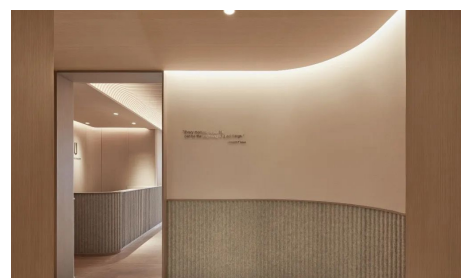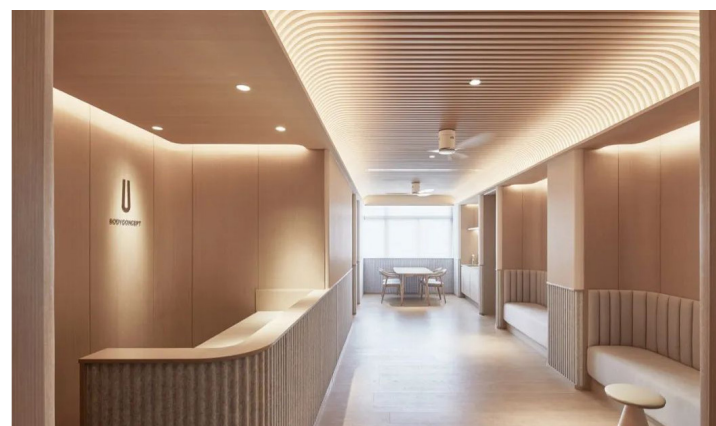



Shanghai
BodyConcept Pilates Studio 普拉提工作室
 Vermilion Zhou Design Group 朱周空間設計










Beijing
Haidilao Smart Restaurant 海底捞智慧餐廳
 Vermilion Zhou Design Group 朱周空間設計

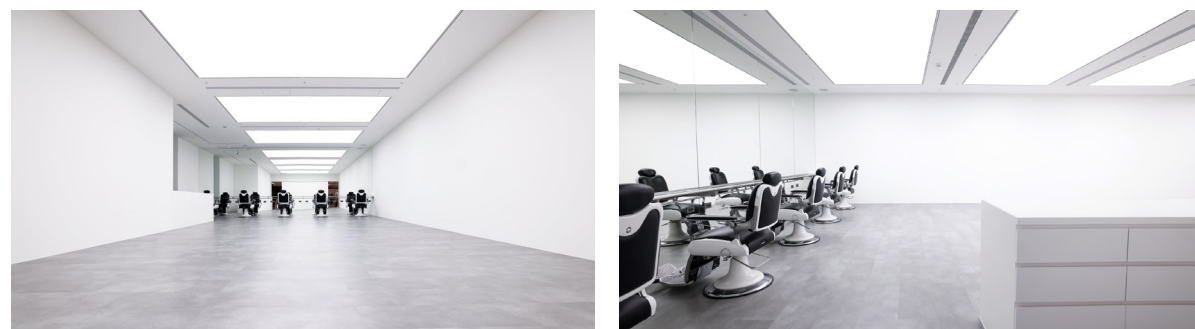





Taipei
Sculptor barber 理髮美術館
 UNION ATELIER 合事設計

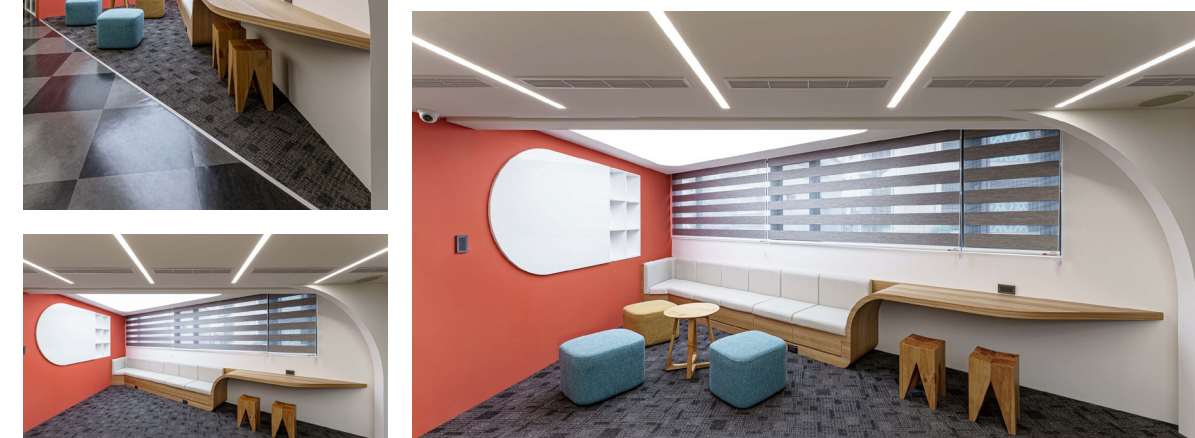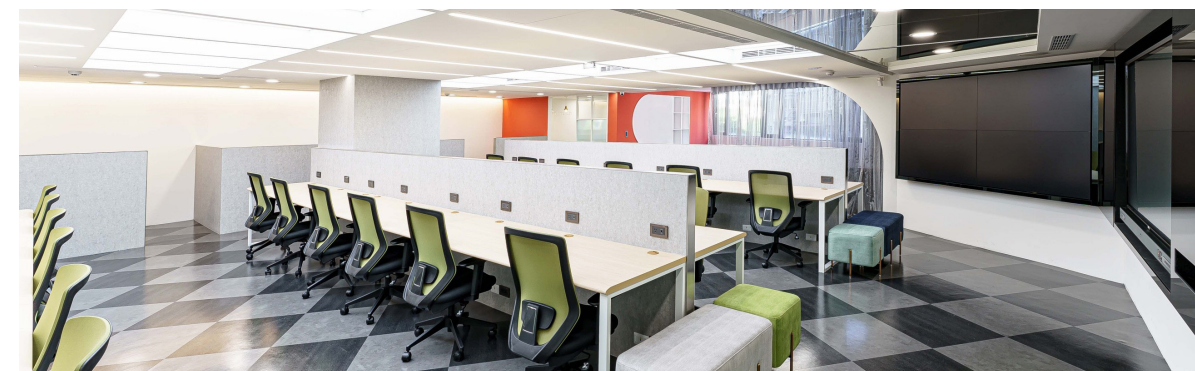



Taipei
FamilyMart office 全家便利商店辦公室
 Pailey Interior Design

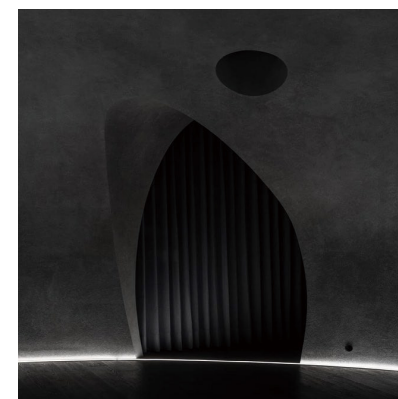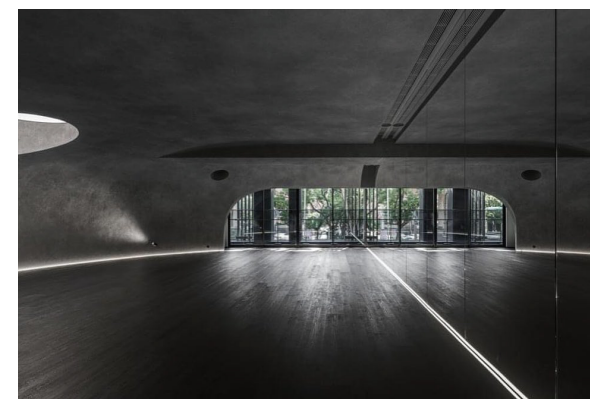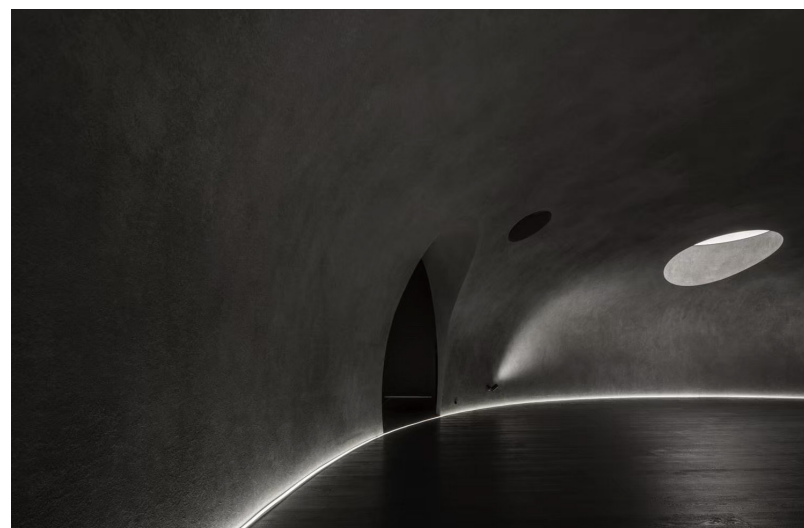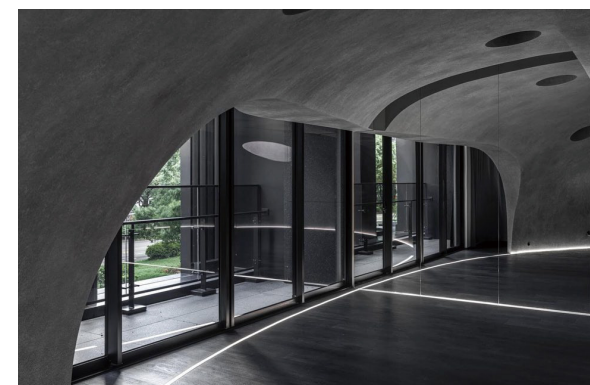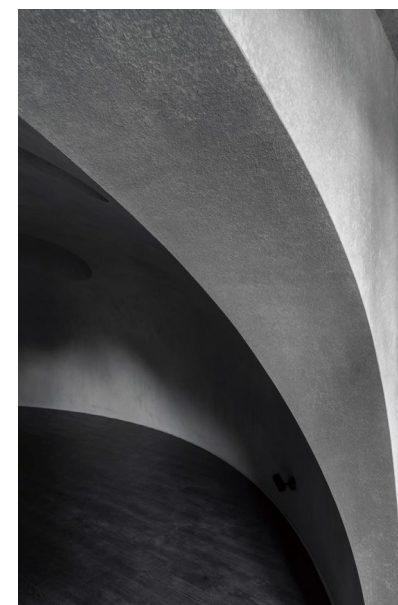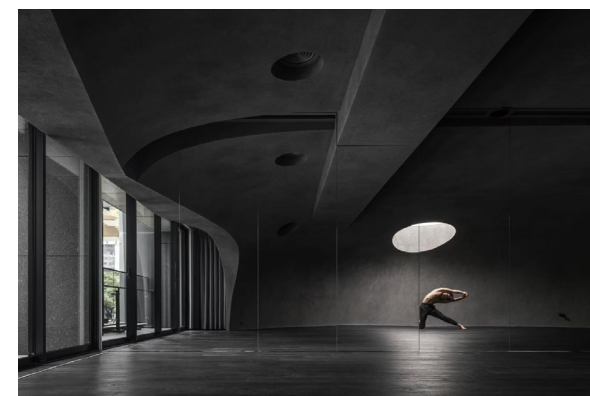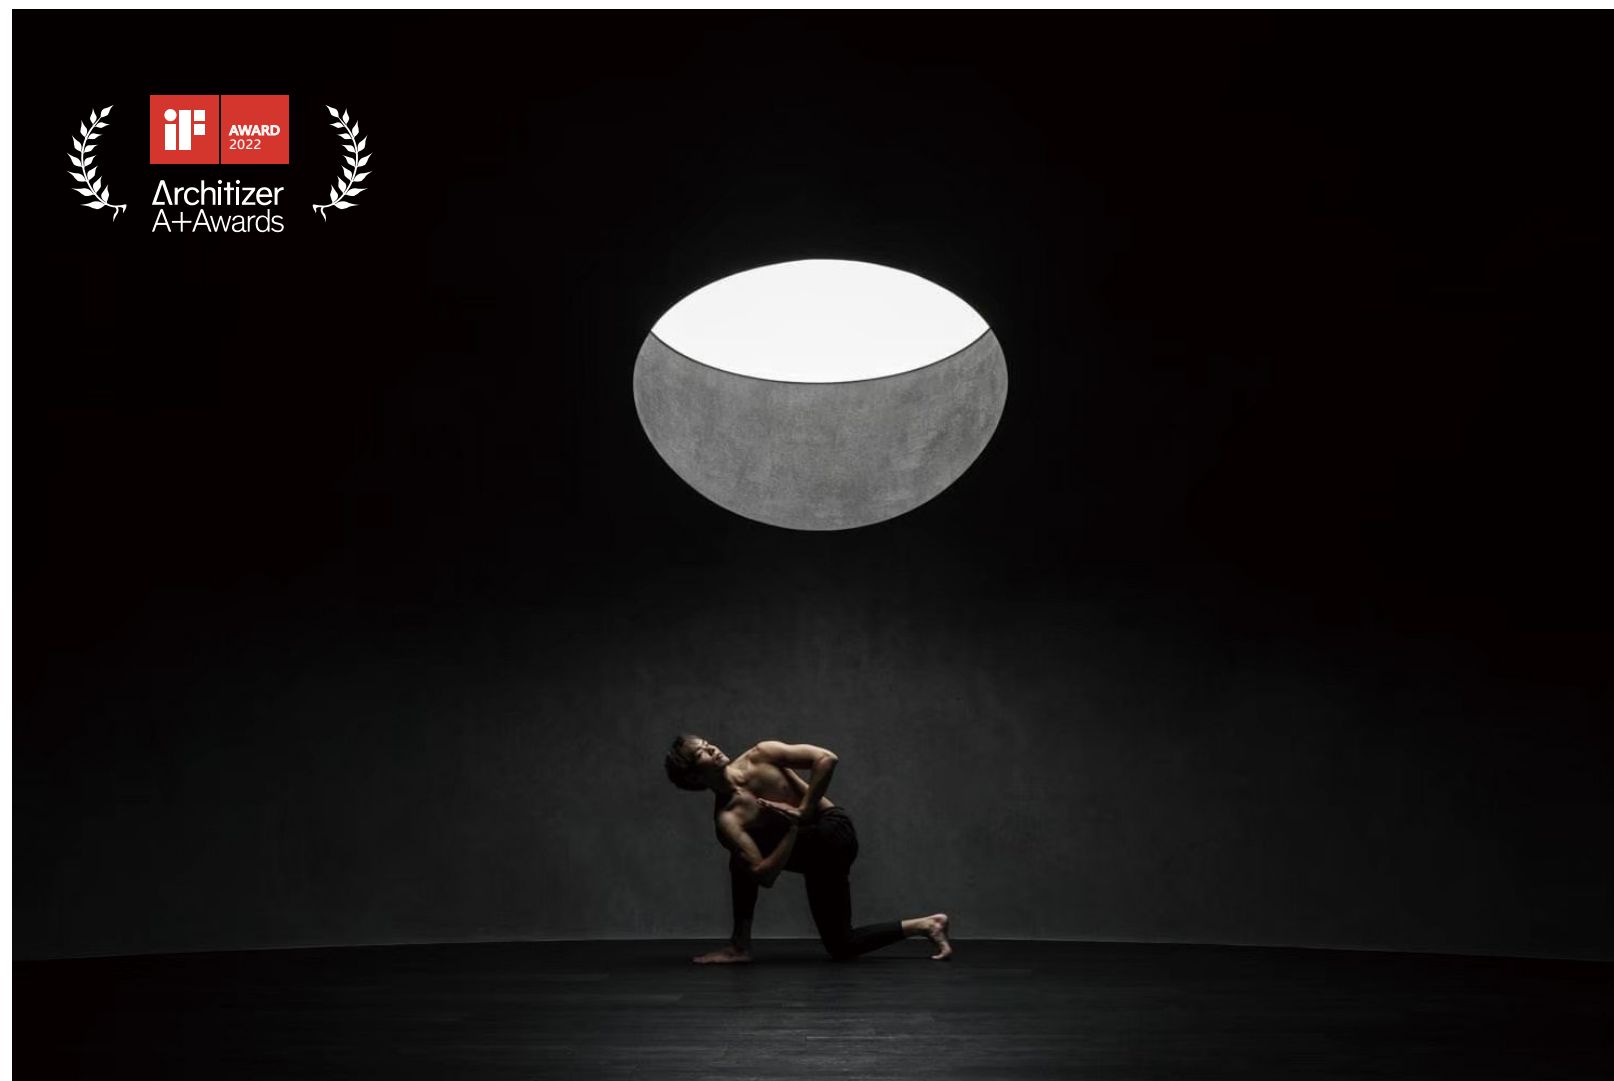






Taipei
Self-Revealing 隱世修煉
 StudioX4 乘四建築

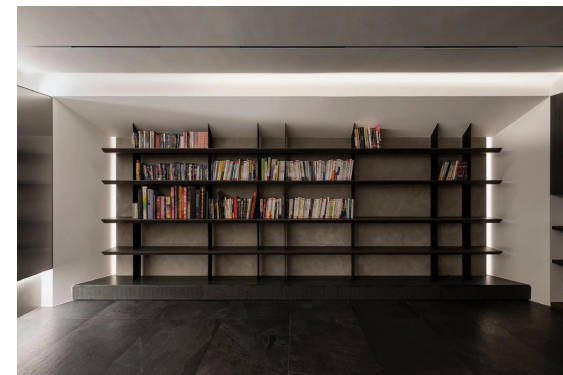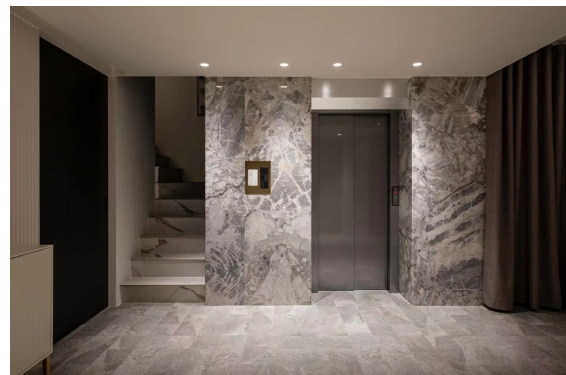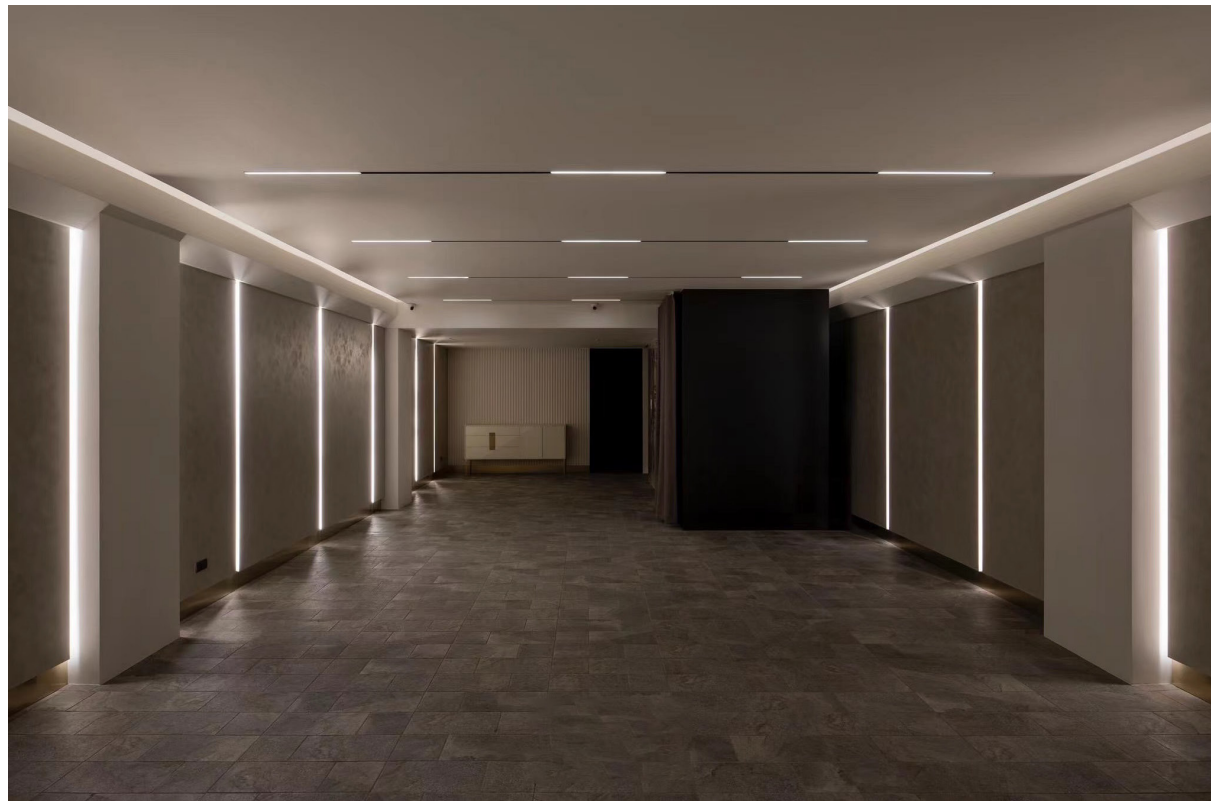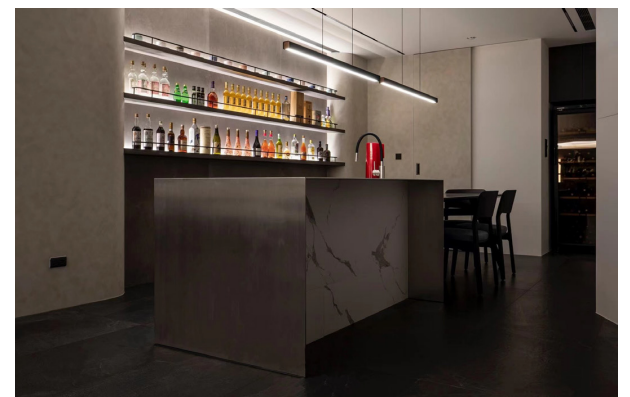

Taichung
Tipsy 微醺 赫里翁私宅
 HÖmu Design Studio 禾畝設計

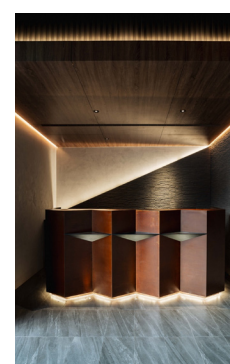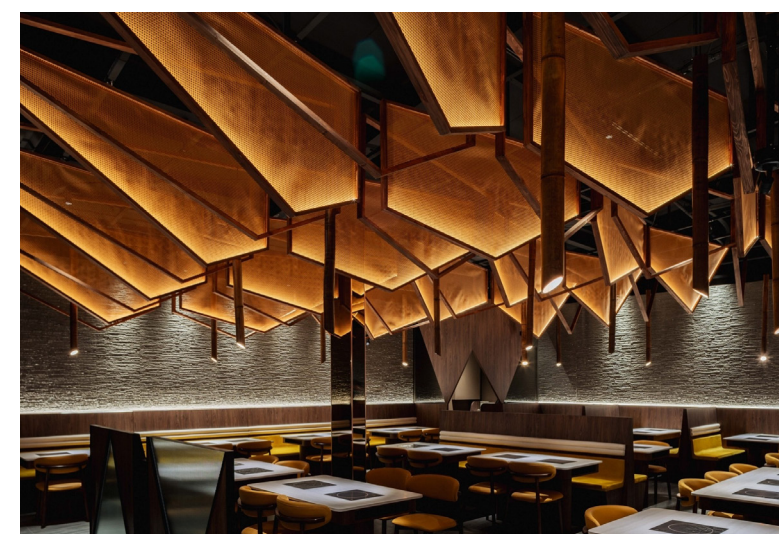


Taichung
Suki-yaki 北澤壽喜焼
 Sky eye league 晴天見設計

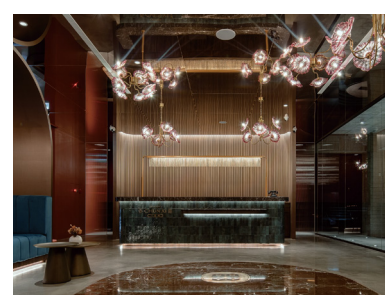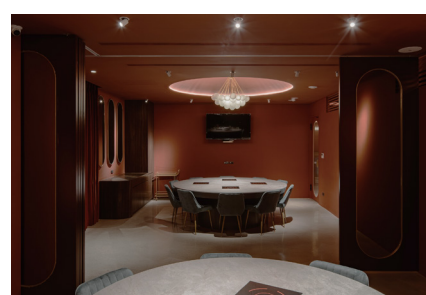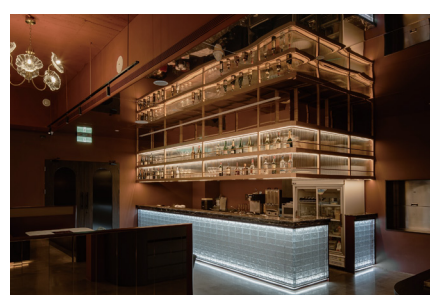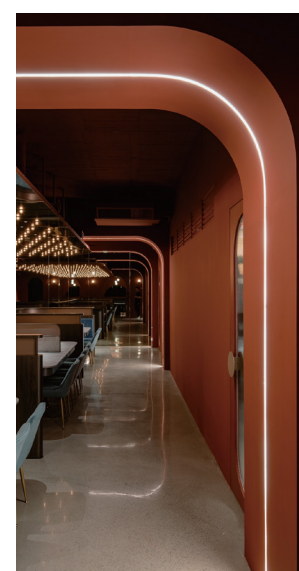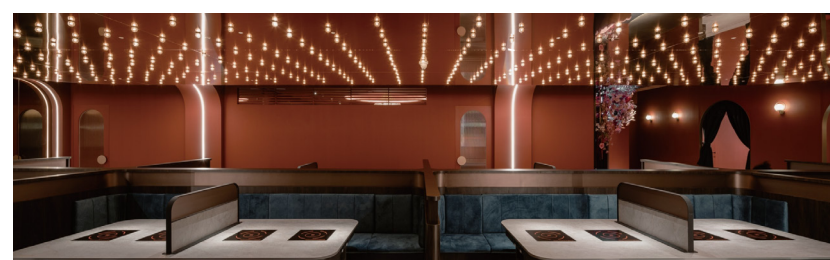

Taichung
CHUN XI 春囍打邊爐
 Sky eye league 晴天見設計

LINEAR

P.26



GL-BW0709




GL-BW1010



GL-BW1010B



GL-BW1010BB



GL-BW1613



GL-BW2613



GL-CH1911K



GL-BW2020B



GL-BW1616C



GL-CH3030C



GL-HO3030K



GL-BW3535



GL-BW4043



GL-BW5035



GL-BW5050



GL-BW-T30



GL-BW-T60



GL-BW-T120



GL-SW2109



GL-SW2409

REFLECTION LINEAR

P.30



GL-QSG4118



GL-QSG4118B



GL-QSG3825



GL-QSG3820



GL-QSG4320



GL-QSG8556



GL-QSG8556B



GL-QSG2655




GL-QSG2696



GL-QSG10037



GL-QSG11637



GL-QSG3596



GL-QSG3212B



GL-QSG9214



GL-QSG12055-2525C



GL-QSG7058

HIGH VOLTAGE

P.34



GL-SW-COB-110V
(IP65)



GL-SW-COB-220V
(IP65)



GL-SW-2835W60-110V
(IP67)



GL-SW-2835W60-230V
(IP67)

LED STRIPS

P.36



GL-2835-125L-5MM




GL-SW2835-120L-8MM



GL-SW2835-224L-10MM



GL-SW2835-320L-24MM



GL-2835-60L-8MM



GL-SW-COB-400-5MM-24V



GL-SW5050-60L-RGB



GL-SW5050-60-RGBW



GL-CH2216-280L



GL-SW2216-CTA240

FLEXIBLE LINEAR

P.39



GL-SW-NFTS1212



GL-SW-NFS1212



GL-SW-NFT1616



GL-SW-NFS1616



NEW
GL-SW-NF3D1616B

BARRISOL

PANEL DOWNLIGHT / PLC

P.41



GL-SW120



GL-SW576CTA



GL-SW-162RGB



GL-SW-162RGBW



GL-JL-KMTH600X600



GL-JL-KMTH600X1200



GL-PLC 600*600



GL-PLC 600*1200



GL-PLC 800W



GL-PLC 1100W

POT

P.45

NEW



GL-NS-TM75

NEW



GL-NS-TM95

NEW



GL-NS-TM125

NEW



GL-NS-TM150

SPOT

THIN

ZOOM RECESSED

DOWNLIGHT

P.46



GL-XW1306



GL-XW1395T

NEW



GL-XJE23055A

NEW



GL-XJE23075A



GL-SKC033103



GL-XW-DZSD37



GL-XW-DZSD37N



GL-WD35-ZPDB-A107



GL-WX35



GL-WX75-MNDB2810



GL-ST8376-P75P



GL-ST1275



GL-ST8486-S75Q

TZ

FIND

P.52



GL-TZ-L55Y-1



GL-TZ-L75Y-1



GL-TZ-L95Y-1



GL-XW4101



GL-XW4102



GL-WB4401



GL-WB4402

EYES TRIMLESS

P.54



GL-JRST01



GL-JRST02



GL-JRST05



GL-JRST10



GL-JRS01



GL-JRS02



GL-JRS05



GL-JRS10

NEW



GL-SK-SMTG03-14025006

NEW



GL-SK-SMTG06-14026012

NEW



GL-SK-SMTG12-14027024

NEW



GL-SK-SMTG03-14025106

NEW



GL-SK-SMTG06-14026112

NEW



GL-SK-SMTG12-14027124

NEW



GL-SK-SMTG03-14025006F

NEW



GL-SK-SMTG06-14026012F

NEW



GL-SK-SMTG12-14027024F

NEW



GL-SK-SMTG03-14025106F

NEW



GL-SK-SMTG06-14026112F

NEW



GL-SK-SMTG12-14027124F


SIMPLE

P.58



TRACK SPOTLIGHT

P.60

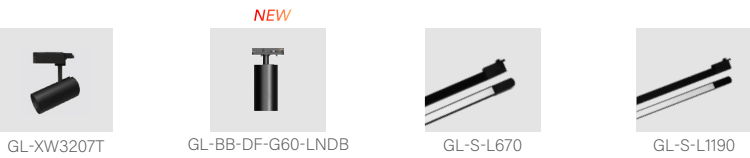

JW MAGNET 48V SYSTEM

P.62



LU MAGNETIC

LU SURFACE

P.69



SKYLINE2.0 OUT DOOR

P.72




COLOR TEMPERATURE CONSISTENCY 色溫一致性

Greatlighting knows well the requirement for color temperature consistency for the quality lighting and also faces the phenomenon of inconsistency in terms of color temperature in market. It is a headache of designers and the consumers.

For this purpose, Greatlighting applied the LED chips at high consistency (SDCM≤3) from the quality chips manufacturers.All LED chips are sorted out,stored and pcessed in strict and scientific criterion to guarantee the led chips are consistent in the same batch.

大燁照明深知優質照明對色溫一致性的要求，也面臨市場上色溫不一致的現象，是設計師和消費者頭痛的問題。

為此，大燁照明採用了高一致性的LED晶片 (SDCM≤3) 來自優質晶片製造商。所有LED晶片均按照嚴格科學的標準進行分類、儲存和加工，以確保LED晶片在同一批次中的一致性。

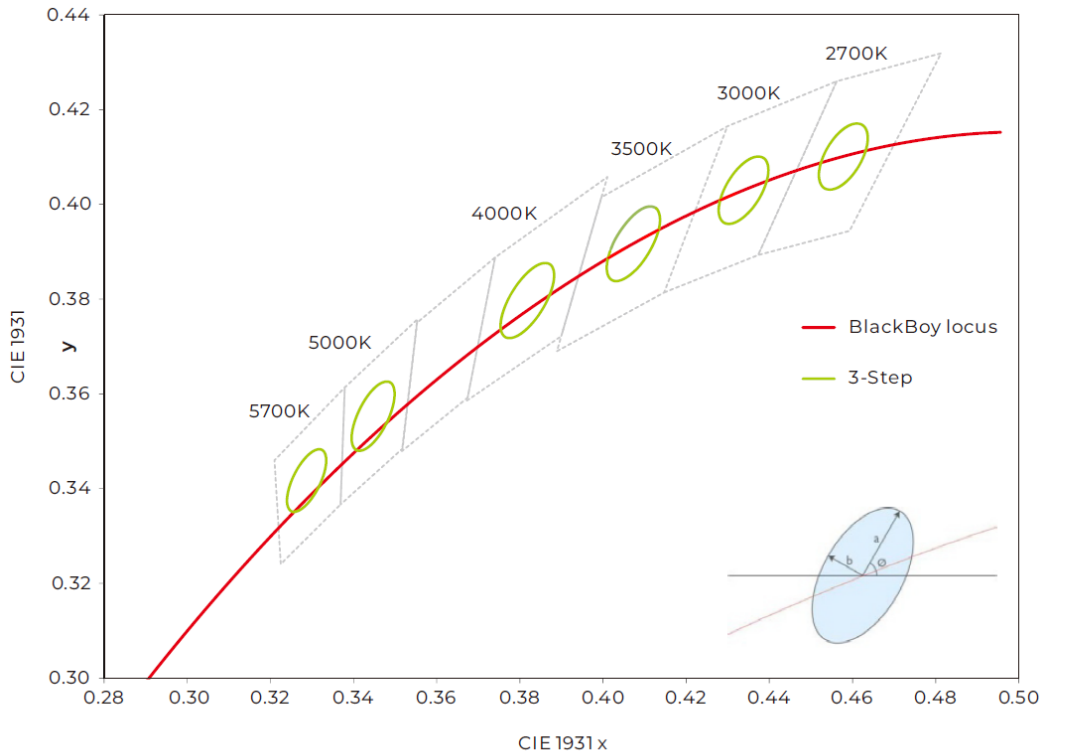


SDCM≤3 (3 step MacAdam ellipse)




▲ SDCM≤3 ▲ SDCM≤3

SDCM≤5 (5 step MacAdam ellipse)



▲ SDCM≤3 ▲ SDCM≤5

SDCM≤7 (7 step MacAdam ellipse)



▲ SDCM≤3 ▲ SDCM≤7

HIGH CRI(HIGH COLOR SATURATION) 高CRI(高色彩飽和度)

The color rendering index of sunlight is defined as 100, and the color rendering index of incandescent lamps is very close to sunlight, so it is regarded as an ideal reference light source.

Greatlighting series adopt world top class LED chip. High color rendering with Ra > 90 makes the subject natural and fresh while few LED products can do so at present. Lighting in high power & high CRI makes the subject outstand in color and material feature, and thus perfectly reflecting the colors of the subject and of human beings. It is an idea lighting solution for the boutiques and important social activities places etc.

太陽光的顯色指數定義為100，白熾燈的顯色指數非常接近日光，因此被視為理想的基準光源。

大燁照明採用世界頂級LED晶片。Ra > 90的高顯色性接近自然光底下的色彩飽和，目前很少有LED產品可以做到這一點。高功率高顯色指數的照明使被攝體在色彩和材質特性上突出，從而完美地反映被攝體的顏色和人體。它是精品店和餐飲社交活動場所等的理想照明解決方案。


High color rendering index 顯色評價指數

The graph below shows the color rendering evaluation numbers of the reference light and "Quality plus Q+". The average color rendering evaluation number is Ra96, red R9-95, and flesh color R15-97, with color reproduction performance close to sunlight. 下图表示基準光和 "Quality plus Q+" 的演色评价数。平均演色评价数为Ra96，红色R9-95，肉色R15-97，具有接近太阳光的颜色再现性能。

	Ra	R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
	Average															
Q+	96	98	98	96	94	98	96	95	96	95	97	93	93	97	97	97
中演色	83	82	92	95	80	82	91	82	57	4	82	78	69	84	98	73
昼白色螢光燈	79	89	89	54	82	81	72	86	76	16	40	63	55	92	70	92

※ Ra is the average value of the values from R1 to R8, and is a representative value of the color rendering evaluation index. Ra是R1~R8為止的數值的平均值，是顯色評價指數的代表性的值

※ The special color evaluation index R9 (red) and R15 (Asian skin color) are important wavelengths for looking beautiful. 特殊顏色評價指數R9(紅色)和R15(亞洲人的膚色)，是看起來漂亮的重要波長。

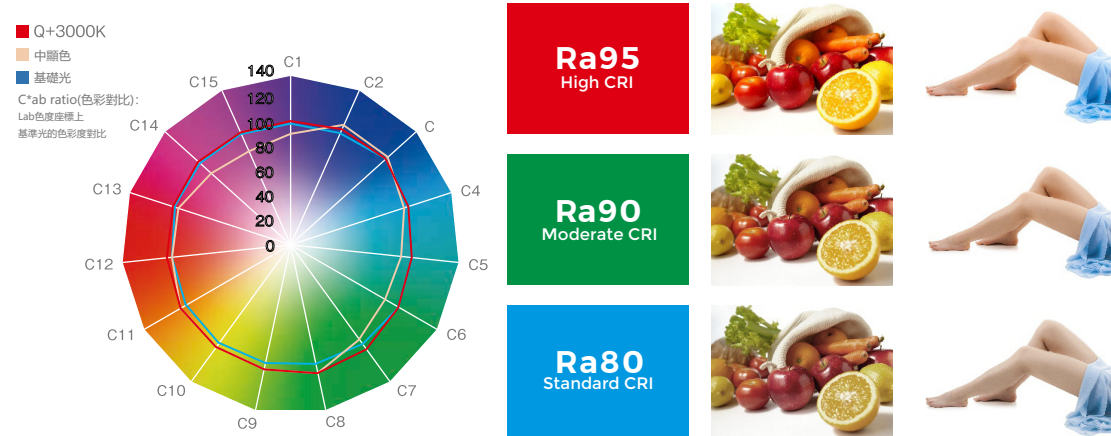


※ The upper left graph shows the comparison of the color saturation between the reference light and the "Quality plus Q+" wavelengths. It has chromaticity performance that exceeds the reference light in all wavelength regions. 左上圖表示基準光和「Quality plus Q+」的各波長的色飽和度比較。在所有的波長區域都具有超過基準光的色度表現性能。

TRU COLOUR 全光譜

The Tru Colour spectrum surpasses industry metrics for light quality, giving our LEDs the highest CRI rating in the industry - with a score of up to 99 on CRI levels. However, we have found that CRI is an outdated value. That's why we place more value in our industry leading TM-30 rating of 99.

Tru Colour LEDs incorporate over 1 billion colours within its wavelengths. This provides the optimal lighting balance for your space, an overall sense of wellbeing, and enhances the appearance of interiors making wood, food, and skin tones appear more natural and lifelike. Make any place magical with Tru Colour illumination


TM-30-15 measures against 99 color samples, all used to provide Fidelity (Rf), Gamut (Rg) and Color Vector Graphics. TM-30-15 針對 99 個顏色樣本進行測量，兩者皆用於提供保真度 (Rf)、色域 (Rg) 和彩色向量圖。

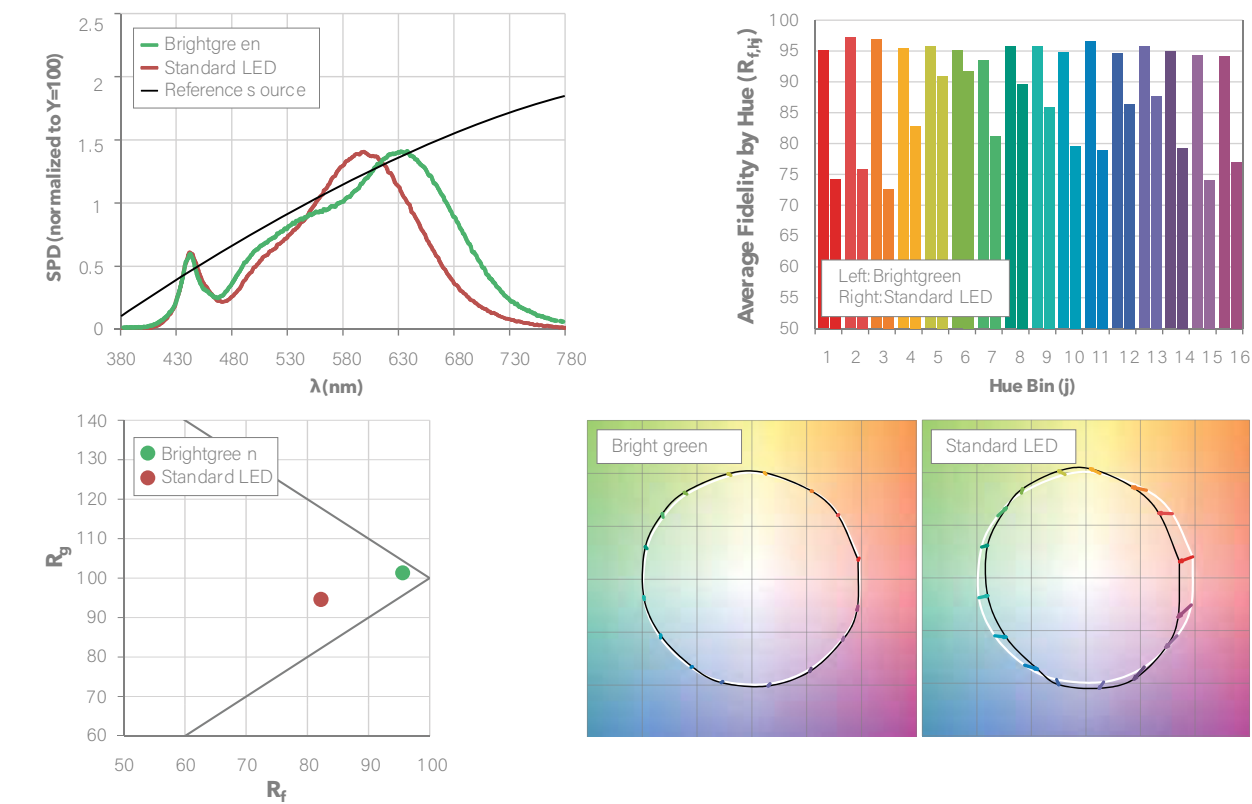

The Difference

We take greater pride in the measurements we achieve on the TM-30 scale. Nevertheless, Tru Colour is the industry leader in both lighting metrics.

我們為我們在 TM-30 規模上所取得的測量結果感到更加自豪。然而，Tru Color 在這兩個照明指標方面都是行業領導者。

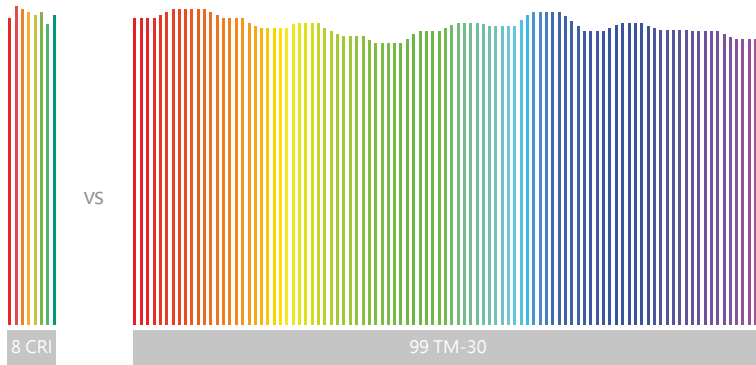

BRAND NEW MODULAR SYSTEM 全新模組化系統



ADOPT NEW DEVELOPED HIGH POWER HIGH EFFICIENCY LED(COB) CHIPS AND LED MODULES CHIPS , WHICH IMPROVES LED LIMINANCE AND EFFICIENCY
採用全新開發的高功率高效率LED(COB)晶片及LED模組晶片，提升LED的亮度與效率

USE LOWEST ENERGY CONSUMPTION TO ACHIEVE MAXIMUM LUMINANCE OUTPUT , SO THAT IMPROVETHE OVERALL EFFICIENCY OF LUMINAIRE BY COMBINATION OF PATENT DESIGN OPTICAL LENS AND REFLECTORS
以最低的能耗達到最大的亮度輸出，透過專利設計的光學透鏡和反射器的組合提高燈具的整體效率。

INNOVATIVE SUPER COMFORTABLE LIGHT DISTRIBUTION TECHNOLOGY COMBINED WITH DIRECTIONAL CALCULUS OPTICAL DESIGN, WITH A SHADING ANGLE UP TO 41° STRUCTURE LAYOUT, TO ACHIEVE UGR<10;
創新的超舒適配光技術結合定向微積分光學設計，遮光角高達41°的結構佈局，實現UGR<10；

WITH BEZEL-FREE AND NARROW FRAME COMPONENTS, A VARIETY OF FACE RING ACCESSORIES TO MEET DIFFERENT DECORATION STYLES.
擁有無邊框與窄邊框組件選擇，多種面環配件搭配，滿足不同的裝潢風格。


擁有無邊框與窄邊框組件選擇，多種面環配件搭配，滿足不同的裝潢風格。




OPTICAL PROCESSING 光學處理

WITH AN EMPHASIS ON VISUAL QUALITY, OUR OPTICS ENSURE SMOOTH, EVEN BEAM DISTRIBUTIONS WITH EXCEPTIONAL OPTICAL CONTROL
強調視覺質量，我們的光學元件透過卓越的光學控制確保平滑、均勻的光束分佈

- SOFT, SMOOTH EDGE
- NO STRIATIONS
- EVEN COLOUR
- 柔軟光滑的邊緣
- 無條紋
- 顏色均勻

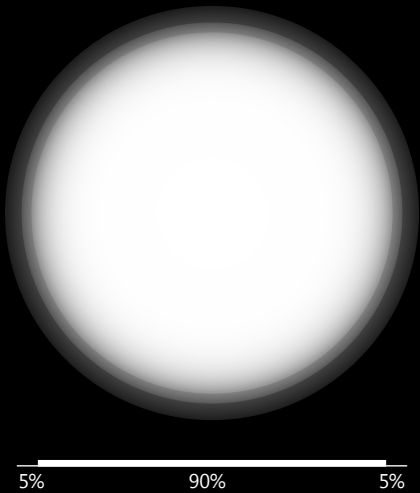


Luminosity intensity

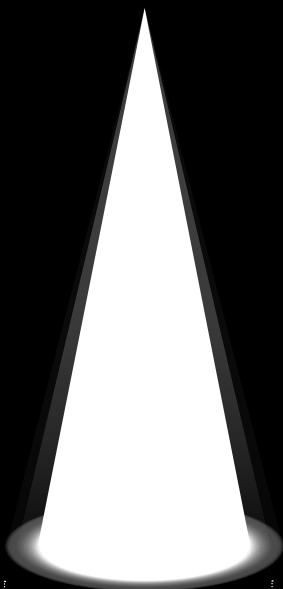


Beam angle

Field angle

ASYMMETRIC WALLWASH

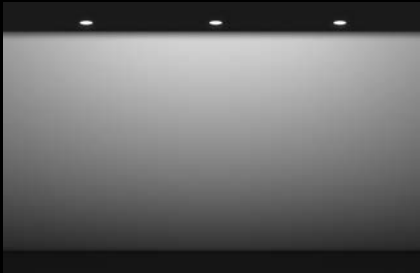

ADJUSTABLE MODEL

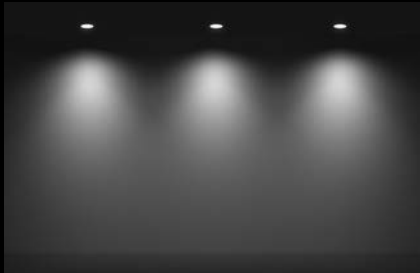

NARROW SPOT 8°




NARROW 24°



MEDIUM 38°






WIDE 60°

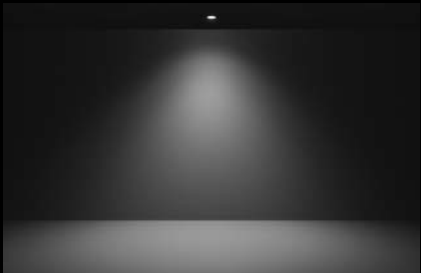



GL-BW0709LED線型燈



功率 Watts	5W / 9.6W / 10W (Meter)
色溫 Color temperature	3000K / 4000K / 2700K-6000K
光效 Light efficiency	65lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	AI ☐ WH ☐

Available

ON/OFF

TRIAC

0-10V

DALI

PLC


☐ Dimmable

☐ Tunable white

CE

CB

GL-BW1010LED線型燈



功率 Watts	5W / 9.6W / 10W (Meter)
色溫 Color temperature	3000K / 4000K / 2700K-6000K
光效 Light efficiency	65lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	AI ☐ WH ☐

Available

ON/OFF

TRIAC

0-10V

DALI

PLC



☐ Dimmable

☐ Tunable white

CE

CB

GL-BW1010BLED線型燈



功率 Watts	5W / 9.6W / 10W (Meter)
色溫 Color temperature	3000K / 4000K / 2700K-6000K
光效 Light efficiency	65lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	AI ☐ WH ☐

Available

ON/OFF

TRIAC

0-10V

DALI

PLC



☐ Dimmable

☐ Tunable white

CE

CB

GL-BW1010BBLED線型燈



功率 Watts	5W / 9.6W / 10W (Meter)
色溫 Color temperature	3000K / 4000K / 2700K-6000K
光效 Light efficiency	65lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	AI ☐ WH ☐

Available

ON/OFF

TRIAC

0-10V

DALI

PLC



☐ Dimmable

☐ Tunable white

CE

CB

GL-BW1613LED線型燈



功率 Watts	5W / 9.6W / 10W / 11.52W / 14.4W (Meter)
色溫 Color temperature	3000K / 4000K / 2700K-6000K
光效 Light efficiency	65lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	AI ☐ WH ☐

Available

ON/OFF

TRIAC

0-10V

DALI

PLC



☐ Dimmable

☐ Tunable white

CE

CB

GL-BW2613LED線型燈



功率 Watts	5W / 9.6W / 10W / 11.52W / 14.4W (Meter)
色溫 Color temperature	3000K / 4000K / 2700K-6000K
光效 Light efficiency	65lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	AI ☐ WH ☐

Available

ON/OFF

TRIAC

0-10V

DALI

PLC



☐ Dimmable

☐ Tunable white

CE

CB

GL-CH1911KLED線型燈



功率 Watts	14.4W / 19.2W / 20.16W / 22W (Meter)
色溫 Color temperature	3000K / 4000K / 2700K-6000K / RGB(W)
光效 Light efficiency	65lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	AI ☐ WH ☐

Available

ON/OFF

TRIAC

0-10V

DALI

PLC




☐ Dimmable

☐ Tunable white

CE

CB

GL-BW2020BLED線型燈



功率 Watts	14.4W / 19.2W / 20.16W / 22W (Meter)
色溫 Color temperature	3000K / 4000K / 2700K-6000K / RGB(W)
光效 Light efficiency	65lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	AI ☐ WH ☐

Available

ON/OFF

TRIAC

0-10V

DALI




☐ Dimmable

☐ Tunable white

CE

CB

GL-BW1616C LED線型燈






功率 Watts	5W / 9.6W / 10W / 11.52W / 14.4W (Meter)
色溫 Color temperature	3000K / 4000K / 2700K-6000K
光效 Light efficiency	65lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	AI ☐ WH ☐
Available	☐ Dimmable ☐ Tunable white
ON/OFF	
TRIAC	
0-10V	
DALI	
PLC	

CE CB





GL-CH3030C LED線型燈






功率 Watts	14.4W / 19.2W / 20.16W / 22W (Meter)
色溫 Color temperature	3000K / 4000K / 2700K-6000K / RGB(W)
光效 Light efficiency	70lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	AI ☐ WH ☐
Available	☐ Dimmable ☐ Tunable white ☐ RGBW
ON/OFF	
TRIAC	
0-10V	
DALI	
PLC	

CE CB





GL-HO3030K LED線型燈





功率 Watts	14.4W / 19.2W / 20.16W / 22W / 33.3W (Meter)
色溫 Color temperature	3000K / 4000K / 2700K-6000K / RGB(W)
光效 Light efficiency	65lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	AI ☐ WH ☐
Available	☐ Dimmable ☐ Tunable white ☐ RGBW
ON/OFF	
TRIAC	
0-10V	
DALI	
PLC	

CE CB





GL-BW3535 LED線型燈





功率 Watts	14.4W / 19.2W / 20.16W / 22W / 33.3W (Meter)
色溫 Color temperature	3000K / 4000K / 2700K-6000K / RGB(W)
光效 Light efficiency	70lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	AI ☐ WH ☐
Available	☐ Dimmable ☐ Tunable white ☐ RGBW
ON/OFF	
TRIAC	
0-10V	
DALI	
PLC	

CE CB





GL-BW4043 LED線型燈





功率 Watts	14.4W / 19.2W / 20.16W / 22W / 33.3W (Meter)
色溫 Color temperature	3000K / 4000K / 2700K-6000K / RGB(W)
光效 Light efficiency	70lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	AI ☐ WH ☐
Available	☐ Dimmable ☐ Tunable white ☐ RGBW
ON/OFF	
TRIAC	
0-10V	
DALI	
PLC	

CE CB





GL-BW5035 LED線型燈





功率 Watts	14.4W / 19.2W / 20.16W / 22W / 33.3W (Meter)
色溫 Color temperature	3000K / 4000K / 2700K-6000K / RGB(W)
光效 Light efficiency	70lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	AI ☐ WH ☐
Available	☐ Dimmable ☐ Tunable white ☐ RGBW
ON/OFF	
TRIAC	
0-10V	
DALI	
PLC	

CE CB





GL-BW5050 LED線型燈



功率 Watts	14.4W / 19.2W / 20.16W / 22W / 33.3W (Meter)
色溫 Color temperature	3000K / 4000K / 2700K-6000K / RGB(W)
光效 Light efficiency	70lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	AI ☐ WH ☐
Available	☐ Dimmable ☐ Tunable white ☐ RGBW
ON/OFF	
TRIAC	
0-10V	
DALI	
PLC	


CE CB





GL-BW-T30

LED線型燈




功率 Watts	14.4W / 19.2W / 20.16W / 22W (Meter)
色溫 Color temperature	3000K / 4000K / 2700K-6000K / RGB(W)
光效 Light efficiency	65lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	AI ☐ WH ☐
Available	☐ Dimmable ☐ Tunable white ☐ RGBW
ON/OFF	☐
TRIAC	☐
0-10V	☐
DALI	☐
PLC	☐



GL-BW-T60

LED線型燈




功率 Watts	14.4W / 19.2W / 20.16W / 22W / 33.3W (Meter)
色溫 Color temperature	3000K / 4000K / 2700K-6000K / RGB(W)
光效 Light efficiency	70lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	AI ☐ WH ☐
Available	☐ Dimmable ☐ Tunable white ☐ RGBW
ON/OFF	☐
TRIAC	☐
0-10V	☐
DALI	☐
PLC	☐



GL-BW-T120

LED線型燈




功率 Watts	14.4W / 19.2W / 20.16W / 22W / 33.3W (Meter)
色溫 Color temperature	3000K / 4000K / 2700K-6000K / RGB(W)
光效 Light efficiency	70lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	AI ☐ WH ☐
Available	☐ Dimmable ☐ Tunable white ☐ RGBW
ON/OFF	☐
TRIAC	☐
0-10V	☐
DALI	☐
PLC	☐







GL-SW2109

LED線型燈



功率 Watts	5W / 9.6W / 10W (Meter)
色溫 Color temperature	3000K / 4000K / 2700K-6000K
光效 Light efficiency	70lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	AI ☐ WH ☐
Available	☐ Dimmable ☐ Tunable white
ON/OFF	☐
TRIAC	☐
0-10V	☐
DALI	☐
PLC	☐

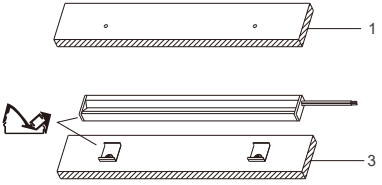



- 1.膨脹螺栓嵌入安裝面。
- 2.通過螺絲固定夾子。
- 3.線型燈安裝在夾子上。
- 4.連接LED線型燈電源。






- 1.The expansion bolt is embedded into the mounting surface.
- 2.Fixing clip through screw.
- 3.The linear Light is installed on the clip.
- 4.Connect LED Linear Light power supply.


GL-SW2409

LED線型燈



功率 Watts	5W / 9.6W / 10W (Meter)
色溫 Color temperature	3000K / 4000K / 2700K-6000K
光效 Light efficiency	70lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	AI ☐ WH ☐
Available	☐ Dimmable ☐ Tunable white
ON/OFF	☐
TRIAC	☐
0-10V	☐
DALI	☐
PLC	☐






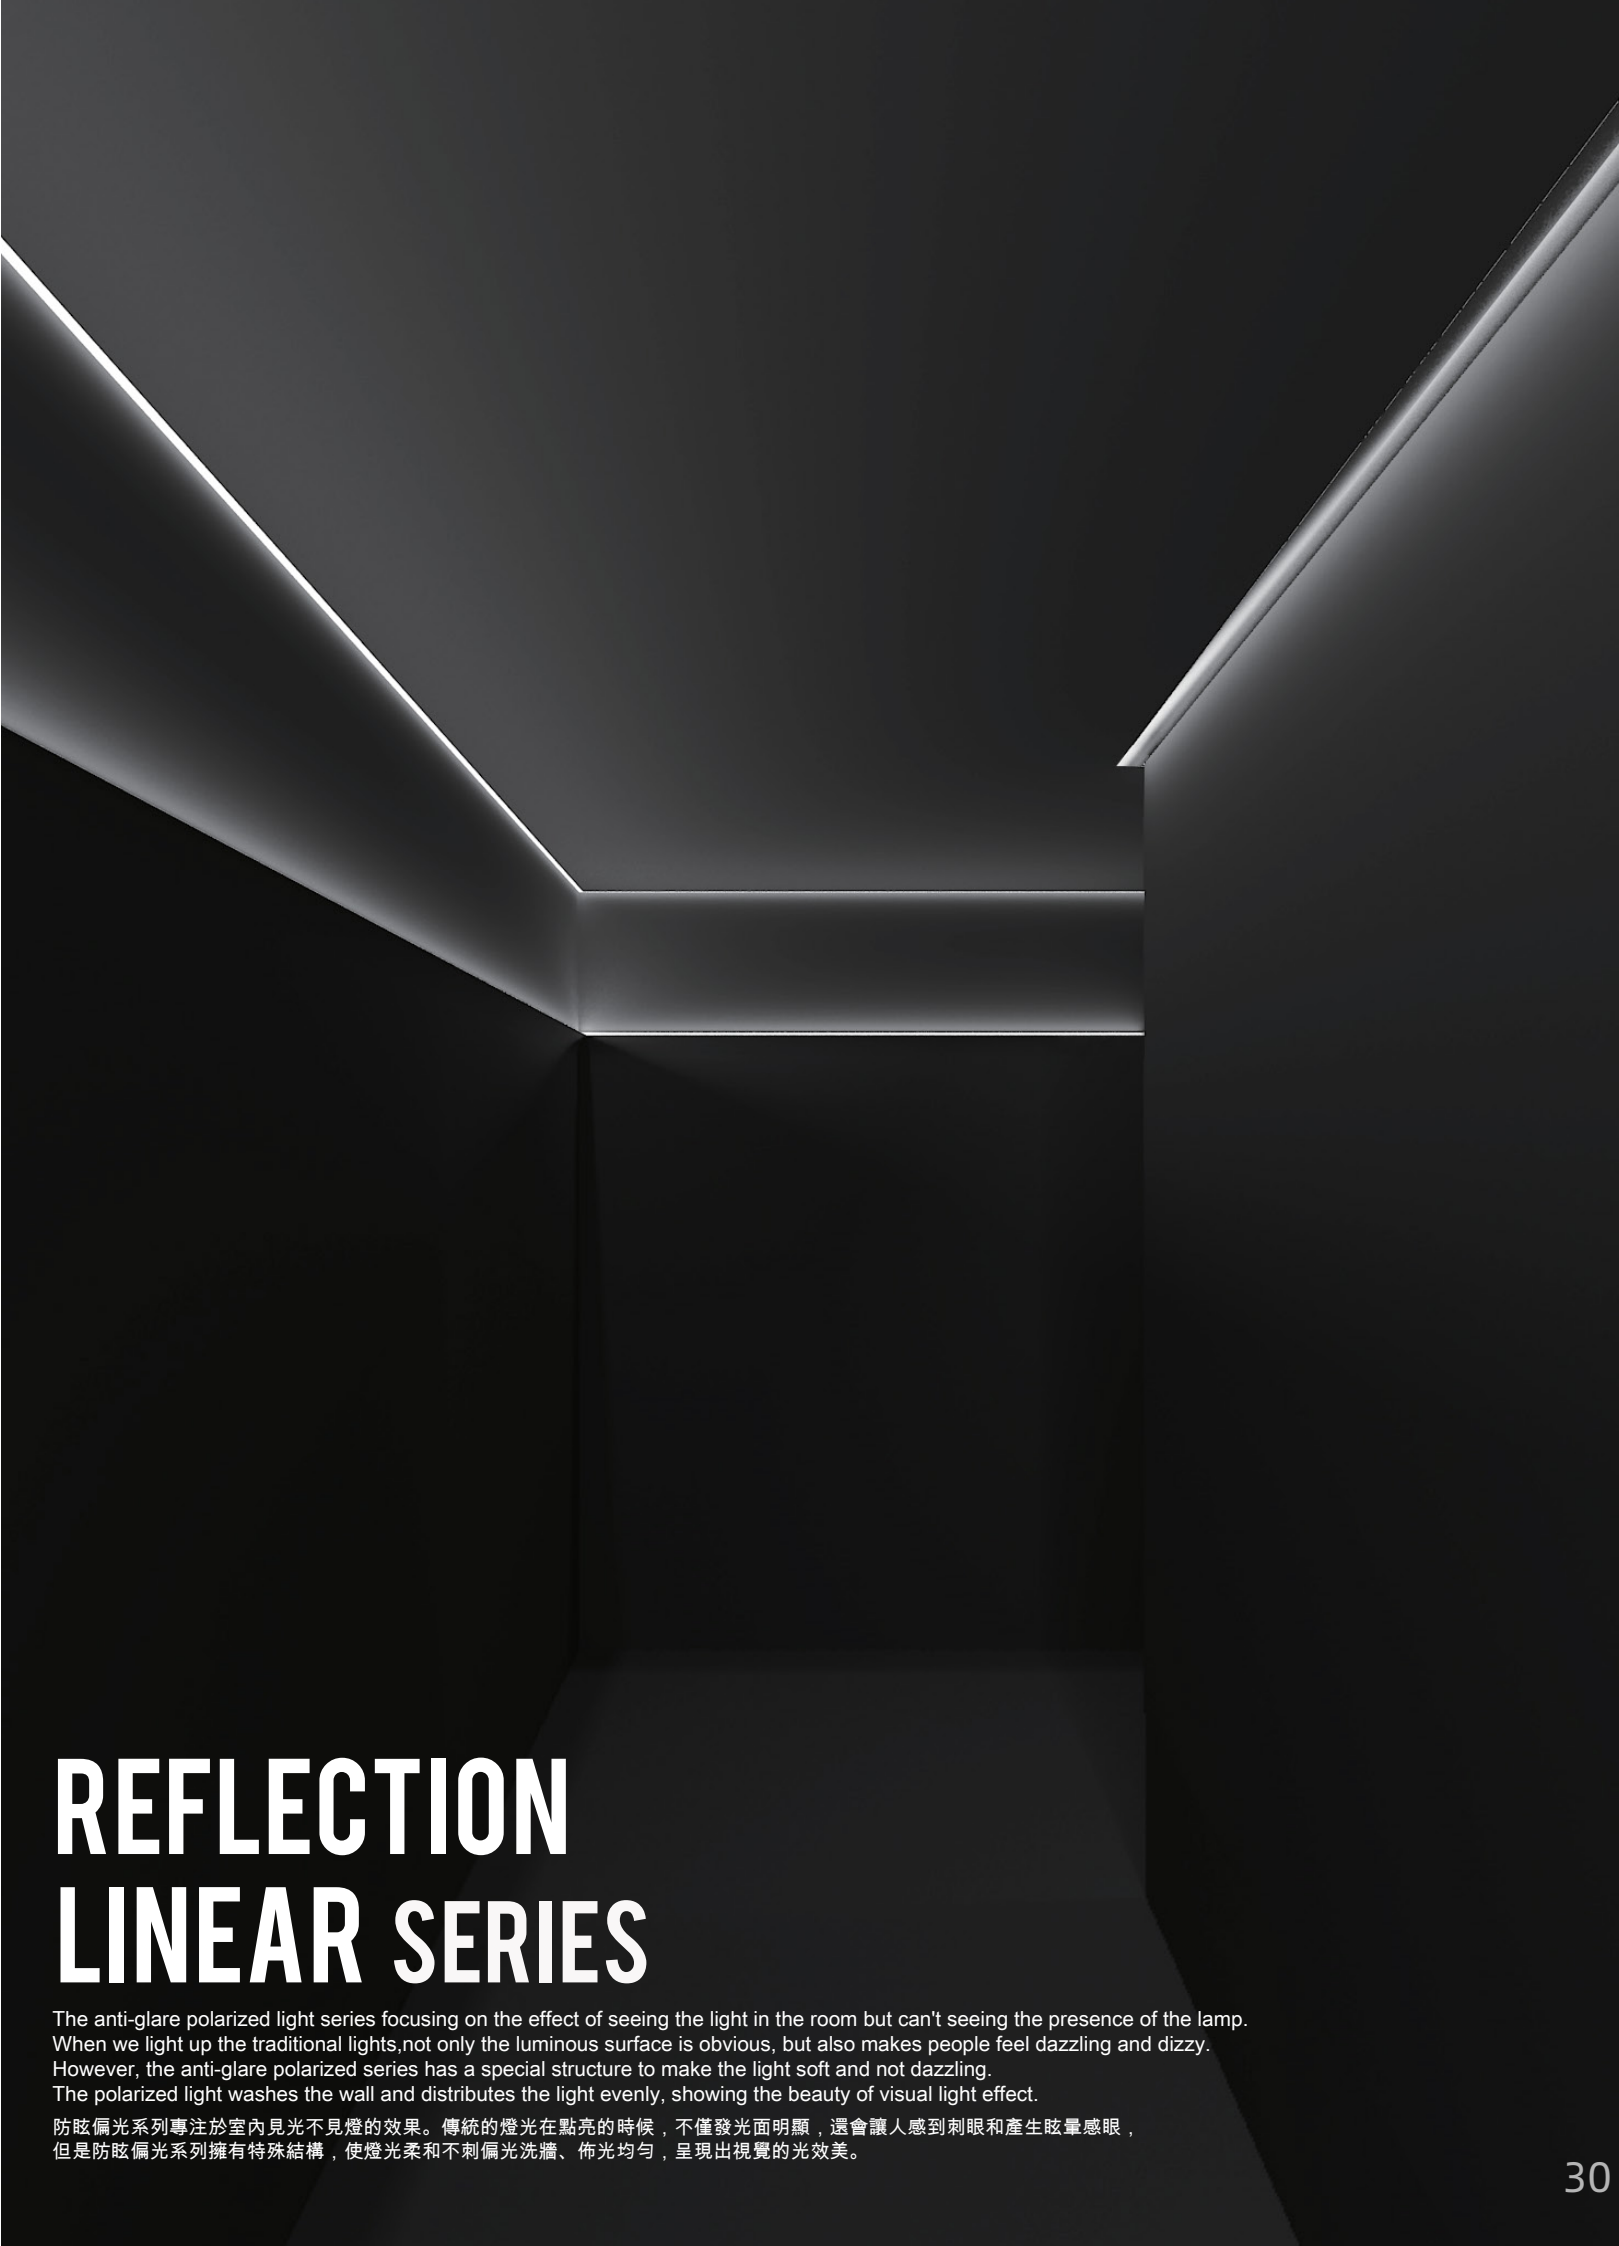


REFLECTION LINEAR SERIES

The anti-glare polarized light series focusing on the effect of seeing the light in the room but can't seeing the presence of the lamp. When we light up the traditional lights,not only the luminous surface is obvious, but also makes people feel dazzling and dizzy. However, the anti-glare polarized series has a special structure to make the light soft and not dazzling. The polarized light washes the wall and distributes the light evenly, showing the beauty of visual light effect.

防眩偏光系列專注於室內見光不見燈的效果。傳統的燈光在點亮的時候，不僅發光面明顯，還會讓人感到刺眼和產生眩暈感，但是防眩偏光系列擁有特殊結構，使燈光柔和不刺偏光洗牆、佈光均勻，呈現出視覺的光效美。

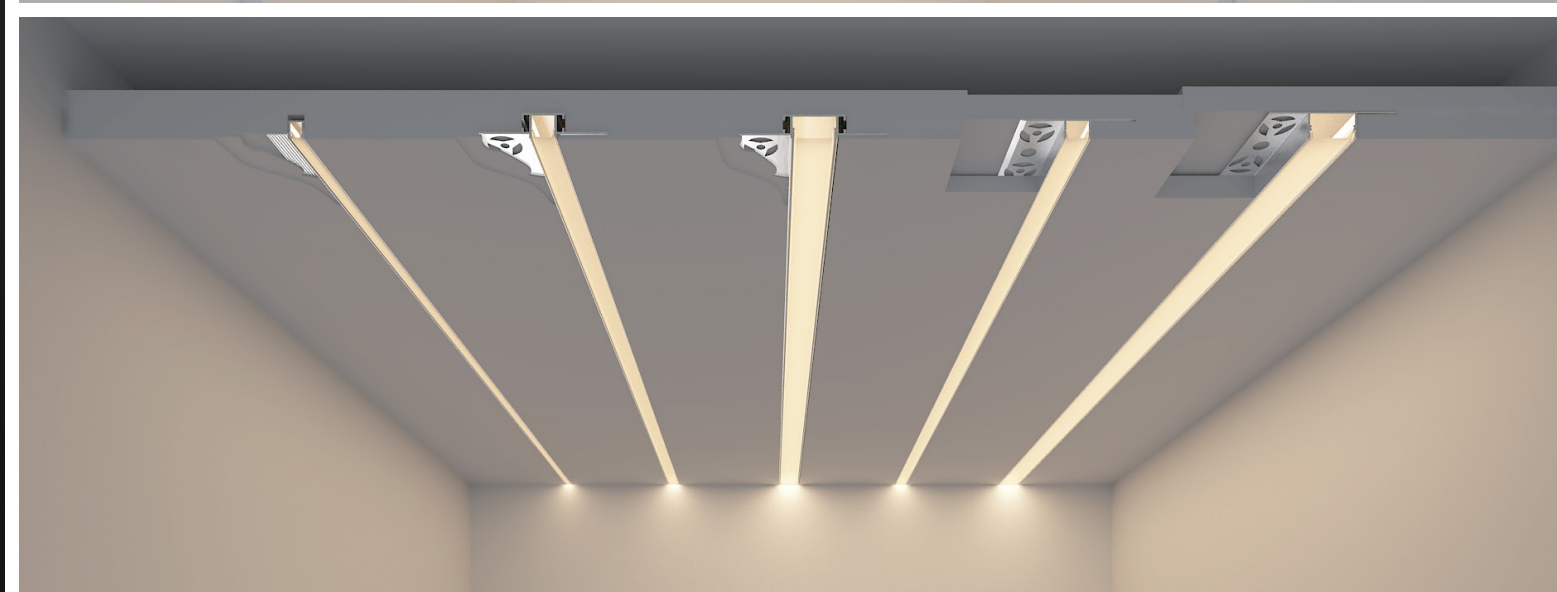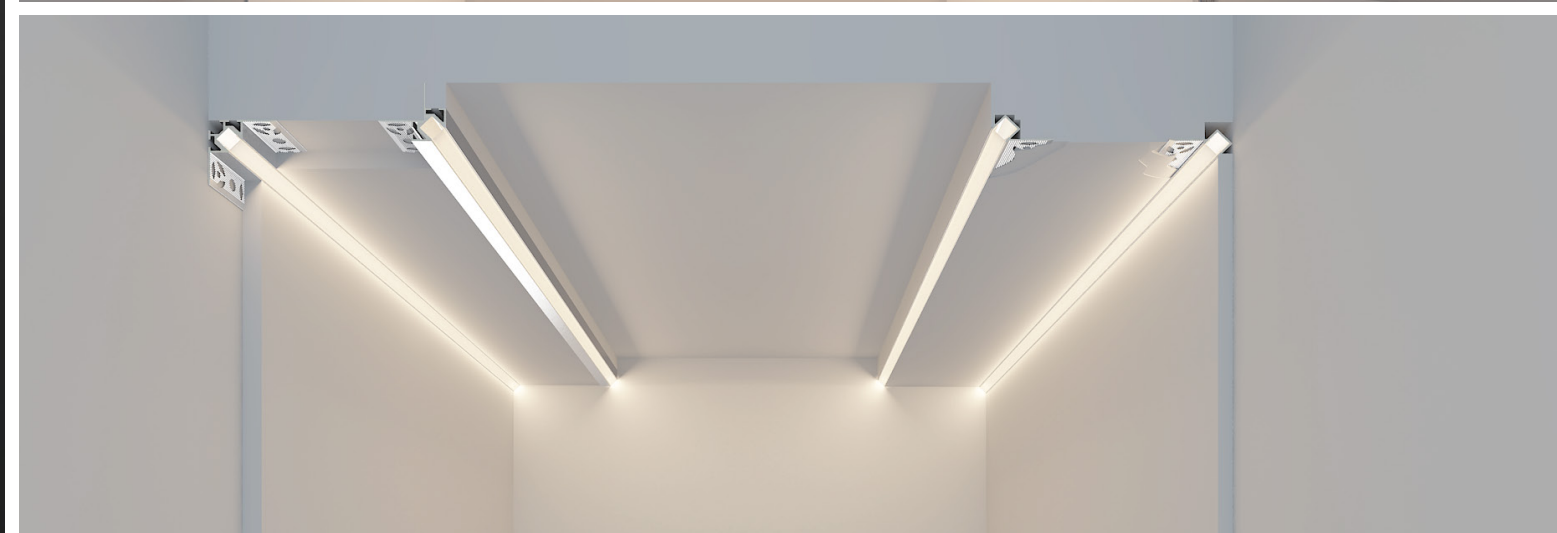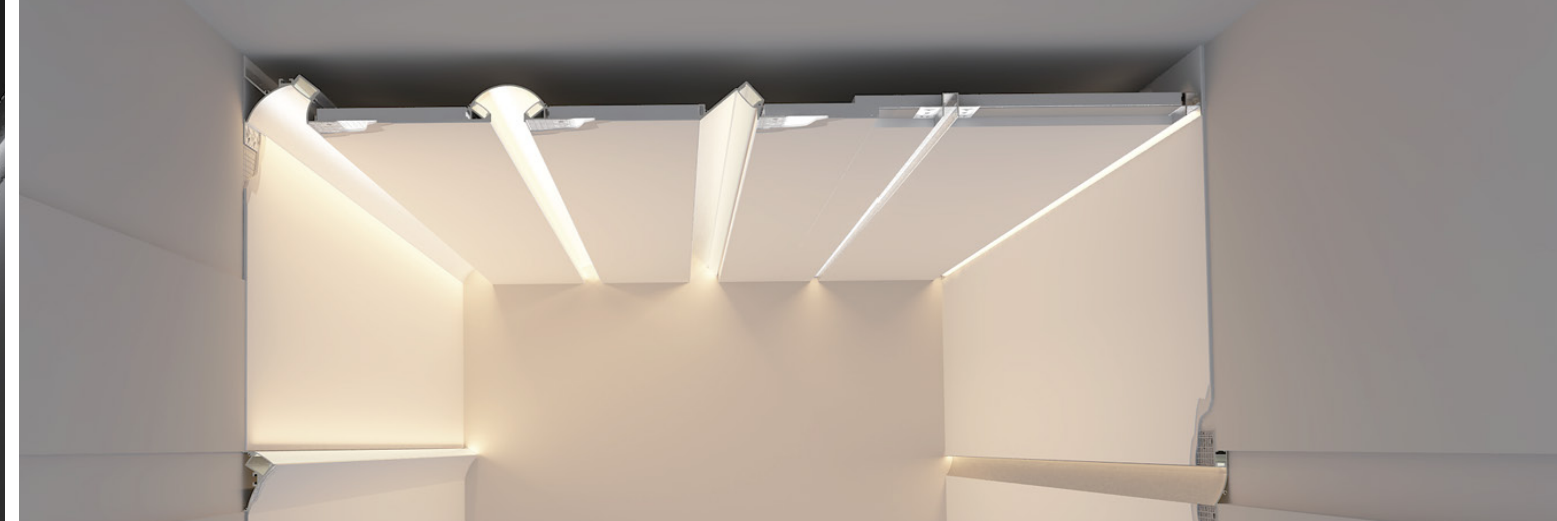


GL-QSG4118 LED線型燈

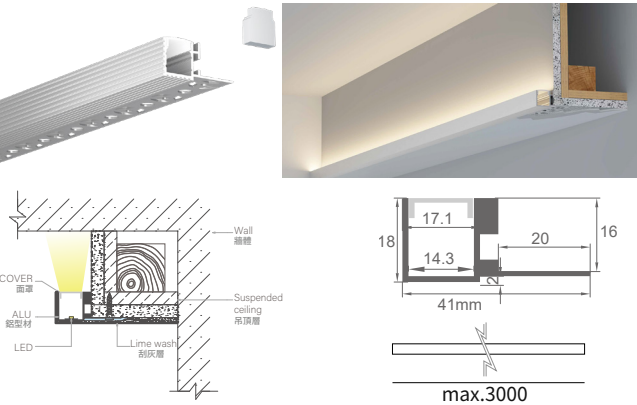


功率 Watts	14.4W / 19.2W / 20.16W / 22W (Meter)
色溫 Color temperature	3000K / 4000K / 2700K-6000K / RGB(W)
光效 Light efficiency	65lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	AI ☐ WH ☐
Available	☐ Dimmable ☐ Tunable white ☐ RGBW
ON/OFF	
TRIAC	
0-10V	
DALI	
PLC	

GL-QSG4118B LED線型燈

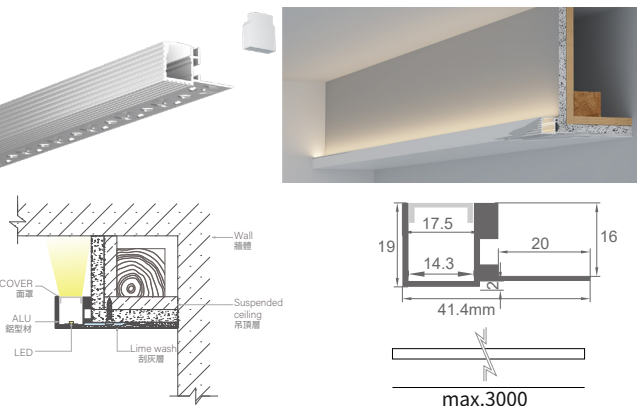


功率 Watts	14.4W / 19.2W / 20.16W / 22W (Meter)
色溫 Color temperature	3000K / 4000K / 2700K-6000K / RGB(W)
光效 Light efficiency	65lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	AI ☐ WH ☐
Available	☐ Dimmable ☐ Tunable white ☐ RGBW
ON/OFF	
TRIAC	
0-10V	
DALI	
PLC	

GL-QSG3825 LED線型燈

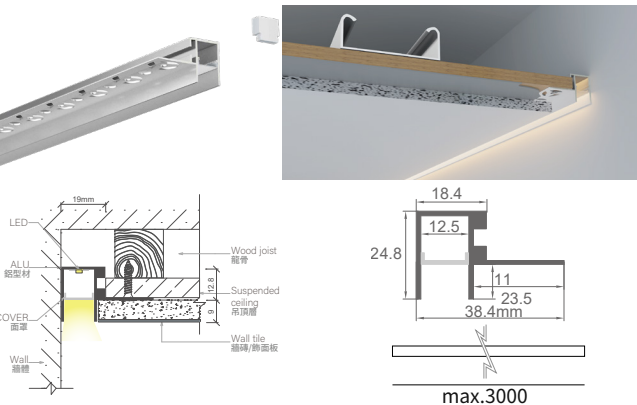


功率 Watts	14.4W / 19.2W / 20.16W / 22W (Meter)
色溫 Color temperature	3000K / 4000K / 2700K-6000K / RGB(W)
光效 Light efficiency	65lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	AI ☐ WH ☐
Available	☐ Dimmable ☐ Tunable white ☐ RGBW
ON/OFF	
TRIAC	
0-10V	
DALI	
PLC	

GL-QSG3820 LED線型燈

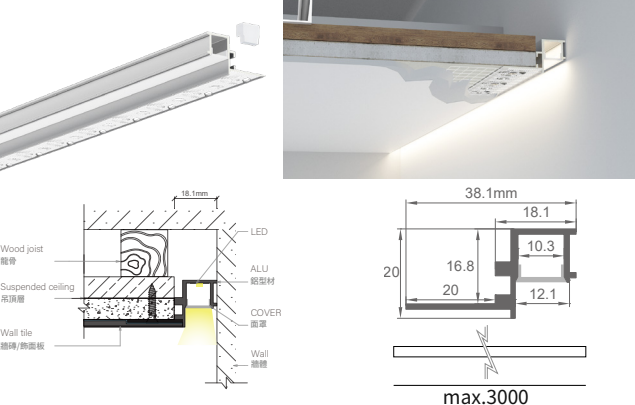


功率 Watts	9.6W / 11.52W / 14.4W (Meter)
色溫 Color temperature	3000K / 4000K / 2700K-6000K
光效 Light efficiency	65lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	AI ☐ WH ☐
Available	☐ Dimmable ☐ Tunable white ☐ RGBW
ON/OFF	
TRIAC	
0-10V	
DALI	
PLC	

GL-QSG4320 LED線型燈

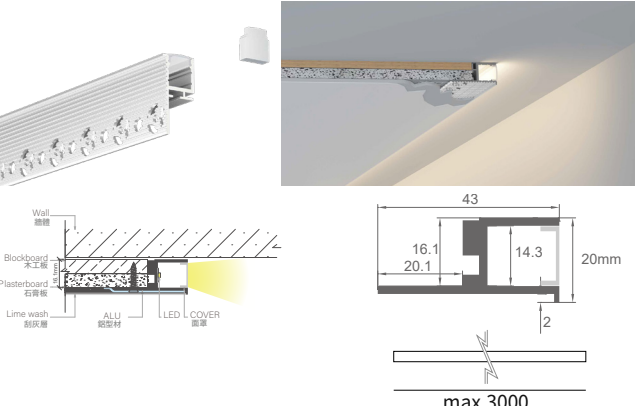


功率 Watts	14.4W / 19.2W / 20.16W / 22W (Meter)
色溫 Color temperature	3000K / 4000K / 2700K-6000K / RGB(W)
光效 Light efficiency	65lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	AI ☐ WH ☐
Available	☐ Dimmable ☐ Tunable white ☐ RGBW
ON/OFF	
TRIAC	
0-10V	
DALI	
PLC	

GL-QSG8556 LED線型燈

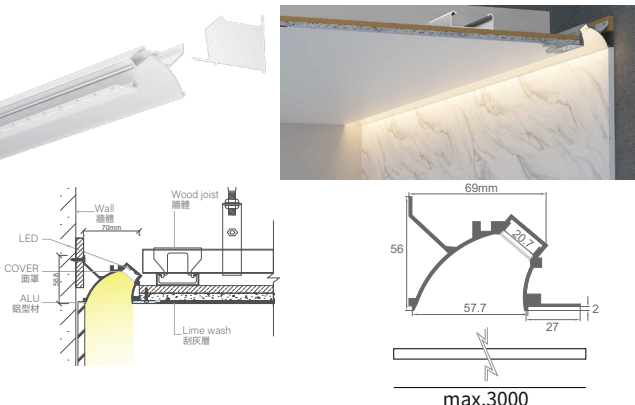


功率 Watts	14.4W / 19.2W / 20.16W / 22W / 33.3W (Meter)
色溫 Color temperature	3000K / 4000K / 2700K-6000K / RGB(W)
光效 Light efficiency	65lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	AI ☐ WH ☐
Available	☐ Dimmable ☐ Tunable white ☐ RGBW
ON/OFF	
TRIAC	
0-10V	
DALI	
PLC	

GL-QSG8556B LED線型燈

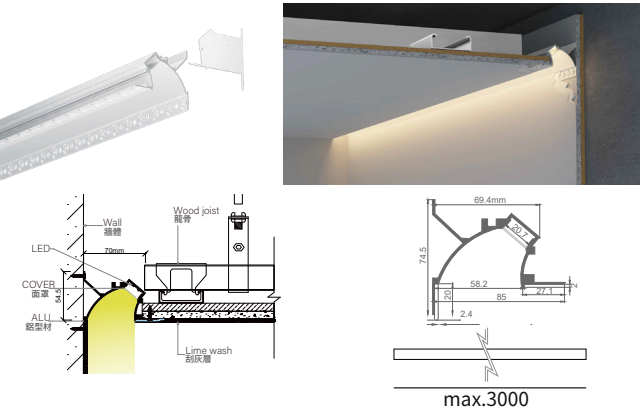


功率 Watts	14.4W / 19.2W / 20.16W / 22W / 33.3W (Meter)
色溫 Color temperature	3000K / 4000K / 2700K-6000K / RGB(W)
光效 Light efficiency	65lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	AI ☐ WH ☐
Available	☐ Dimmable ☐ Tunable white ☐ RGBW
ON/OFF	
TRIAC	
0-10V	
DALI	
PLC	

GL-QSG2655 LED線型燈

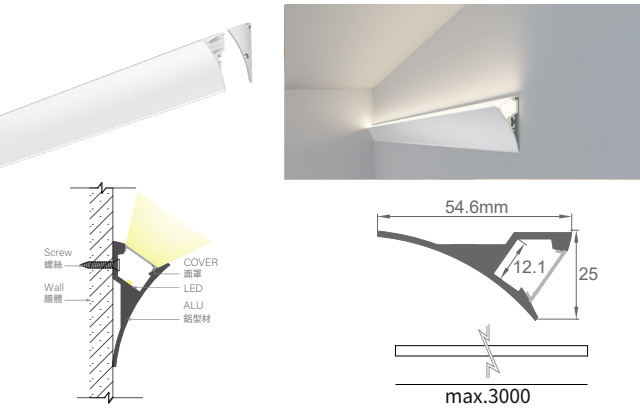


功率 Watts	14.4W / 19.2W / 20.16W / 22W (Meter)
色溫 Color temperature	3000K / 4000K / 2700K-6000K / RGB(W)
光效 Light efficiency	65lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	AI ☐ WH ☐
Available	☐ Dimmable ☐ Tunable white ☐ RGBW
ON/OFF	
TRIAC	
0-10V	
DALI	
PLC	

GL-QSG2696 LED線型燈

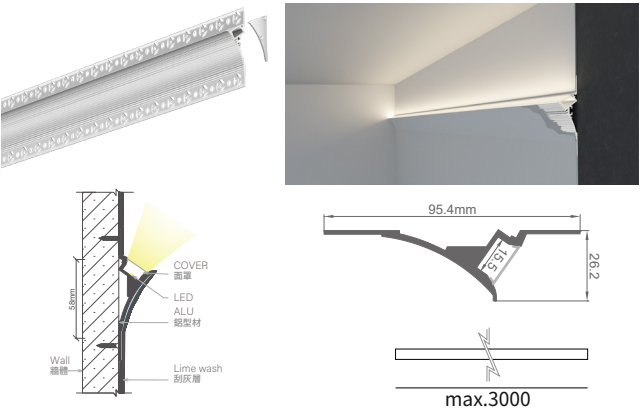


功率 Watts	14.4W / 19.2W / 20.16W / 22W (Meter)
色溫 Color temperature	3000K / 4000K / 2700K-6000K / RGB(W)
光效 Light efficiency	65lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	AI ☐ WH ☐
Available	☐ Dimmable ☐ Tunable white ☐ RGBW
ON/OFF	
TRIAC	
0-10V	
DALI	
PLC	

GL-QSG10037 LED線型燈

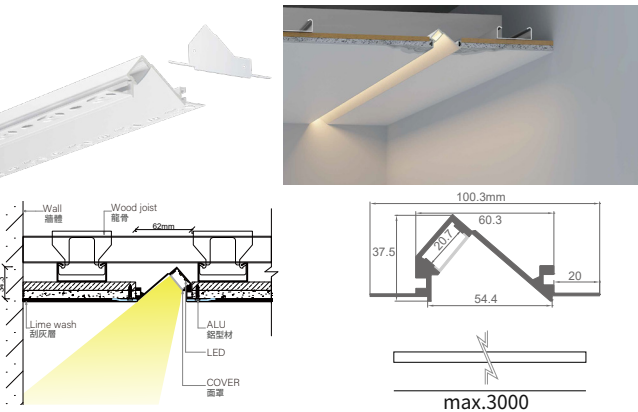


功率 Watts	14.4W / 19.2W / 20.16W / 22W (Meter)
色溫 Color temperature	3000K / 4000K / 2700K-6000K / RGB(W)
光效 Light efficiency	65lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	AI ☐ WH ☐
Available	☐ Dimmable ☐ Tunable white ☐ RGBW
ON/OFF	
TRIAC	
0-10V	
DALI	
PLC	

GL-QSG11637 LED線型燈

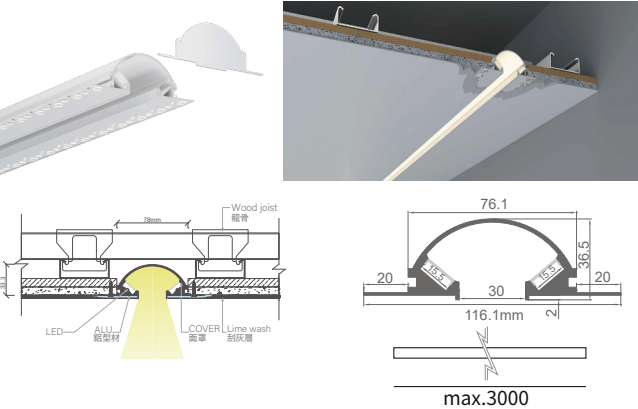


功率 Watts	14.4W*2 / 19.2W*2 / 20.16W*2 / 22W*2 (Meter)
色溫 Color temperature	3000K / 4000K / 2700K-6000 / RGB(W)K
光效 Light efficiency	65lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	AI ☐ WH ☐
Available	☐ Dimmable ☐ Tunable white ☐ RGBW
ON/OFF	
TRIAC	
0-10V	
DALI	
PLC	

GL-QSG3596 LED線型燈

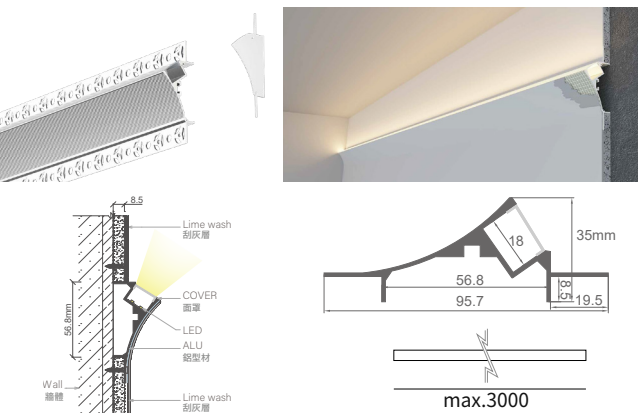


功率 Watts	14.4W / 19.2W / 20.16W / 22W (Meter)
色溫 Color temperature	3000K / 4000K / 2700K-6000K / RGB(W)
光效 Light efficiency	65lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	AI ☐ WH ☐
Available	☐ Dimmable ☐ Tunable white ☐ RGBW
ON/OFF	
TRIAC	
0-10V	
DALI	
PLC	

GL-QSG3212B LED線型燈

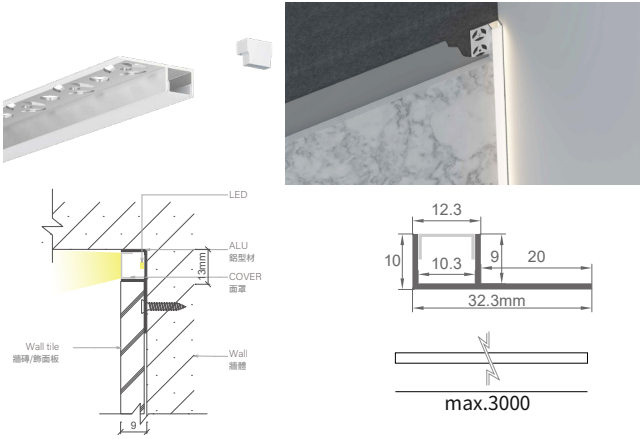


功率 Watts	5W / 9.6W / 10W / 11.52W / 14.4W (Meter)
色溫 Color temperature	3000K / 4000K / 2700K-6000K
光效 Light efficiency	65lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	AI ☐ WH ☐
Available	☐ Dimmable ☐ Tunable white
ON/OFF	TRIAC
0-10V	DALI
PLC	

GL-QSG9214 LED線型燈

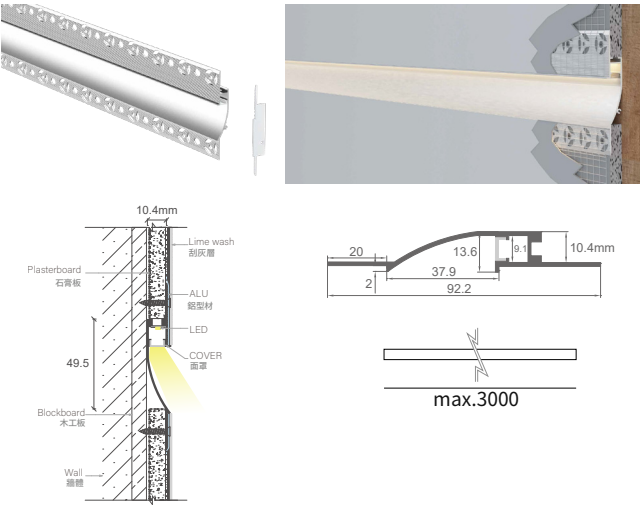


功率 Watts	5W / 9.6W / 10W / 11.52W / 14.4W (Meter)
色溫 Color temperature	3000K / 4000K / 2700K-6000K
光效 Light efficiency	65lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DV12V
顏色 Color	AI ☐ WH ☐
Available	☐ Dimmable ☐ Tunable white
ON/OFF	TRIAC
0-10V	DALI
PLC	

GL-QSG12055-2525C LED線型燈

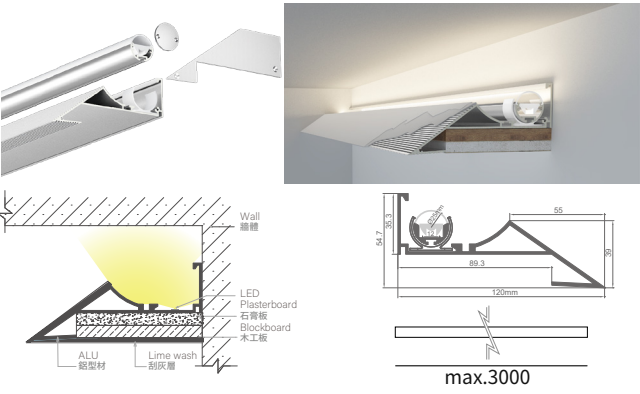

功率 Watts	14.4W / 19.2W / 20.16W / 22W (Meter)
色溫 Color temperature	3000K / 4000K / 2700K-6000K / RGB(W)
光效 Light efficiency	65lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	AI ☐ WH ☐
Available	☐ Dimmable ☐ Tunable white ☐ RGBW
ON/OFF	TRIAC
0-10V	DALI
PLC	


GL-QSG7058 LED線型燈

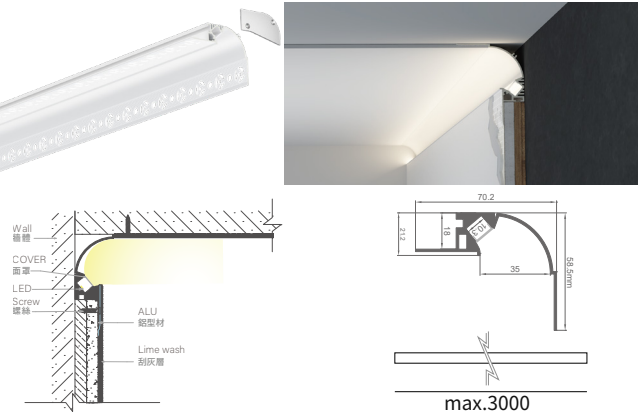

功率 Watts	5W / 9.6W / 10W / 11.52W / 14.4W (Meter)
色溫 Color temperature	3000K / 4000K / 2700K-6000K
光效 Light efficiency	65lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	AI ☐ WH ☐
Available	☐ Dimmable ☐ Tunable white
ON/OFF	TRIAC
0-10V	DALI
PLC	



HIGH VOLTAGE

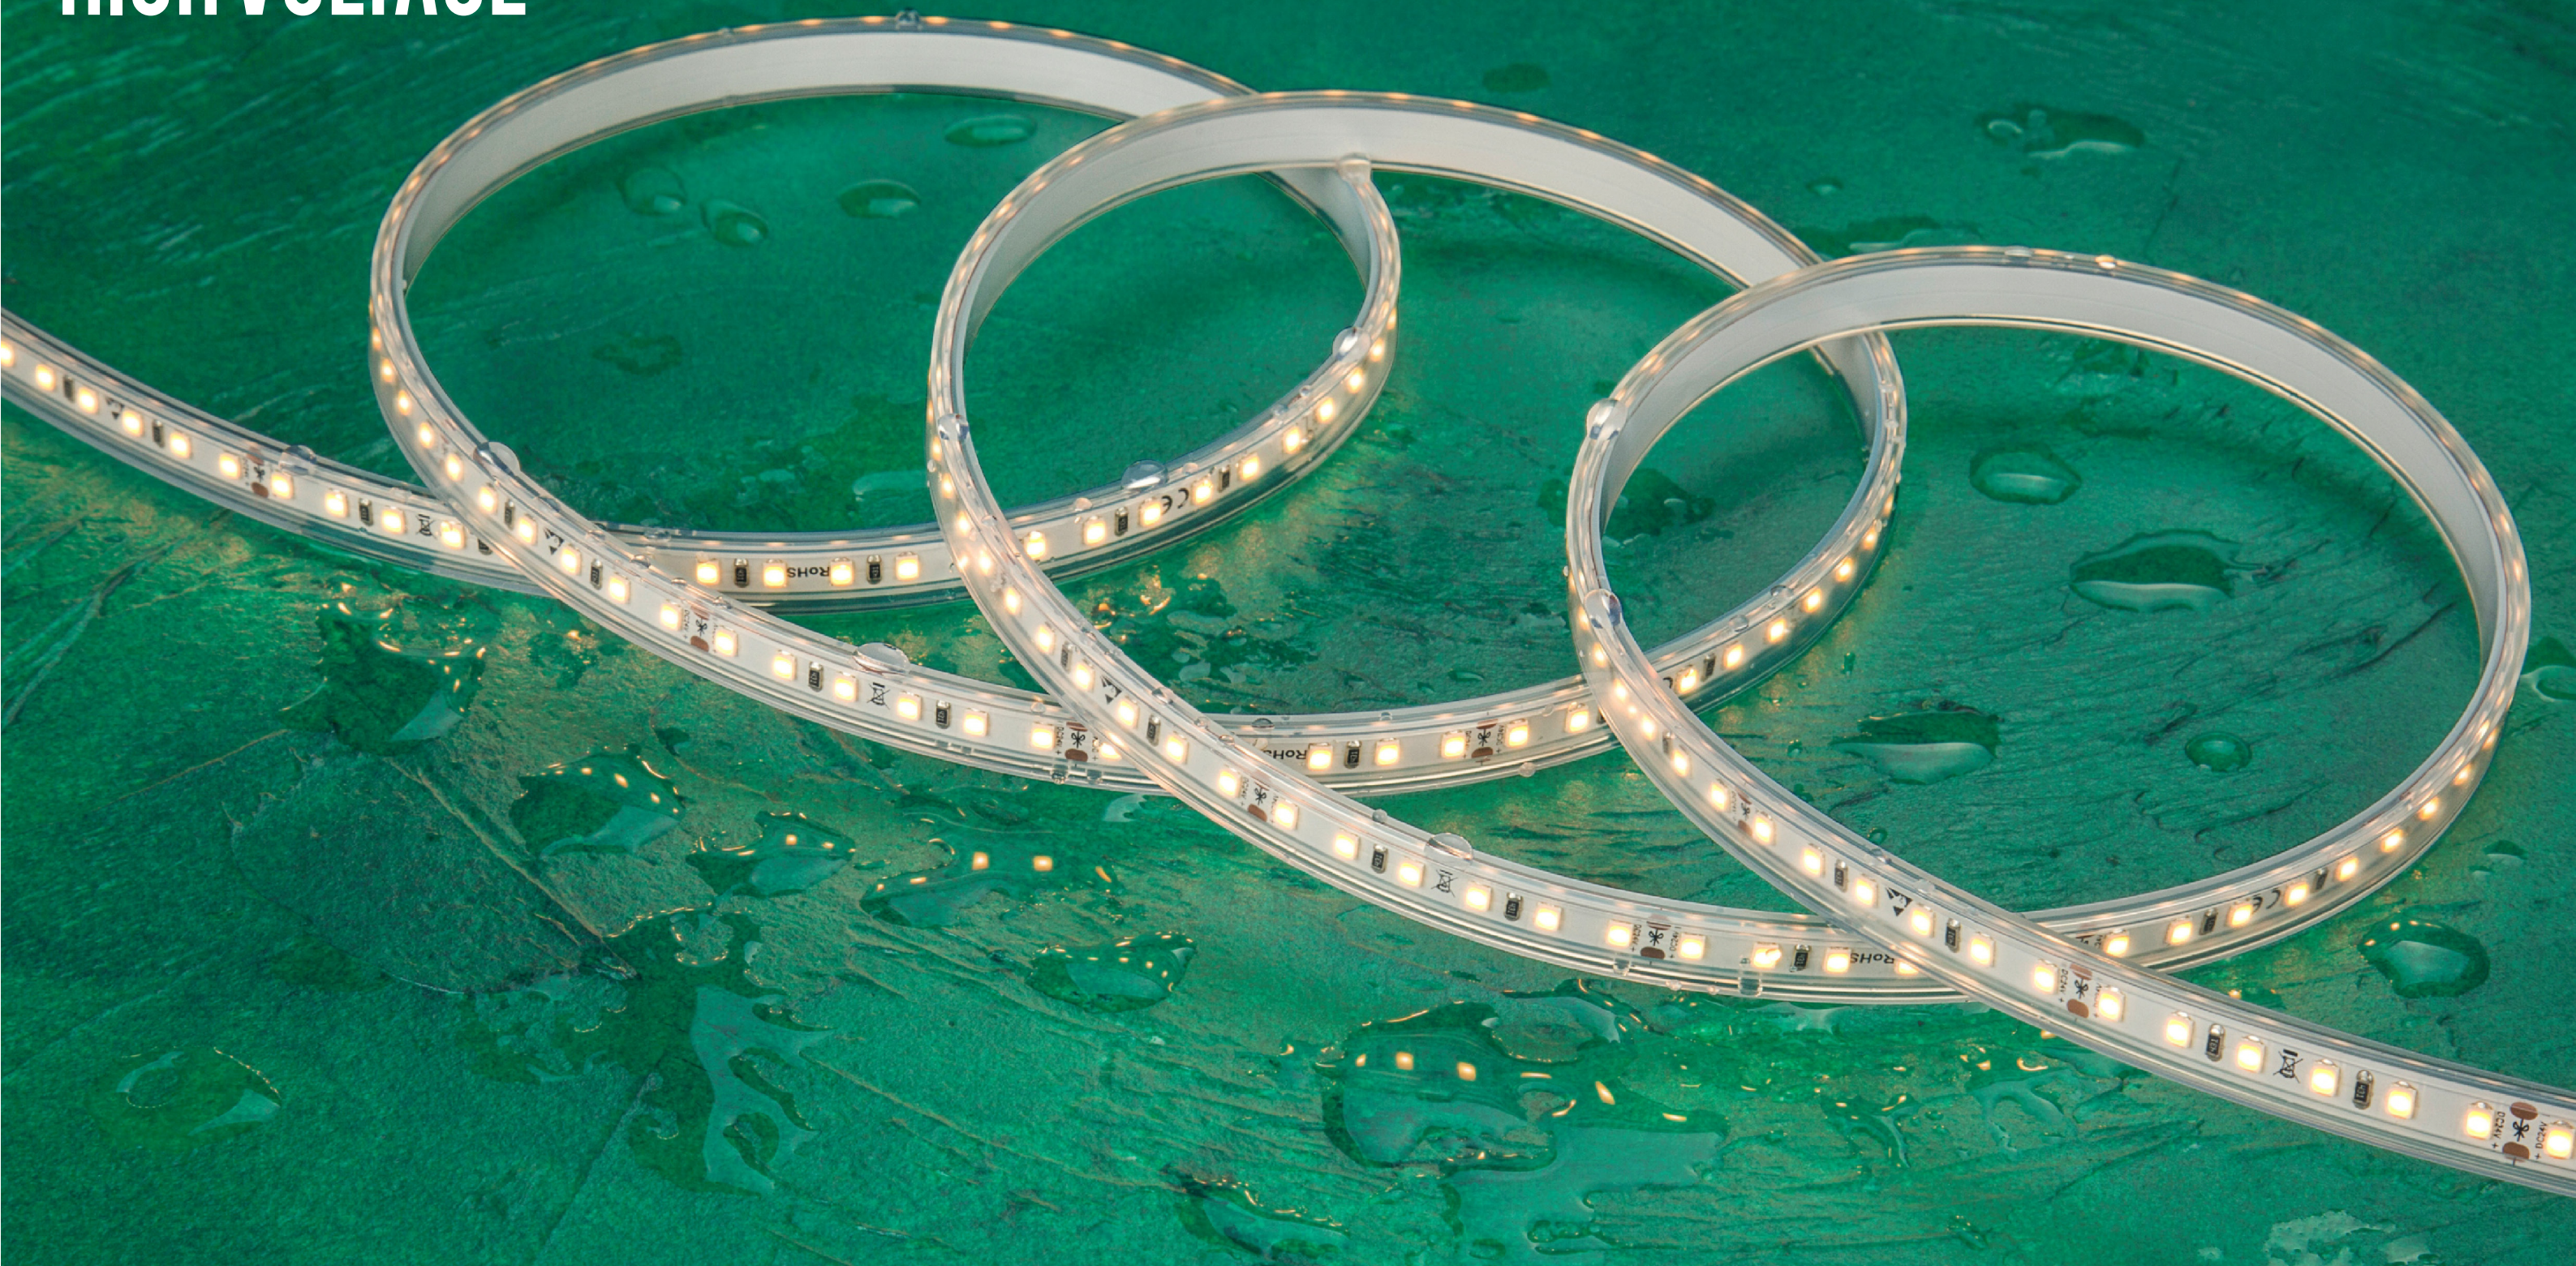

ADVANTAGE





(over temperature protection)consistent current from the head to the tail (過溫保護) 頭尾電流一致

IC 高品質高壓線性IC，恆定LED工作電流

High luminous quality,same brightness from the head to the tail.
高效流明質量，首尾亮度一致



Extrusion hollow molding technology , inside arc and outside square structure, strong pressure resistance.
擠壓中空成型技術，內圓弧外方結構，抗壓能力強
UV resistance, uniform light emission, high temperture resistance , yellowing resistance , good heat dissipation,flame retardant and good flexibility
抗紫外線、發光均勻、耐高溫、耐黃變、散熱性好、阻燃、柔韌性好



VDE rubber cablew with safety cartificate , double insulation much safer, integrated waterproof design.
VDE 橡膠電纜帶安全盒，雙重絕緣更安全，一體化防水設計




GL-SW-COB-110V(IP65)

LED高壓燈帶



功率 Watts	12W (Meter)
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	93.2lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥80
電壓 Voltage	AC 110V
顏色 Color	N/A
Available ON/OFF	IP65
CE CB IP 65	

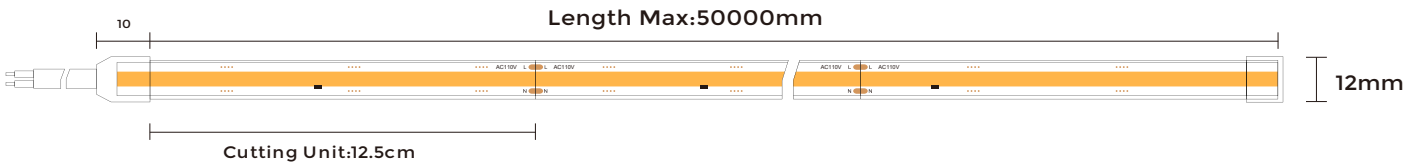


GL-SW-COB-220V(IP65)

LED高壓燈帶



功率 Watts	12W (Meter)
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	93.2lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥80
電壓 Voltage	AC 220V
顏色 Color	N/A
Available ON/OFF	IP65
CE CB IP 65	

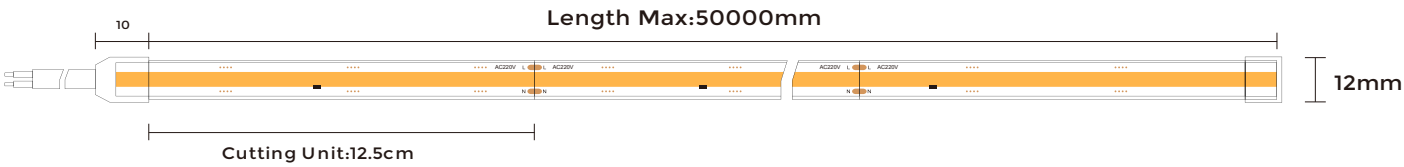


GL-SW-2835W60-110V(IP67)

LED擠出型高壓燈帶



功率 Watts	10W (Meter)
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	93.2lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	AC 110V
顏色 Color	N/A
Available ON/OFF	IP67
CE CB IP 67	

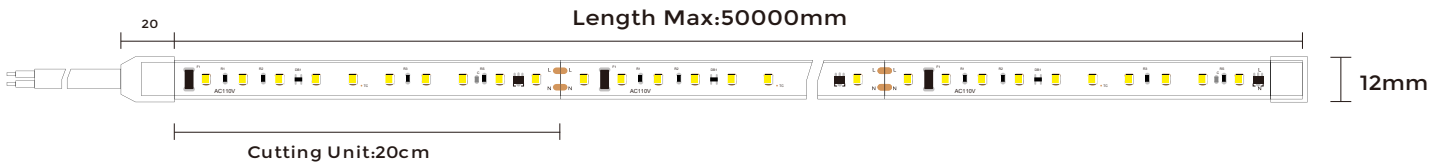


GL-SW-2835W60-230V(IP67)

LED高壓燈帶



功率 Watts	10W (Meter)
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	93.2lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	AC 220V
顏色 Color	N/A
Available ON/OFF	IP67
CE CB IP 67	

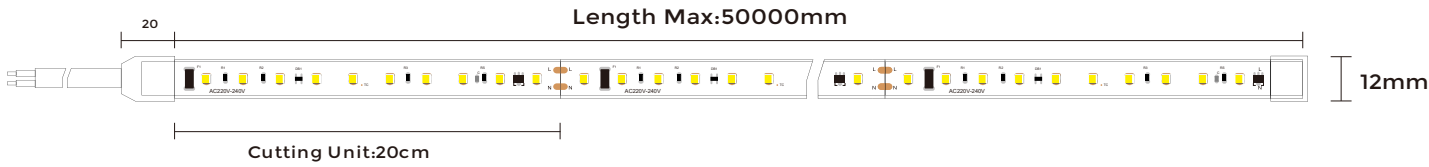

LEDSTRIPS

The adoption of American CREE chip, which already passed relevant certification department test and reached the international standards. Adopting automatic assembly line and high standard production process to complete assembly. Providing different powers, color temperature to meet customer needs. IP20, IP65 protection range is available. Passed CE, ROHS, CCC and other certifications. 採用美國CREE芯片，已通過相關認證部門測試，達到國際標準。採用自動化流水線和高標準生產工藝完成組裝。提供不同功率、色溫以滿足客戶需求。可選擇IP20、IP65的防水防塵範圍。通過了CE、ROHS、CCC等認證。





WIRE

Available to customize the wire with one end or dual ends



CRI

Available to customize the CRI range



PRINT

Available to customize the content and print on the FPC



LENGTH

Available to customize the length within the maximum supporting range



COLOR


Available to customize the color



IP


Available to customize the IP Rating

GL-2835-125L-5MM LED裸板一燈一剪燈帶




功率 Watts	5W / 9.6W (Meter)
色溫 Color temperature	2700K / 3000K / 3500K / 4000K / 5000K
光效 Light efficiency	90lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	N/A
Available	ON/OFF TRIAC 0-10V DALI PLC Dimmable IP20 IP65 CE CB IP20 IP65

GL-SW2835-120L-8MM LED裸板燈帶




功率 Watts	14.4W (Meter)
色溫 Color temperature	2700K / 3000K / 3500K / 4000K / 5000K
光效 Light efficiency	80lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	N/A
Available	ON/OFF TRIAC 0-10V DALI PLC Dimmable IP20 IP65 CE CB IP20 IP65

GL-SW2835-224L-10MM LED裸板燈帶




功率 Watts	20.16W (Meter)
色溫 Color temperature	3000K / 3500K / 4000K / 5000K
光效 Light efficiency	150lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	N/A
Available	ON/OFF TRIAC 0-10V DALI PLC Dimmable IP20 CE CB IP20

GL-SW2835-320L-24MM LED裸板燈帶




功率 Watts	33.3W(Meter)
色溫 Color temperature	2700K / 3000K / 3500K / 4000K / 5000K
光效 Light efficiency	130lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	N/A
Available	ON/OFF TRIAC 0-10V DALI PLC Dimmable IP20 CE CB IP20

GL-2835-60L-8MM LED 3D裸板燈帶



功率 Watts	11.52W (Meter)
色溫 Color temperature	2700K / 3000K / 3500K / 4000K / 5000K
光效 Light efficiency	74.7lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	D24V
顏色 Color	N/A
Available	ON/OFF TRIAC 0-10V DALI PLC Dimmable IP20 CE CB IP20

GL-SW-COB-400-5MM-24V LED COB裸板燈帶





功率 Watts	10W (Meter)
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	60lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	D24V
顏色 Color	N/A
Available	ON/OFF TRIAC 0-10V DALI PLC Dimmable IP20 CE CB IP20



GL-SW5050-60L-RGB

LED裸板燈帶 (RGB)



功率 Watts	14.4W (Meter)
色溫 Color temperature	RGB
光效 Light efficiency	N/A
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V / DC12V(OPTIONS)
顏色 Color	N/A

Available

ON/OFF

DMX

DALI

PLC

Dimmable

RGB

IP20

IP65

CE


CB

IP20

IP65

GL-SW3838-240L-RGBW

LED裸板燈帶(RGBW)



功率 Watts	19.2W (Meter)
色溫 Color temperature	RGBW (W:3000K/4000K/6000K)(OPTIONS)
光效 Light efficiency	N/A
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	N/A

Available

ON/OFF

DMX

DALI

PLC

Dimmable

RGBW

IP20

IP65

CE


CB

IP20

IP65

GL-CH2216-280L-5MM-24V

LED雙色溫裸板燈帶



功率 Watts	9.6W (Meter)
色溫 Color temperature	2700K-6000K
光效 Light efficiency	N/A
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	N/A

Available

ON/OFF

0-10V

DALI

PLC

Dimmable

Tunable white

IP20

IP65

CE


CB

IP20

IP65

GL-SW2216-CTA240-10MM

LED雙色溫裸板燈帶



功率 Watts	22W (Meter)
色溫 Color temperature	2700K-6000K
光效 Light efficiency	70lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	N/A

Available

ON/OFF

0-10V

DALI

PLC

Dimmable

Tunable white

IP20

IP65

CE

CB

IP20



IP65

38

Unconventional specifications, please consult the seller first
非常規規格產品請先與賣家溝通



GL-SW-NFT1212 LED正發光無影燈一體擠出型



功率 Watts	12W (Meter)
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	50lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	WH□

Available

ON/OFF

TRIAC

0-10V

DALI

PLC

Dimmable



CE

CB

IP 65

UGR<19

GL-SW-NFS1212 LED側發光無影燈一體擠出型



功率 Watts	12W (Meter)
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	50lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	WH□

Available

ON/OFF

TRIAC

0-10V

DALI

PLC

Dimmable




CE

CB

IP 65

UGR<19

GL-SW-NFT1616 LED正發光無影燈一體擠出型



功率 Watts	15W (Meter)
色溫 Color temperature	RGBW (3000K/4000K) / 2700K-5000K
光效 Light efficiency	50lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	WH□

Available

ON/OFF

TRIAC

0-10V

DALI

PLC

Dimmable

Tunable white

RGBW



CE

CB

IP 65

UGR<19

GL-SW-NFS1616 LED側發光無影燈一體擠出型



功率 Watts	15W (Meter)
色溫 Color temperature	RGBW (3000K/4000K) / 2700K-5000K
光效 Light efficiency	50lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	WH□

Available

ON/OFF

TRIAC

0-10V

DALI

PLC

Dimmable

Tunable white

RGBW



CE

CB

IP 65

UGR<19

GL-SW-NF3D1616B LED3D款無影燈一體擠出型 *正、側共用



功率 Watts	12W (Meter)
色溫 Color temperature	3000K / 3500K / 4000K
光效 Light efficiency	50lm/W
角度 Beam angle	110°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	WH□

Available

ON/OFF

TRIAC

0-10V

DALI

PLC

Dimmable

CE

CB

IP 65

UGR<19



BARRISOL SERIES


The biggest advantage is that there is no need to consider the distance between the light strips and cause problems such as dark areas.

The minimum depth of the light source and the barrisol is only 8cm to meet the uniform effect.

最大優勢是無需考慮燈帶之間的距離而造成暗區等問題。光源與拉膜的最小深度僅需8cm即可滿足均勻效果。

GL-SW120

LED單色溫軟模組



功率 Watts	10W
色溫 Color temperature	3000K / 3500K / 4000K
光效 Light efficiency	1040lm/PCS
角度 Beam angle	N/A
顯指 Color rendering index	≥90
電壓 Voltage	DC24V (需配置變壓器DRIVER REQUIRED)
顏色 Color	N/A

Available

ON/OFF

TRIAC

0-10V

DALI

PLC

Dimmable

CCC


CE

CB

IP 20

GL-SW576CTA

LED雙色溫軟模組



功率 Watts	15W
色溫 Color temperature	2700K-6000K
光效 Light efficiency	1453lm/PCS
角度 Beam angle	N/A
顯指 Color rendering index	≥90
電壓 Voltage	DC24V (需配置變壓器DRIVER REQUIRED)
顏色 Color	N/A

Available

ON/OFF

0-10V

DALI

PLC

Dimmable

Tunable white

CCC


CE

CB

IP 20

GL-SW162RGB

LED RGB軟模組



功率 Watts	18W
色溫 Color temperature	RGB
光效 Light efficiency	N/A
角度 Beam angle	N/A
顯指 Color rendering index	≥90
電壓 Voltage	DC24V (需配置變壓器DRIVER REQUIRED)
顏色 Color	N/A

Available

ON/OFF

DMX

DALI

PLC

Dimmable

RGB

CCC


CE

CB

IP 20

GL-SW162RGBW

LED RGBW軟模組



功率 Watts	24W
色溫 Color temperature	RGBW (W:3000K/4000/6000K (OPTIONS))
光效 Light efficiency	N/A
角度 Beam angle	N/A
顯指 Color rendering index	≥90
電壓 Voltage	DC24V (需配置變壓器DRIVER REQUIRED)
顏色 Color	N/A

Available

ON/OFF

DMX

DALI

PLC

Dimmable

RGB

CCC

CE

CB

IP 20


Installation
It can be installed on smooth and curved surface.



Cutttable
It's cuttable basing on the cutting line. Please ture off the power when cutting.



Welding and splicing
Easy welding and splicing with fast one - touch connector, helpful for construction.






安裝
它可以安裝在光滑和彎曲的表面上



可裁剪
它可以根據切割線進行切割，裁剪時請關閉電源。




焊接和拼接
快速一鍵式輕鬆焊接和拼接連接器，有利於施工。

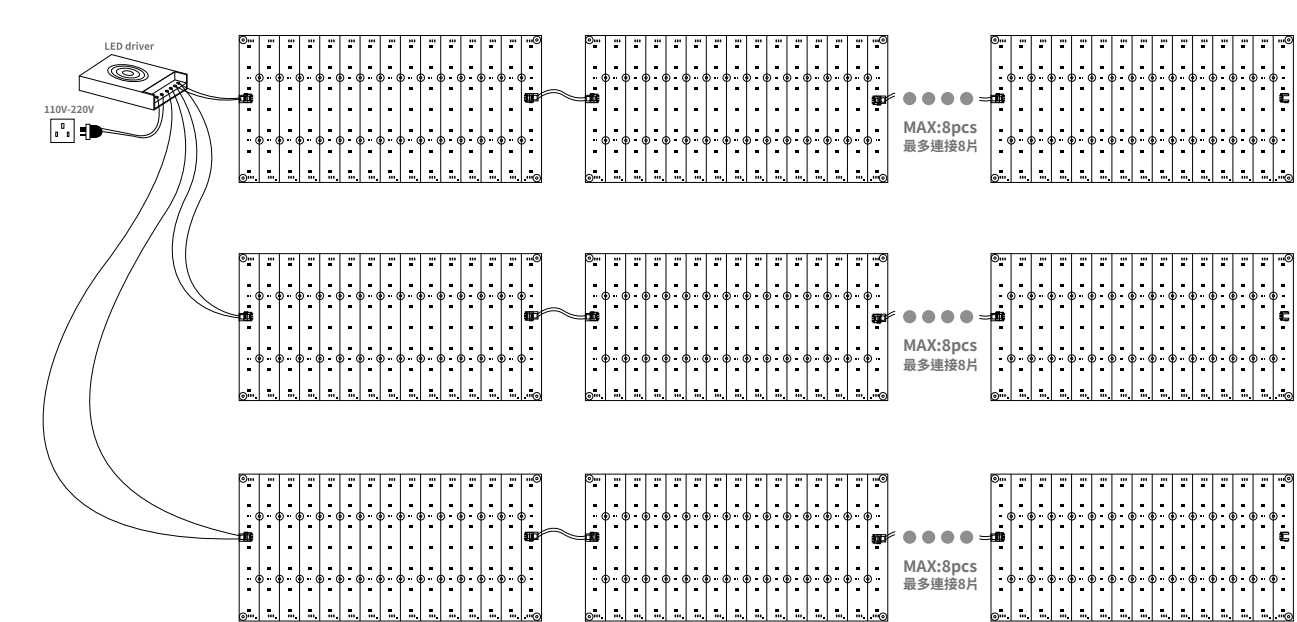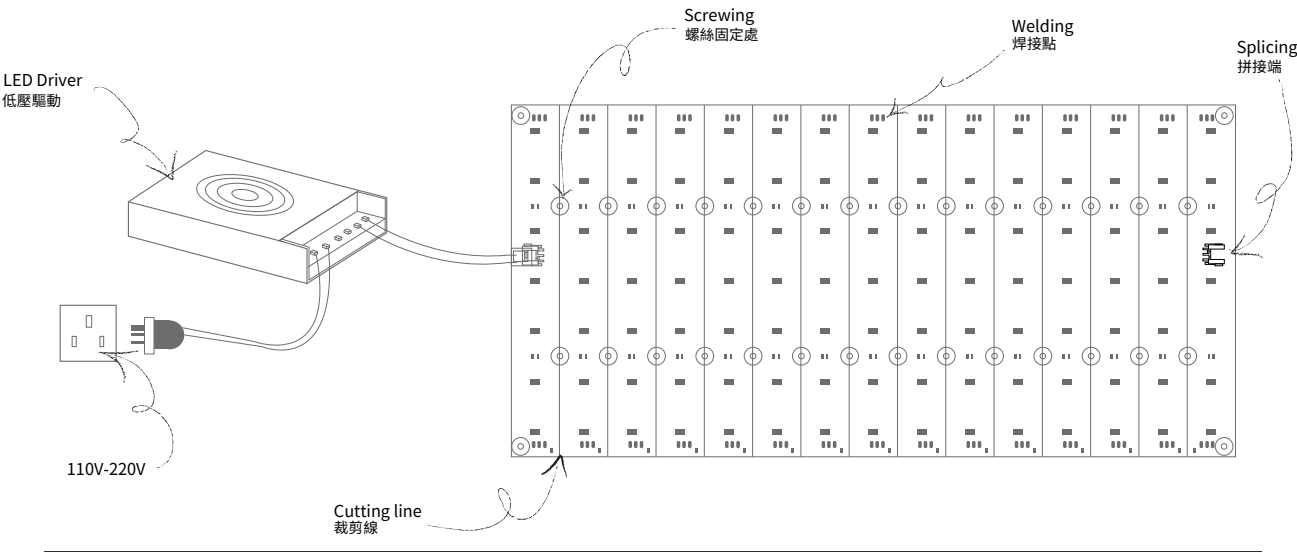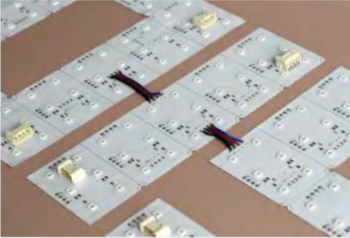



PANEL DOWNLIGHT SERIES


GL-JL-KMTH600X600 LED直下式面板燈

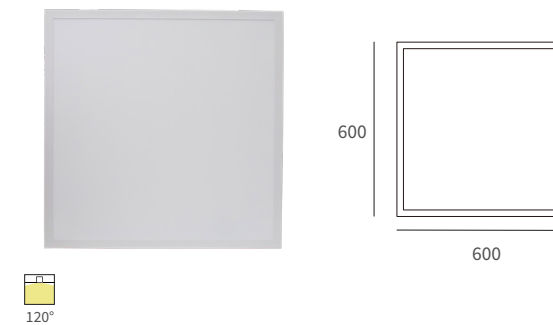

功率 Watts	40W (Meter)
色溫 Color temperature	4000K/6000K
光效 Light efficiency	150lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥80
電壓 Voltage	AC 100/277V
顏色 Color	White
Available	PLC



GL-JL-KMTH600X1200 LED直下式面板燈

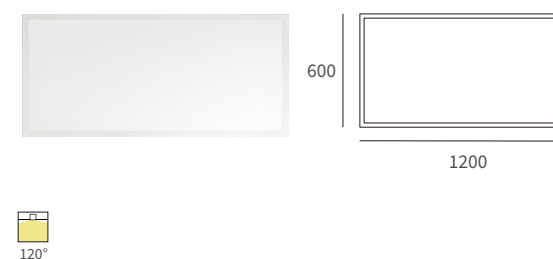


功率 Watts	48W (Meter)
色溫 Color temperature	4000K/6000K
光效 Light efficiency	150lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥80
電壓 Voltage	AC 100/277V
顏色 Color	White
Available	PLC



Unconventional specifications, please consult the seller first
非常規規格產品請先與賣家溝通




GL-PLC LED雙色溫直下式面板燈600*600

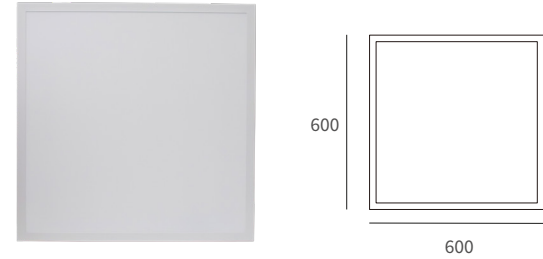


功率 Watts	40W (Meter)
色溫 Color temperature	2700K - 6500K
光效 Light efficiency	150lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥80
電壓 Voltage	AC 110/220V
顏色 Color	White
Available PLC	

GL-PLC LED雙色溫直下式面板燈600*1200

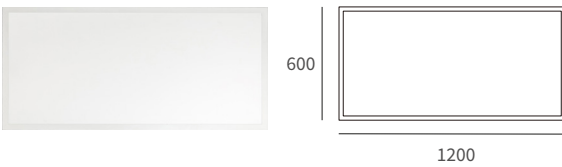


功率 Watts	72W (Meter)
色溫 Color temperature	2700K - 6500K
光效 Light efficiency	150lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥80
電壓 Voltage	AC 100-277V
顏色 Color	White
Available PLC	

GL-PLC 800W LED雙色溫平板燈壁切開關面板

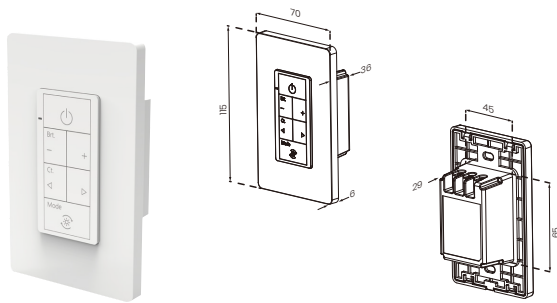

功率 Watts	800W (Meter)
色溫 Color temperature	2700K - 6500K
光效 Light efficiency	150lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥80
電壓 Voltage	AC 120V(Max:800W) - 277V(Max:1600W)
顏色 Color	White
Available PLC	

INSTALLING SWITCH 安裝方式

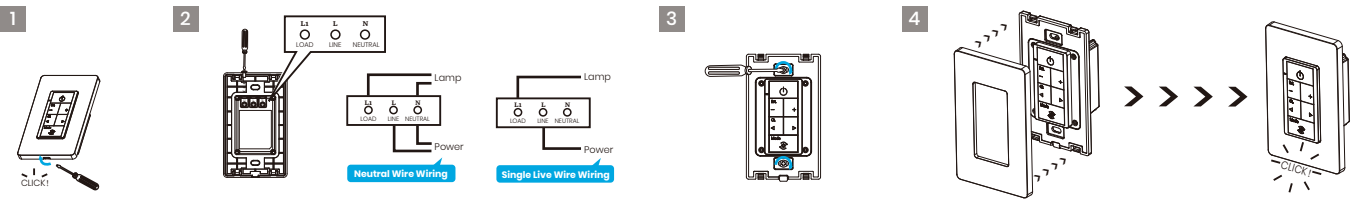


1 Open the front cover with a small flat head screwdriver.
使用小型平頭螺絲起子打開前蓋。

2 Connect the wire to the terminals as needed and tighten the screws.
It is necessary to connect all wires to the appropriate connectors.
根據需要將電線連接到端子，並擰緊螺絲。必須將所有電線連接到相應的接頭上。

3 Fix the switch chassis to the mounting bracket or box using
supplied screws as shown after wire connected.
在電線連接完成後，使用隨附的螺絲將開關底座固定在安裝支架或安裝盒上。

4 Reattach the face plate securely.
將面板重新牢固地安裝回去。


GL-PLC 1100W LED雙色溫平板燈壁切開關面板

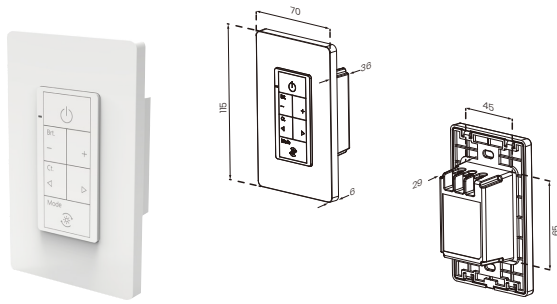


功率 Watts	1100W (Meter)
色溫 Color temperature	2700K - 6500K
光效 Light efficiency	150lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥80
電壓 Voltage	AC 120V(Max:1100W) - 277V(Max:2200W)
顏色 Color	White
Available PLC	

Unconventional specifications, please consult the seller first
非常規規格產品請先與賣家溝通

POT SERIES

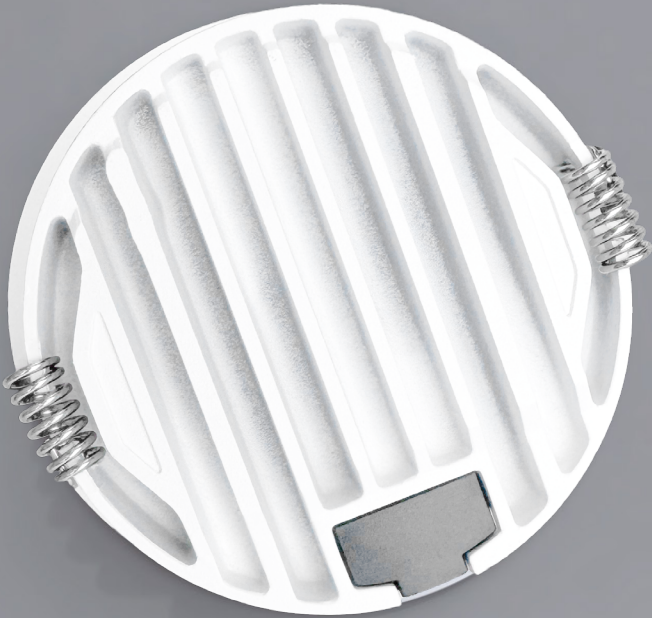


GL-NS-TM75 LED嵌入式防眩筒燈

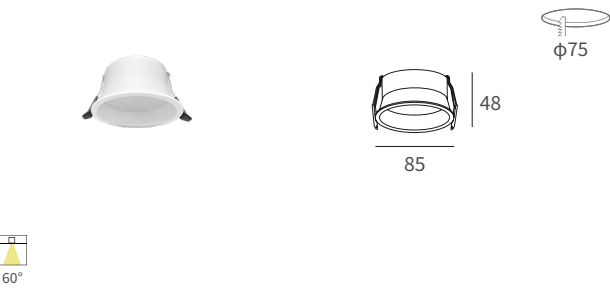

功率 Watts	8W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	55lm/W
角度 Beam angle	60°
顯指 Color rendering index	≥90
電壓 Voltage	AC110V-220V
顏色 Color	White
Available	☐ Dimmable
ON/OFF	
TRIAC	
0-10V	
DALI	
PLC	

CCCCECBIP20


GL-NS-TM95 LED嵌入式防眩筒燈

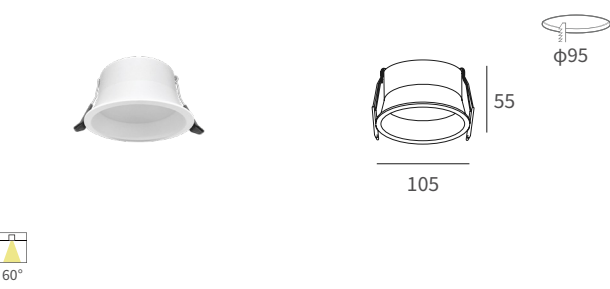

功率 Watts	12W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	55lm/W
角度 Beam angle	60°
顯指 Color rendering index	≥90
電壓 Voltage	AC110V-220V
顏色 Color	White
Available	☐ Dimmable
ON/OFF	
TRIAC	
0-10V	
DALI	
PLC	

CCCCECBIP20


GL-NS-TM125 LED嵌入式防眩筒燈

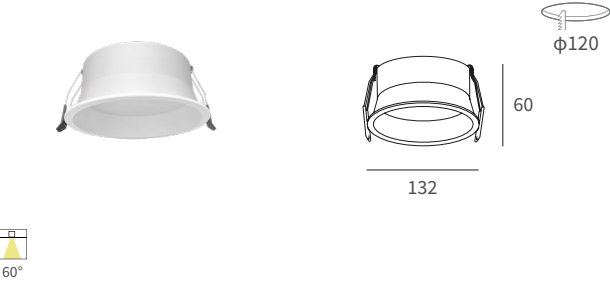

功率 Watts	20W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	55lm/W
角度 Beam angle	60°
顯指 Color rendering index	≥90
電壓 Voltage	AC110V-220V
顏色 Color	White
Available	☐ Dimmable
ON/OFF	
TRIAC	
0-10V	
DALI	
PLC	

CCCCECBIP20

GL-NS-TM150 LED嵌入式防眩筒燈

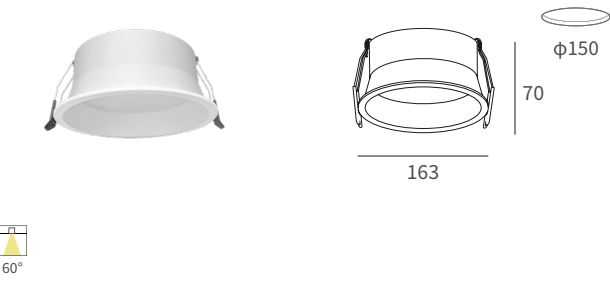

功率 Watts	30W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	55lm/W
角度 Beam angle	60°
顯指 Color rendering index	≥90
電壓 Voltage	AC110V-220V
顏色 Color	White
Available	☐ Dimmable
ON/OFF	
TRIAC	
0-10V	
DALI	
PLC	

CCCCECBIP20


SPOT SERIES



GL-XW1306

LED嵌入式射燈

-W:白色 -B:黑色




功率 Watts	7W / 9W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	80lm/W
角度 Beam angle	15° / 24° / 38°
顯指 Color rendering index	≥90
電壓 Voltage	AC110V-220V
顏色 Color	White / Black

Available						
ON/OFF						
TRIAC						
0-10V						
DALI						
PLC						

GL-XW1395T

LED嵌入式射燈

-W:白色 -B:黑色



功率 Watts	9W / 12W / 15W / 18W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	80lm/W
角度 Beam angle	15° / 24° / 36°
顯指 Color rendering index	≥90
電壓 Voltage	AC110V-220V
顏色 Color	White / Black

Available						
ON/OFF						
TRIAC						
0-10V						
DALI						
PLC						

Accessories(option)/Decorative reflector(selection) 配件(選配)/裝飾反光杯(選擇)					
					
honeycomb mesh 蜂紋絲網罩	bright black 亮黑	bright silver 亮銀	ivory white 象牙白	space black 太空黑	rose gold 玫瑰金

Unconventional specifications, please consult the seller first
非常規規格產品請先與賣家溝通



TORNADOLIGHT SERIES

Family design, accessories diversification, to meet different lighting needs, omni-directional lighting services, suitable for Villa level, commercial restaurants, hotels, pavilions and other applications.


龍捲風·天花射燈系列，家族化設計，配件多樣化，滿足不同的照明需求，全方位燈光服務，適用於別墅平層、商業餐廳、酒店、展館等多種應用領域。



GL-XJE23055A

LED有邊框嵌入式可調節射燈

-W:白色 -B:黑色

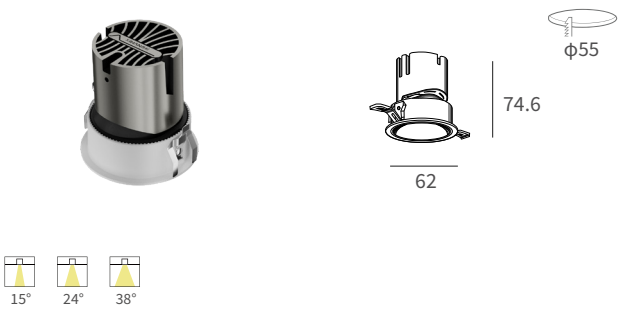


功率 Watts	7W / 9W
色溫 Color temperature	2700k / 3000K / 3500k / 4000K / 2700K-6000K
光效 Light efficiency	65lm/W
角度 Beam angle	15° / 24° / 38°
顯指 Color rendering index	≥95
電壓 Voltage	AC110V-220V
顏色 Color	White / Black
Available	☐ Dimmable ☐ Tunable white
ON/OFF	☐ TRIAC ☐ 0-10V ☐ DALI ☐ PLC
Decorative reflector(selection) 裝飾反光杯(選擇)	☐ bright black 珍珠黑 ☐ white 雪白 ☐ black 亮黑 ☐ bright silver 銀鏡

GL-XJE23075A

LED有邊框嵌入式可調節射燈

-W:白色 -B:黑色

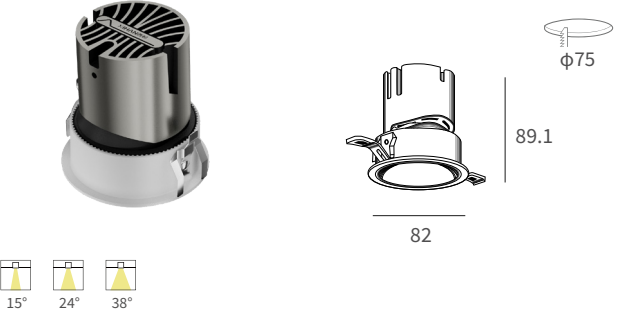


功率 Watts	9W / 12W
色溫 Color temperature	2700k / 3000K / 3500k / 4000K / 2700K-6000K
光效 Light efficiency	65lm/W
角度 Beam angle	15° / 24° / 38°
顯指 Color rendering index	≥95
電壓 Voltage	AC110V-220V
顏色 Color	White / Black
Available	☐ Dimmable ☐ Tunable white
ON/OFF	☐ TRIAC ☐ 0-10V ☐ DALI ☐ PLC
Decorative reflector(selection) 裝飾反光杯(選擇)	☐ bright black 珍珠黑 ☐ white 雪白 ☐ black 亮黑 ☐ bright silver 銀鏡

THIN SERIES

GL-SKC033103

LED薄款嵌入式射燈



功率 Watts	3W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	51lm/W
角度 Beam angle	24°
顯指 Color rendering index	≥90
電壓 Voltage	AC110V / AC220V
顏色 Color	White



Available
ON/OFF
TRIAC
0-10V
DALI
PLC



GL-XW-DZSD37

LED薄款嵌入式射燈

-W:白色 -B:黑色



功率 Watts	7W / 9W
色溫 Color temperature	3000K / 4000K / 2700K-6000K
光效 Light efficiency	85lm/W
角度 Beam angle	15° / 24° / 36°
顯指 Color rendering index	≥90
電壓 Voltage	AC110V / AC220V
顏色 Color	White / Black


Available
ON/OFF
TRIAC
0-10V
DALI
PLC



GL-XW-DZSD37N


LED薄款嵌入式射燈

-W:白色 -B:黑色




功率 Watts	12W
色溫 Color temperature	3000K / 4000K / 2700K-6000K
光效 Light efficiency	85lm/W
角度 Beam angle	15° / 24° / 36°
顯指 Color rendering index	≥90
電壓 Voltage	AC110V / AC220V
顏色 Color	White / Black

Available
ON/OFF
TRIAC
0-10V
DALI
PLC



ZOOM RECESSED SPOTLIGHT

GL-WD35-ZPDB-A107 LED豌豆射燈



功率 Watts	7W
色溫 Color temperature	3000K
光效 Light efficiency	45lm/W
角度 Beam angle	8° - 45°
顯指 Color rendering index	≥90
電壓 Voltage	AC110-220V
顏色 Color	Black


Available

ON/OFF
TRIAC
0-10V
DALI
PLC



GL-WX35 LED萬向35調焦射燈

-W:白色 -B:黑色



功率 Watts	7W
色溫 Color temperature	3000K
光效 Light efficiency	70lm/W
角度 Beam angle	8° - 36°
顯指 Color rendering index	≥80
電壓 Voltage	AC110-220V
顏色 Color	White / Black


Available

ON/OFF
TRIAC
0-10V
DALI
PLC



GL-WX75-MNDB2810 LED漫反射射燈


-W:白色 -B:黑色



功率 Watts	10W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	70lm/W
角度 Beam angle	28°
顯指 Color rendering index	≥95
電壓 Voltage	AC110V-220V
顏色 Color	White / Black

Available

ON/OFF
TRIAC
0-10V
DALI
PLC




Unconventional specifications, please consult the seller first

非常規規格產品請先與賣家溝通

DOWNLIGHT
WALLWASHER

DOWNLIGHT
SPOTLIGHT SERIES

GL-ST8376-P75P LED有邊嵌入式偏光洗牆射燈

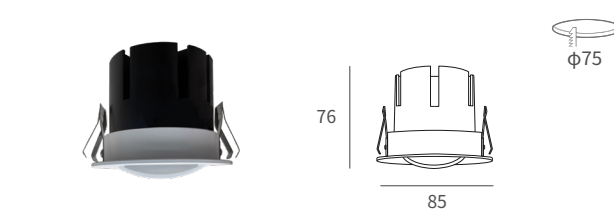




WW

功率 Watts	12W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	65lm/W
角度 Beam angle	Wallwasher
顯指 Color rendering index	≥90
電壓 Voltage	AC110V-220V
顏色 Color	White / Black
Available	☐ Dimmable
ON/OFF	
TRIAC	
0-10V	
DALI	
PLC	



GL-ST1275 LED鏡前射燈

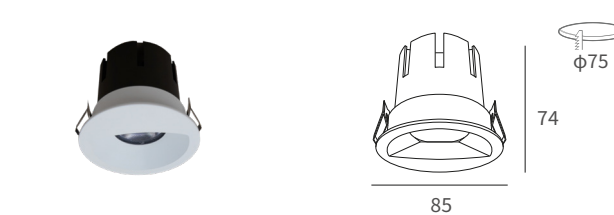




非對稱
雙偏光

功率 Watts	12W
色溫 Color temperature	3000K / 3500K / 4000K
光效 Light efficiency	79lm/W
角度 Beam angle	非對稱雙偏光
顯指 Color rendering index	≥90
電壓 Voltage	AC110V-220V
顏色 Color	White
Available	☐ Dimmable
ON/OFF	
TRIAC	
0-10V	
DALI	
PLC	



GL-ST8486-S75Q LED嵌入式射燈(金屬面環)

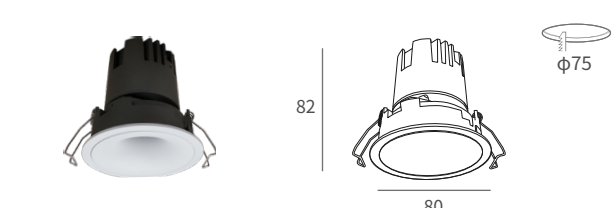



24°

功率 Watts	12W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	70lm/W
角度 Beam angle	24°
顯指 Color rendering index	≥95
電壓 Voltage	AC110-220V
顏色 Color	White
Available	☐ Dimmable
ON/OFF	
TRIAC	
0-10V	
DALI	
PLC	



Decorative reflector(selection) 裝飾反光杯(選擇)



white
白色



dark chrome
暗色



black
黑色



chrome
鉻色





GL-TZ-L55Y-1 LED有邊框嵌入式拉伸燈 -W:白色 -B:黑色

功率 Watts	7W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	75lm/W
角度 Beam angle	15° / 24° / 36°
顯指 Color rendering index	≥80
電壓 Voltage	AC110V-220V
顏色 Color	White / Black

Available
ON/OFF
TRIAC
0-10V
DALI
PLC

Dimmable

Accessories(option) 配件(選配)

Honeycomb mesh
防蚊蜂網

GL-TZ-L75Y-1 LED有邊框嵌入式拉伸燈 -W:白色 -B:黑色

功率 Watts	15W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	75lm/W
角度 Beam angle	15° / 24° / 36°
顯指 Color rendering index	≥80
電壓 Voltage	AC110V-220V
顏色 Color	White / Black

Available
ON/OFF
TRIAC
0-10V
DALI
PLC

Dimmable

Accessories(option) 配件(選配)

Honeycomb mesh
防蚊蜂網

GL-TZ-L95Y-1 LED有邊框嵌入式拉伸燈 -W:白色 -B:黑色

功率 Watts	25W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	75lm/W
角度 Beam angle	15° / 24° / 36°
顯指 Color rendering index	≥80
電壓 Voltage	AC110V-220V
顏色 Color	White / Black

Available
ON/OFF
TRIAC
0-10V
DALI
PLC

Dimmable

Accessories(option) 配件(選配)

Honeycomb mesh
防蚊蜂網




FIND SERIES

GL-XW4101

LED 有邊單頭嵌入式射燈

-W:白色 -B:黑色



功率 Watts	7W / 9W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	72lm/W
角度 Beam angle	24° / 38°
顯指 Color rendering index	≥90
電壓 Voltage	AC110V~220V
顏色 Color	White / Black


Available
ON/OFF
TRIAC
0-10V
DALI
PLC



GL-XW4102

LED 有邊雙頭嵌入式射燈

-W:白色 -B:黑色



功率 Watts	2*7W / 2*9W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	72lm/W
角度 Beam angle	24° / 38°
顯指 Color rendering index	≥90
電壓 Voltage	AC110V~220V
顏色 Color	White / Black



Available
ON/OFF
TRIAC
0-10V
DALI
PLC



GL-WB4401

LED 無邊單頭嵌入式射燈

-W:白色 -B:黑色



功率 Watts	10W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	72lm/W
角度 Beam angle	24° / 38° / 60°
顯指 Color rendering index	≥90
電壓 Voltage	AC110V~220V
顏色 Color	White / Black



Available
ON/OFF
TRIAC
0-10V
DALI
PLC



GL-WB4402

LED 無邊雙頭嵌入式射燈


-W:白色 -B:黑色

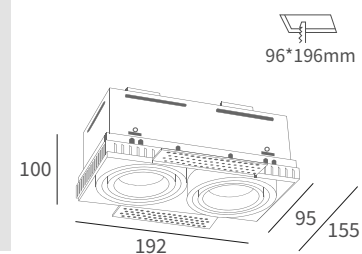

功率 Watts	2*10W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	70lm/W
角度 Beam angle	24° / 38° / 60°
顯指 Color rendering index	≥90
電壓 Voltage	AC110V~220V
顏色 Color	White / Black

Available
ON/OFF
TRIAC
0-10V
DALI
PLC





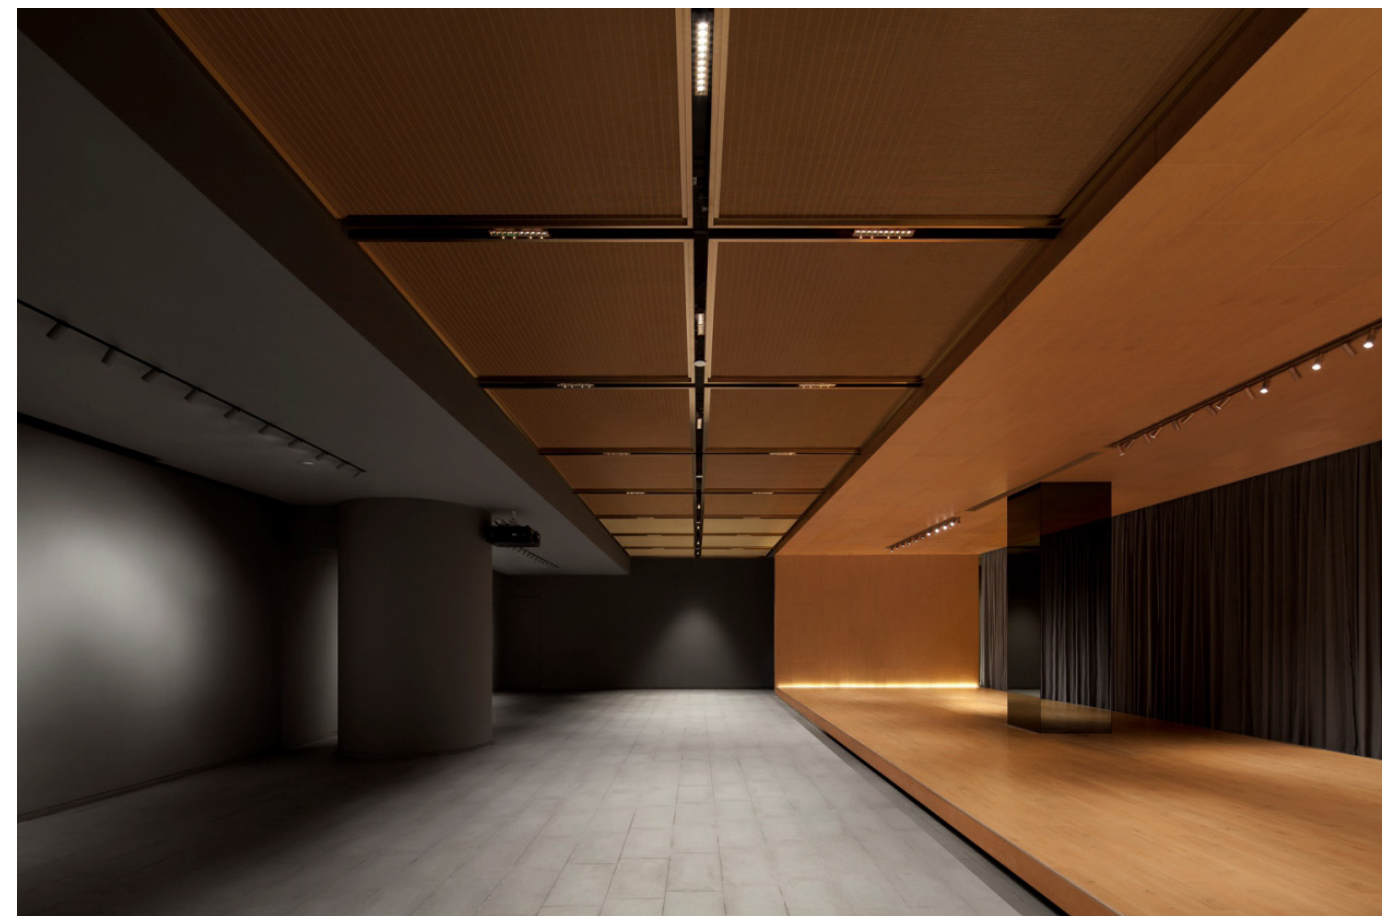

GL-JRST01

LED固定式無邊下照單頭射燈

-W:白色 -B:黑色





功率 Watts	2W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	70lm/W
角度 Beam angle	22° / 36° / 45°
顯指 Color rendering index	≥90
電壓 Voltage	AC110-220V
顏色 Color	White / Black
Available	ON/OFF TRIAC 0-10V DALI PLC Dimmable CCC CE CB

GL-JRST02

LED固定式無邊下照雙頭射燈

-W:白色 -B:黑色





功率 Watts	4W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	70lm/W
角度 Beam angle	22° / 36° / 45°
顯指 Color rendering index	≥90
電壓 Voltage	AC110-220V
顏色 Color	White / Black
Available	ON/OFF TRIAC 0-10V DALI PLC Dimmable CCC CE CB

GL-JRST05

LED固定式無邊下照五頭射燈

-W:白色 -B:黑色





功率 Watts	10W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	70lm/W
角度 Beam angle	22° / 36° / 45°
顯指 Color rendering index	≥90
電壓 Voltage	AC110-220V
顏色 Color	White / Black
Available	ON/OFF TRIAC 0-10V DALI PLC Dimmable CCC CE CB

GL-JRST10

LED固定式無邊下照十頭射燈

-W:白色 -B:黑色


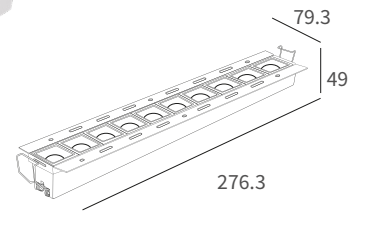


功率 Watts	20W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	70lm/W
角度 Beam angle	22° / 36° / 45°
顯指 Color rendering index	≥90
電壓 Voltage	AC110-220V
顏色 Color	White / Black
Available	ON/OFF TRIAC 0-10V DALI PLC Dimmable CCC CE CB

GL-JRS01

LED固定式有邊下照單頭射燈

-W:白色 -B:黑色





功率 Watts	2W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	70lm/W
角度 Beam angle	15° / 30° / 45°
顯指 Color rendering index	≥90
電壓 Voltage	AC110-220V
顏色 Color	White / Black
Available	ON/OFF TRIAC 0-10V DALI PLC Dimmable CCC CE CB

GL-JRS02

LED固定式有邊下照雙頭射燈

-W:白色 -B:黑色





功率 Watts	4W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	70lm/W
角度 Beam angle	15° / 30° / 45°
顯指 Color rendering index	≥90
電壓 Voltage	AC110-220V
顏色 Color	White / Black
Available	ON/OFF TRIAC 0-10V DALI PLC Dimmable CCC CE CB

GL-JRS05

LED固定式有邊下照五頭射燈

-W:白色 -B:黑色





功率 Watts	10W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	70lm/W
角度 Beam angle	15° / 30° / 45°
顯指 Color rendering index	≥90
電壓 Voltage	AC110-220V
顏色 Color	White / Black
Available	ON/OFF TRIAC 0-10V DALI PLC Dimmable CCC CE CB

GL-JRS10

LED固定式有邊下照十頭射燈

-W:白色 -B:黑色




功率 Watts	20W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	70lm/W
角度 Beam angle	15° / 30° / 45°
顯指 Color rendering index	≥90
電壓 Voltage	AC110-220V
顏色 Color	White / Black
Available	ON/OFF TRIAC 0-10V DALI PLC Dimmable CCC CE CB

GL-SK-SMTG03-14025006

LED固定式下照不可調三頭射燈

-W:白色 -B:黑色



功率 Watts	3*2W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	65lm/W
角度 Beam angle	15° / 24° / 36°
顯指 Color rendering index	≥90
電壓 Voltage	AC110-220V
顏色 Color	White / Black

Available

ON/OFF

TRIAC

0-10V

DALI

PLC

Dimmable

CCC

CE

CB

RoHS


IP 20

UGR<19

GL-SK-SMTG03-14025106

LED可調式三頭射燈

-W:白色 -B:黑色



功率 Watts	3*2W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	65lm/W
角度 Beam angle	15° / 30° / 45°
顯指 Color rendering index	≥90
電壓 Voltage	AC110-220V
顏色 Color	White / Black

Available

ON/OFF

TRIAC

0-10V

DALI

PLC

Dimmable

CCC

CE

CB

RoHS


IP 20

UGR<19

GL-SK-SMTG06-14026012

LED固定式下照不可調六頭射燈

-W:白色 -B:黑色



功率 Watts	6*2W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	58lm/W
角度 Beam angle	15° / 24° / 36°
顯指 Color rendering index	≥90
電壓 Voltage	AC110-220V
顏色 Color	White / Black

Available

ON/OFF

TRIAC

0-10V

DALI

PLC

Dimmable

CCC

CE

CB

RoHS



IP 20

UGR<19

GL-SK-SMTG06-14026112

LED可調式六頭射燈

-W:白色 -B:黑色



功率 Watts	6*2W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	58lm/W
角度 Beam angle	15° / 24° / 36°
顯指 Color rendering index	≥90
電壓 Voltage	AC110-220V
顏色 Color	White / Black

Available

ON/OFF

TRIAC

0-10V

DALI

PLC

Dimmable

CCC

CE

CB

RoHS


IP 20

UGR<19

GL-SK-SMTG12-14027024

LED固定式下照不可調十二頭射燈

-W:白色 -B:黑色

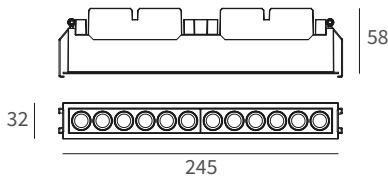

功率 Watts	12*2W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	65lm/W
角度 Beam angle	15° / 24° / 36°
顯指 Color rendering index	≥90
電壓 Voltage	AC110-220V
顏色 Color	White / Black

Available

ON/OFF

TRIAC

0-10V

DALI

PLC

Dimmable

CCC

CE

CB

RoHS


IP 20

UGR<19

GL-SK-SMTG12-14027124

LED可調式十二頭射燈

-W:白色 -B:黑色

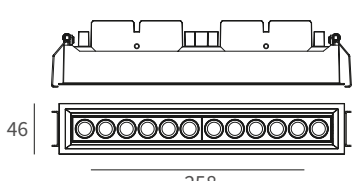

功率 Watts	12*2W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	65lm/W
角度 Beam angle	15° / 24° / 36°
顯指 Color rendering index	≥90
電壓 Voltage	AC110-220V
顏色 Color	White / Black

Available

ON/OFF

TRIAC

0-10V

DALI

PLC

Dimmable

CCC

CE

CB

RoHS


IP 20

UGR<19

GL-SK-SMTG03-14025006F

LED固定式無邊框下照不可調預埋三頭射燈

-W:白色 -B:黑色





功率 Watts	3*2W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	65lm/W
角度 Beam angle	15° / 24° / 36°
顯指 Color rendering index	≥90
電壓 Voltage	AC110-220V
顏色 Color	White / Black
Available	☐ Dimmable
ON/OFF	☐
TRIAC	☐
0-10V	☐
DALI	☐
PLC	☐



GL-SK-SMTG03-14025106F

LED可調式無邊框三頭射燈

-W:白色 -B:黑色




功率 Watts	3*2W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	65lm/W
角度 Beam angle	15° / 24° / 36°
顯指 Color rendering index	≥90
電壓 Voltage	AC110-220V
顏色 Color	White / Black
Available	☐ Dimmable
ON/OFF	☐
TRIAC	☐
0-10V	☐
DALI	☐
PLC	☐



GL-SK-SMTG06-14026012F

LED固定式無邊框下照不可調預埋六頭射燈

-W:白色 -B:黑色




功率 Watts	6*2W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	58lm/W
角度 Beam angle	15° / 24° / 36°
顯指 Color rendering index	≥90
電壓 Voltage	AC110-220V
顏色 Color	White / Black
Available	☐ Dimmable
ON/OFF	☐
TRIAC	☐
0-10V	☐
DALI	☐
PLC	☐



GL-SK-SMTG06-14026112F

LED可調式無邊框六頭射燈

-W:白色 -B:黑色




功率 Watts	6*2W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	58lm/W
角度 Beam angle	15° / 24° / 36°
顯指 Color rendering index	≥90
電壓 Voltage	AC110-220V
顏色 Color	White / Black
Available	☐ Dimmable
ON/OFF	☐
TRIAC	☐
0-10V	☐
DALI	☐
PLC	☐



GL-SK-SMTG12-14027024F

LED固定式無邊框下照不可調預埋十二頭

-W:白色 -B:黑色

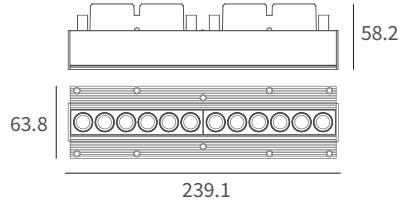


功率 Watts	12*2W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	65lm/W
角度 Beam angle	15° / 24° / 36°
顯指 Color rendering index	≥90
電壓 Voltage	AC110-220V
顏色 Color	White / Black
Available	☐ Dimmable
ON/OFF	☐
TRIAC	☐
0-10V	☐
DALI	☐
PLC	☐



GL-SK-SMTG12-14027124F

LED可調式無邊框十二頭射燈

-W:白色 -B:黑色

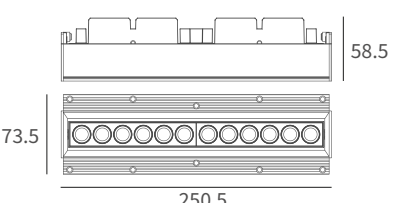



功率 Watts	12*2W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	65lm/W
角度 Beam angle	15° / 24° / 36°
顯指 Color rendering index	≥90
電壓 Voltage	AC110-220V
顏色 Color	White / Black
Available	☐ Dimmable
ON/OFF	☐
TRIAC	☐
0-10V	☐
DALI	☐
PLC	☐



SIMPLE SERIES




GL-XW2820 LED方形明裝射燈 -W:白色 -B:黑色



功率 Watts	9W
色溫 Color temperature	3000K / 4000K / 6000K
光效 Light efficiency	80lm/W
角度 Beam angle	20° / 40° / 60°
顯指 Color rendering index	≥90
電壓 Voltage	AC110V-220V
顏色 Color	White / Black

Available	Dimmable	CCC	CE	CB	RoHS	IP 20	UGR<19
ON/OFF							
TRIAC	(外置驅動)						
0-10V	(外置驅動)						
DALI	(外置驅動)						
PLC	(外置驅動)						



GL-XW2825 LED方形明裝射燈 -W:白色 -B:黑色



功率 Watts	12W / 15W
色溫 Color temperature	3000K / 4000K / 6000K
光效 Light efficiency	80lm/W
角度 Beam angle	20° / 40° / 60°
顯指 Color rendering index	≥90
電壓 Voltage	AC110V-220V
顏色 Color	White / Black

Available	Dimmable	CCC	CE	CB	RoHS	IP 20	UGR<19
ON/OFF							
TRIAC	(外置驅動)						
0-10V	(外置驅動)						
DALI	(外置驅動)						
PLC	(外置驅動)						

GL-XW2830 LED方形明裝射燈 -W:白色 -B:黑色




功率 Watts	25W
色溫 Color temperature	3000K / 4000K / 6000K
光效 Light efficiency	80lm/W
角度 Beam angle	20° / 40° / 60°
顯指 Color rendering index	≥90
電壓 Voltage	AC110V-220V
顏色 Color	White / Black

Available	Dimmable	CCC	CE	CB	RoHS	IP 20	UGR<19
ON/OFF							
TRIAC	(外置驅動)						
0-10V	(外置驅動)						
DALI	(外置驅動)						
PLC	(外置驅動)						

GL-XW2420

LED圓形明裝射燈

-W:白色 -B:黑色



20°

40°

60°

功率 Watts	7W
色溫 Color temperature	3000K / 4000K / 6000K
光效 Light efficiency	80lm/W
角度 Beam angle	20° / 40° / 60°
顯指 Color rendering index	≥90
電壓 Voltage	AC110V-220V
顏色 Color	White / Black

Available

ON/OFF

TRIAC

0-10V

DALI


PLC

Dimmable

GL-XW2425

LED圓形明裝射燈

-W:白色 -B:黑色



20°

40°

60°

功率 Watts	12W
色溫 Color temperature	3000K / 4000K / 6000K
光效 Light efficiency	80lm/W
角度 Beam angle	20° / 40° / 60°
顯指 Color rendering index	≥90
電壓 Voltage	AC110V-220V
顏色 Color	White / Black

Available

ON/OFF

TRIAC

0-10V

DALI


PLC

Dimmable

GL-XW2430

LED圓形明裝射燈

-W:白色 -B:黑色



20°

40°

60°

功率 Watts	18W
色溫 Color temperature	3000K / 4000K / 6000K
光效 Light efficiency	80lm/W
角度 Beam angle	20° / 40° / 60°
顯指 Color rendering index	≥90
電壓 Voltage	AC110V-220V
顏色 Color	White / Black

Available

ON/OFF

TRIAC

0-10V

DALI


PLC

Dimmable

GL-XW2440

LED圓形明裝射燈

-W:白色 -B:黑色



20°

40°

60°

功率 Watts	25W
色溫 Color temperature	3000K / 4000K / 6000K
光效 Light efficiency	80lm/W
角度 Beam angle	20° / 40° / 60°
顯指 Color rendering index	≥90
電壓 Voltage	AC110V-220V
顏色 Color	White / Black

Available

ON/OFF

TRIAC

0-10V

DALI


PLC

Dimmable

GL-XW2355T-D

LED明裝筒燈

-W:白色 -B:黑色



15°

24°

38°

功率 Watts	7W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	93lm/W
角度 Beam angle	15° / 24° / 38°
顯指 Color rendering index	≥80
電壓 Voltage	AC110V-220V
顏色 Color	White / Black

Available

ON/OFF

TRIAC

0-10V

DALI

PLC

Dimmable

Decorative reflector(selection) 裝飾反光杯(選擇)

bright black

bright silver

ivory white

space black

rose gold

亮黑

銀鏡

象牙白


太空黑

玫瑰金

GL-XW2375T-D

LED明裝筒燈

-W:白色 -B:黑色



15°

24°

38°

功率 Watts	9W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	90lm/W
角度 Beam angle	15° / 24° / 38°
顯指 Color rendering index	≥80
電壓 Voltage	AC110V-220V
顏色 Color	White / Black

Available

ON/OFF

TRIAC

0-10V

DALI

PLC

Dimmable

Decorative reflector(selection) 裝飾反光杯(選擇)

bright black

bright silver

ivory white

space black

rose gold

亮黑


銀鏡

象牙白

太空黑

玫瑰金




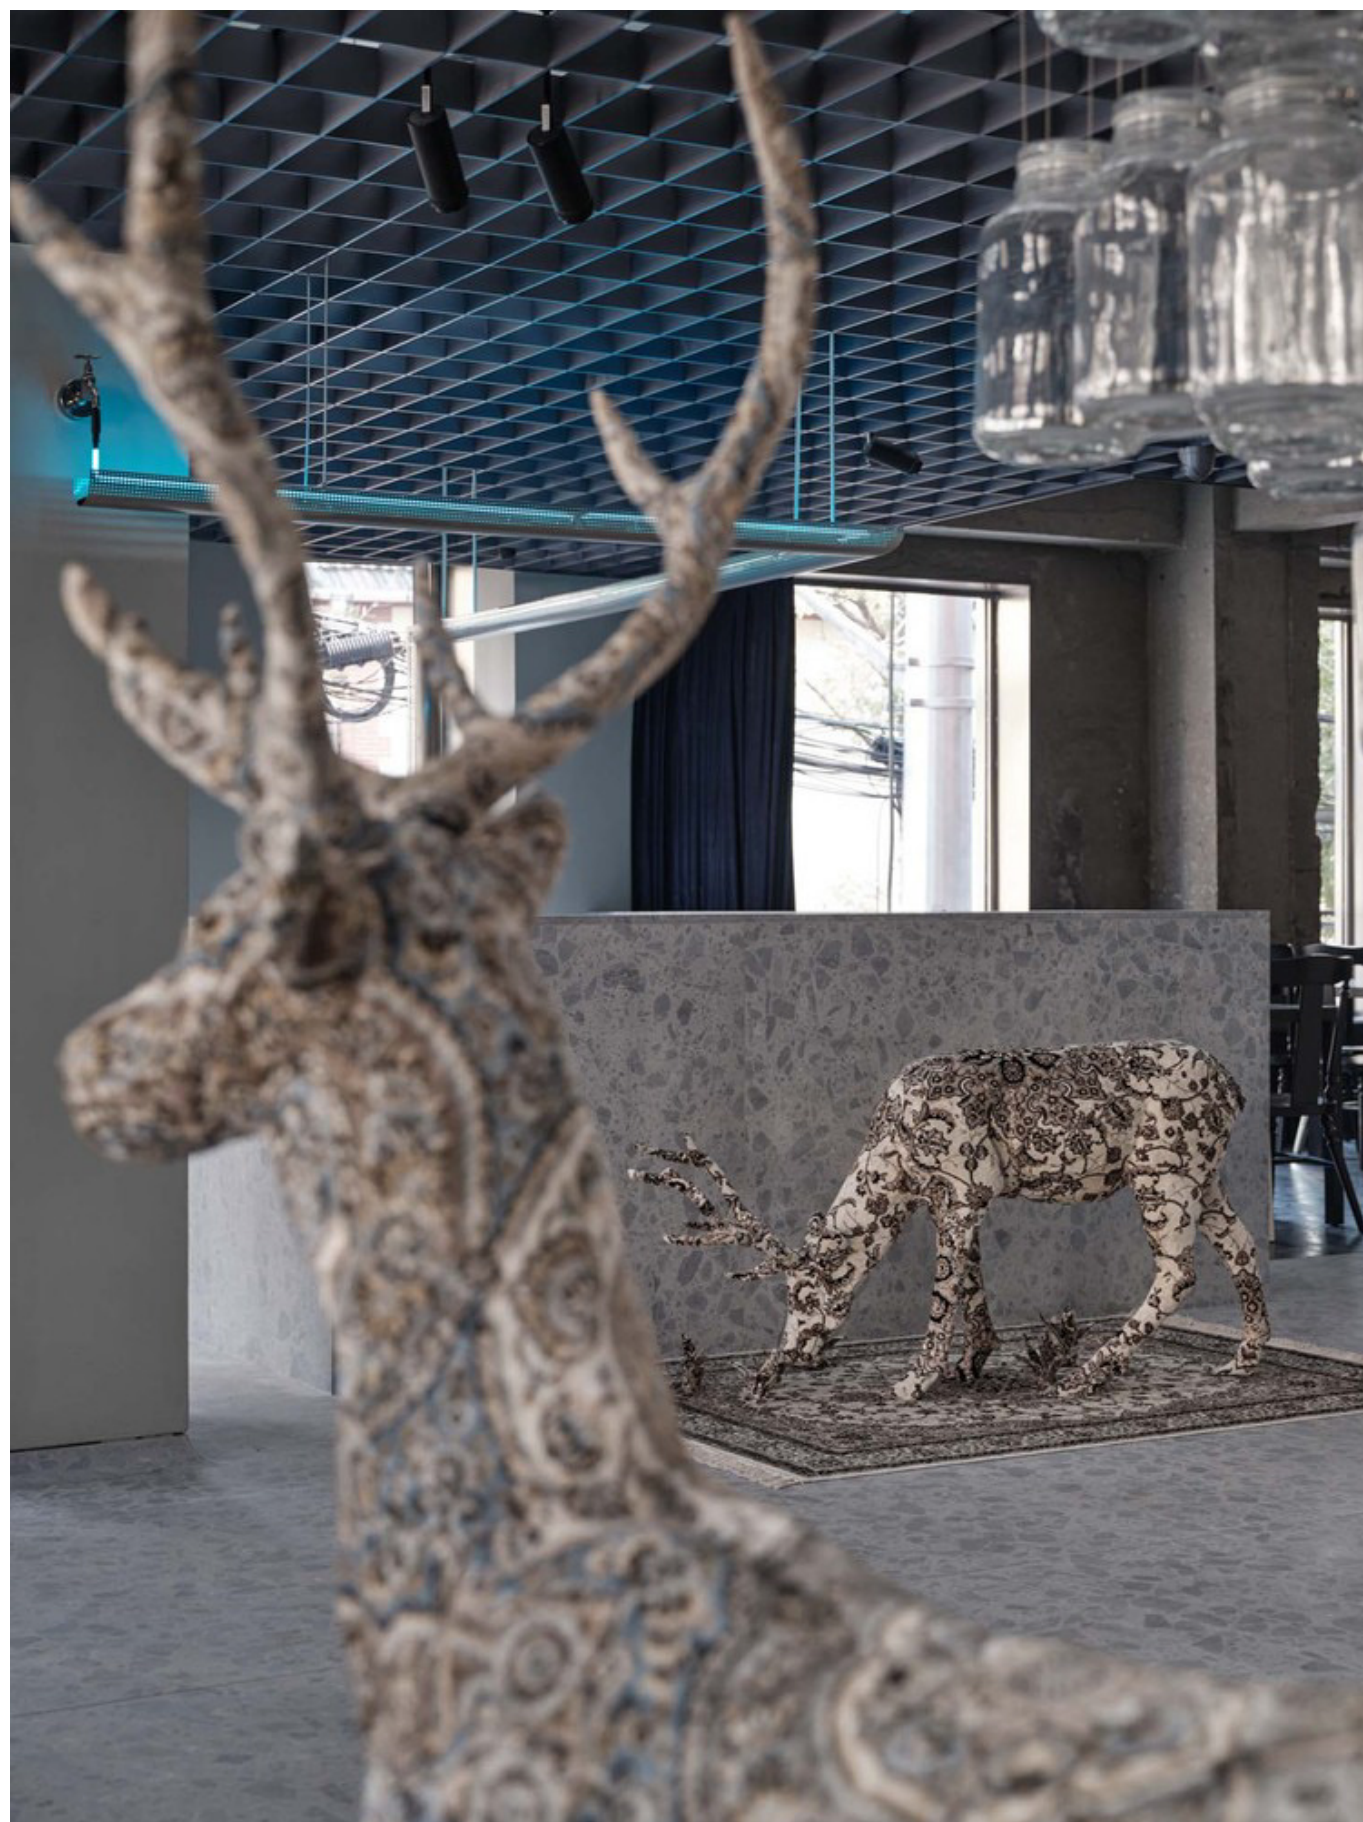

GL-XW3207T

LED 兩線軌道燈

-W:白色 -B:黑色



功率 Watts	30W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	70lm/W
角度 Beam angle	24° / 38°
顯指 Color rendering index	≥80
電壓 Voltage	AC110V-220V
顏色 Color	White / Black

Available


ON/OFF
TRIAC
0-10V
DALI
PLC

Dimmable

GL-BB-DF-G60-LNDB

LED 60內建電源兩線軌道燈

-W:白色 -B:黑色



功率 Watts	12W / 18W
色溫 Color temperature	3000K / 3500K / 4000K / 6000K
光效 Light efficiency	80lm/W
角度 Beam angle	15° / 24° / 36° / 50°
顯指 Color rendering index	≥95 (擬真光)
電壓 Voltage	AC110V-220V
顏色 Color	White / Black

Available



ON/OFF
TRIAC
0-10V
DALI
PLC

Dimmable

GL-S-L670

LED 二線軌道線型燈

-W:白色 -B:黑色



功率 Watts	22W
色溫 Color temperature	4000K / 5000K
光效 Light efficiency	80lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	AC110V-220V
顏色 Color	White / Black

Available



ON/OFF
TRIAC
0-10V
DALI
PLC

Dimmable

GL-S-L1190

LED 二線軌道線型燈

-W:白色 -B:黑色




功率 Watts	44W
色溫 Color temperature	4000K / 5000K
光效 Light efficiency	80lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	AC110V-220V
顏色 Color	White / Black

Available


ON/OFF
TRIAC
0-10V
DALI
PLC

Dimmable

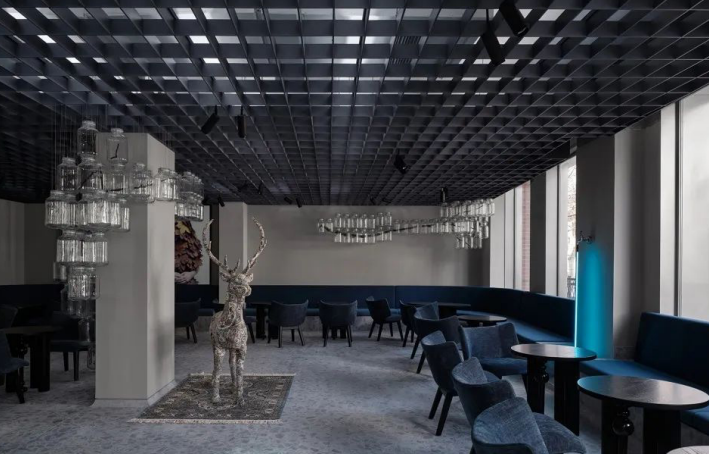




JW SPOT
SERIES

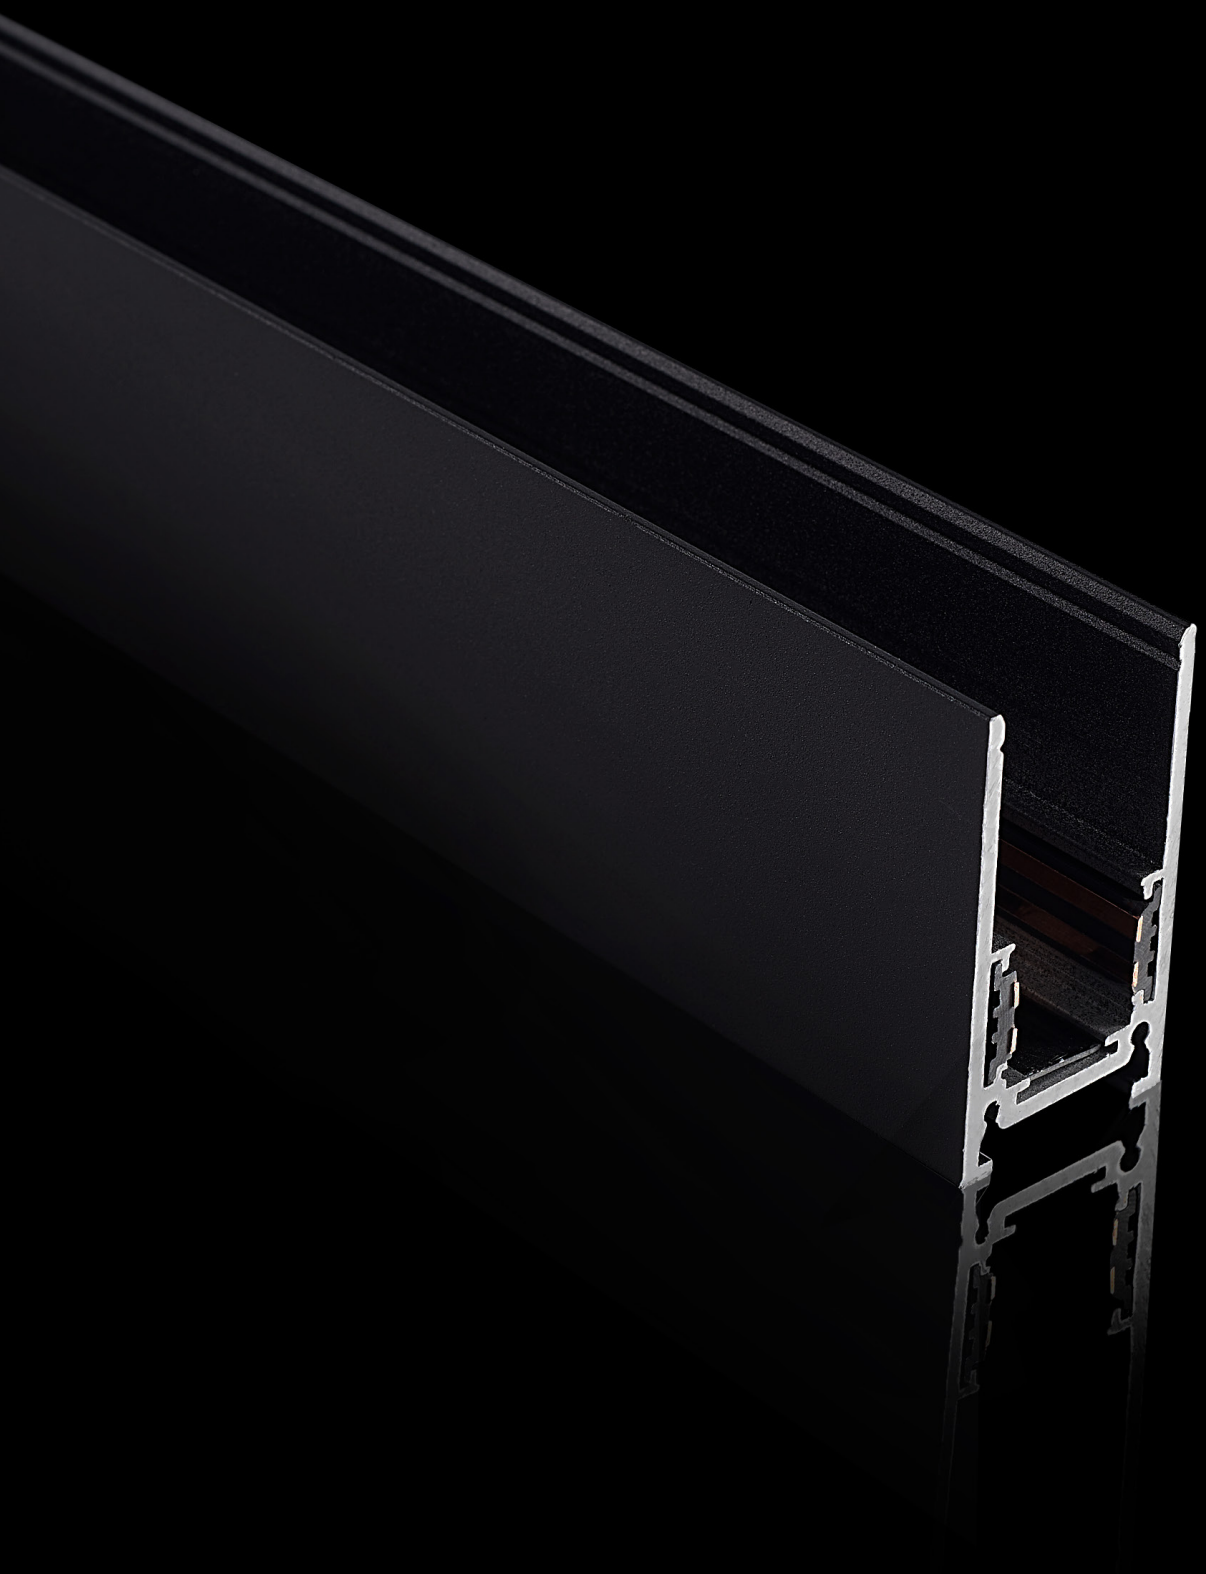


MAGNET 48V SYSTEM
JW SERIES

GL-JW2521 明裝48V磁吸軌道

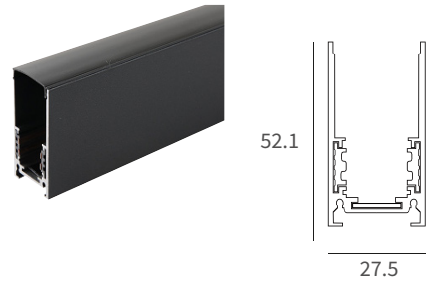

長度 length	1000mm / 2000mm / 3000mm(厚度2mm)
電壓 Voltage	DC48V (WITH DRIVER)
顏色 Colors	Black




GL-JW2521-1
End caps(pairs) 端蓋(一對)



GL-JW2521-4
Flexible electrical connector 轉角電器連接件




GL-JW2521-2
I type electrical connector I型電器連接件



GL-JW2521-5
Suspension clip panel 吊裝卡扣版(一對)




GL-JW2521-3
Electrical input 電器輸入端



GL-JW2521-6
Screw fastener 螺絲固定件(一組)

GL-JWR035T LED磁吸式軌道射燈



功率 Watts	7W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	75lm/W
角度 Beam angle	15° / 24° / 38°
顯指 Color rendering index	≥90
電壓 Voltage	DC48V
顏色 Color	Black

Available

ON/OFF

0-10V

DALI

Dimmable

CCC

CE

CB


90°

355°

IP 20

UGR<19

GL-JWTJ40T LED磁吸式可調焦軌道射燈



功率 Watts	7W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	75lm/W
角度 Beam angle	15°~60°
顯指 Color rendering index	≥90
電壓 Voltage	DC48V
顏色 Color	Black

Available

ON/OFF

0-10V

DALI

Dimmable

CCC

CE

CB


90°

355°

IP 20

UGR<19

GL-JWR045T LED磁吸式軌道射燈



功率 Watts	10W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	75lm/W
角度 Beam angle	15° / 24° / 38°
顯指 Color rendering index	≥90
電壓 Voltage	DC48V
顏色 Color	Black

Available

ON/OFF

0-10V

DALI

Dimmable

CCC

CE

CB


90°

355°

IP 20

UGR<19

GL-JWTJ50T LED磁吸式可調焦軌道射燈



功率 Watts	12W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	75lm/W
角度 Beam angle	15°~60°
顯指 Color rendering index	≥90
電壓 Voltage	DC48V
顏色 Color	Black

Available

ON/OFF

0-10V

DALI

Dimmable

CCC

CE

CB


90°

355°

IP 20

UGR<19

GL-JWR055T LED磁吸式軌道射燈



功率 Watts	15W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	75lm/W
角度 Beam angle	15° / 24° / 38°
顯指 Color rendering index	≥90
電壓 Voltage	DC48V
顏色 Color	Black

Available

ON/OFF

0-10V

DALI

Dimmable

CCC

CE

CB


90°

355°

IP 20

UGR<19

GL-JWTJ62T LED磁吸式可調焦軌道射燈



功率 Watts	18W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	75lm/W
角度 Beam angle	15°~60°
顯指 Color rendering index	≥90
電壓 Voltage	DC48V
顏色 Color	Black

Available

ON/OFF

0-10V

DALI

Dimmable

CCC

CE

CB


90°

355°

IP 20

UGR<19

GL-JWR065T LED磁吸式軌道射燈



功率 Watts	20W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	75lm/W
角度 Beam angle	15° / 24° / 38°
顯指 Color rendering index	≥90
電壓 Voltage	DC48V
顏色 Color	Black

Available

ON/OFF

0-10V

DALI

Dimmable

CCC

CE

CB

90°

355°

IP 20

UGR<19



功率 Watts	18W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	75lm/W
角度 Beam angle	15°~60°
顯指 Color rendering index	≥90
電壓 Voltage	DC48V
顏色 Color	Black

Available

ON/OFF

0-10V

DALI

Dimmable

CCC

CE

CB

90°

355°


IP 20

UGR<19



JW EYES
SERIES

GL-JWJ-20-6 LED磁吸式格柵燈




功率 Watts	6W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	75lm/W
角度 Beam angle	15° / 24° / 38°
顯指 Color rendering index	≥90
電壓 Voltage	DC48V
顏色 Color	Black

Available
ON/OFF
0-10V
DALI



GL-JWJ-20-12 LED磁吸式格柵燈




功率 Watts	12W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	75lm/W
角度 Beam angle	15° / 24° / 38°
顯指 Color rendering index	≥90
電壓 Voltage	DC48V
顏色 Color	Black

Available
ON/OFF
0-10V
DALI



GL-JWJ-20-18 LED磁吸式格柵燈




功率 Watts	18W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	75lm/W
角度 Beam angle	15° / 24° / 38°
顯指 Color rendering index	≥90
電壓 Voltage	DC48V
顏色 Color	Black

Available
ON/OFF
0-10V
DALI



GL-JWJ-20-24 LED磁吸式格柵燈




功率 Watts	24W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	75lm/W
角度 Beam angle	15° / 24° / 38°
顯指 Color rendering index	≥90
電壓 Voltage	DC48V
顏色 Color	Black


Available
ON/OFF
0-10V
DALI



Unconventional specifications, please consult the seller first
非常規規格產品請先與賣家溝通

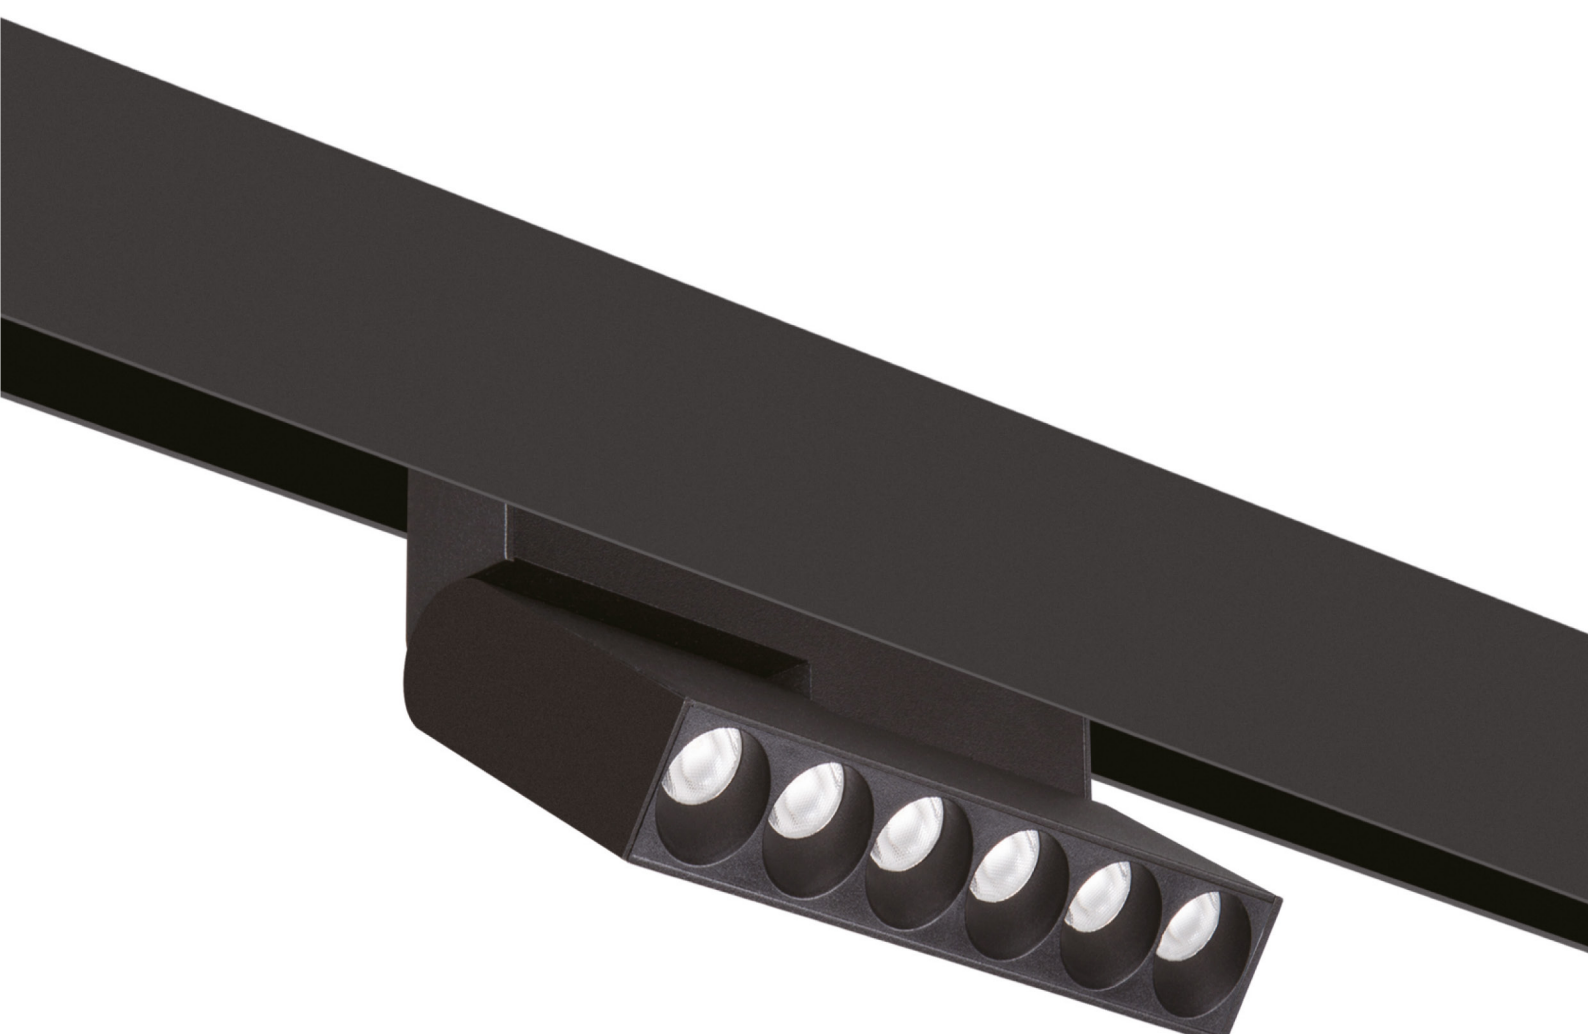

GL-JWT-20-6A LED磁吸式折疊格柵燈



功率 Watts	6W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	75lm/W
角度 Beam angle	15° / 24° / 38°
顯指 Color rendering index	≥90
電壓 Voltage	DC48V
顏色 Color	Black

Available

ON/OFF

0-10V

DALI

Dimmable

CCC

CE


CB

90°

IP 20

UGR<19

GL-JWT-20-12A LED磁吸式折疊格柵燈



功率 Watts	12W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	75lm/W
角度 Beam angle	15° / 24° / 38°
顯指 Color rendering index	≥90
電壓 Voltage	DC48V
顏色 Color	Black

Available

ON/OFF

0-10V

DALI

Dimmable

CCC

CE


CB

90°

IP 20

UGR<19

GL-JWT-20-18A LED磁吸式折疊格柵燈



功率 Watts	18W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	75lm/W
角度 Beam angle	15° / 24° / 38°
顯指 Color rendering index	≥90
電壓 Voltage	DC48V
顏色 Color	Black

Available

ON/OFF

0-10V

DALI

Dimmable

CCC

CE

CB

180°

IP 20


UGR<19

JW EYES
SERIES



JW EYES
SERIES


GL-JWJT-12 LED磁吸式可調180度格柵燈

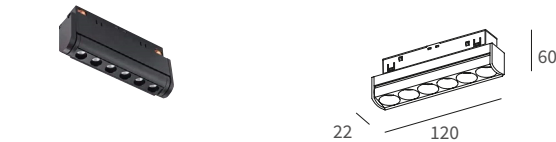

功率 Watts	6W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	75lm/W
角度 Beam angle	15° / 24° / 38°
顯指 Color rendering index	≥90
電壓 Voltage	DC48V
顏色 Color	Black

Available	Dimmable	CCC	CE	CB	RoHS	IP20	UGR<19
ON/OFF							
0-10V							
DALI							


GL-JWJT-22 LED磁吸式可調180度格柵燈

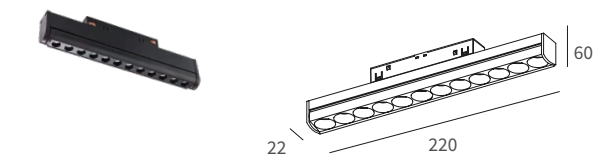

功率 Watts	12W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	75lm/W
角度 Beam angle	15° / 24° / 38°
顯指 Color rendering index	≥90
電壓 Voltage	DC48V
顏色 Color	Black

Available	Dimmable	CCC	CE	CB	RoHS	IP20	UGR<19
ON/OFF							
0-10V							
DALI							

GL-JWJT-32 LED磁吸式可調180度格柵燈

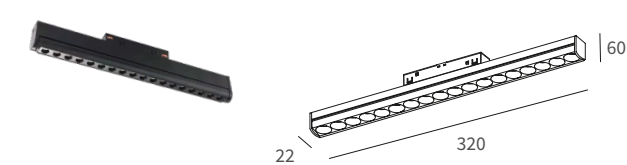


功率 Watts	18W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	75lm/W
角度 Beam angle	15° / 24° / 38°
顯指 Color rendering index	≥90
電壓 Voltage	DC48V
顏色 Color	Black

Available	Dimmable	CCC	CE	CB	RoHS	IP20	UGR<19
ON/OFF							
0-10V							
DALI							

JW LINEARLIGHT
SERIES

GL-JWL-20-300 LED磁吸式下照線性燈

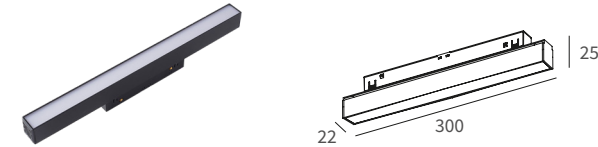


功率 Watts	10W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	75lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC48V
顏色 Color	Black

Available
ON/OFF
0-10V
DALI



GL-JWL-20-600 LED磁吸式下照線性燈

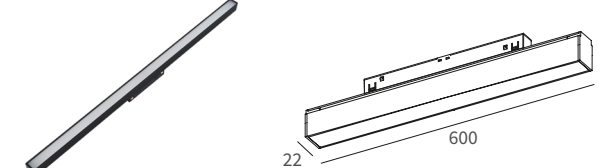


功率 Watts	20W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	75lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC48V
顏色 Color	Black

Available
ON/OFF
0-10V
DALI



GL-JWL-20-900 LED磁吸式下照線性燈

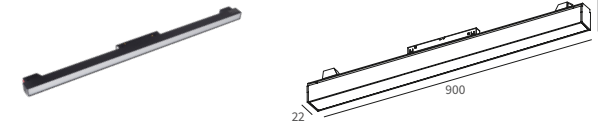

功率 Watts	30W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	75lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC48V
顏色 Color	Black

Available
ON/OFF
0-10V
DALI



LU

MAGNETIC TRACK
SERIES




GL-LTA165

平面式磁吸軌道

-W:白色 -B:黑色 -S:銀色



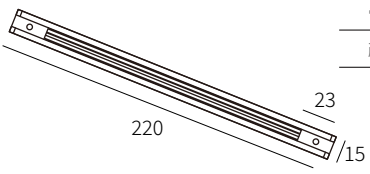

長度 length	2500mm (MAX)
電壓 Voltage	DC12V / DC24V (WITH DRIVER)
顏色 Colors	White / Black / Silver

IP 20

Suspension Wire Accessories 導線配件

GL-LUB238



track connector
軌道連接器

GL-LUB1068




power connector
電源連接器

GL-LTB140

圓柱式磁吸軌道

-W:白色 -B:黑色 -S:銀色





螺絲台面固定

開孔螺帽固定

長度 length	2500mm (MAX)
電壓 Voltage	DC12V / DC24V (WITH DRIVER)
顏色 Colors	White / Black / Silver

IP 20

Suspension Wire Accessories 導線配件

GL-LUB238



track connector
軌道連接器

GL-LUB1068




power connector
電源連接器

GL-LTC120-6

LED透明磁吸導線





電流 Electric current	1A
電壓 Voltage	DC12V / DC24V
長度 Length	120cm (厚度0.1mm)

IP 20

Transparent Suspension Wire Accessories 透明導線配件

GL-PET43016



oval base
橢圓盤底座

GL-PET3610




power connector
電源連接器

GL-LUB7517-P-2W

LED磁吸式小射燈

-W:白色 -B:黑色 -S:銀色





功率 Watts	2W
色溫 Color temperature	3000K / 4000K / 6000K
光效 Light efficiency	210lm/W
角度 Beam angle	8° / 25° / 45° / 80°
顯指 Color rendering index	≥90
電壓 Voltage	DC12V / DC24V
顏色 Color	Black / Silver / Gold

Available ON/OFF ☐ Dimmable ☐

90° 355° IP 20


8° 25° 45° 80°

GL-LUB7520-P-1W

LED磁吸式小射燈

-W:白色 -B:黑色 -S:銀色





功率 Watts	1W
色溫 Color temperature	3000K / 4000K / 6000K
光效 Light efficiency	150lm/W
角度 Beam angle	8° / 25° / 45° / 80°
顯指 Color rendering index	≥90
電壓 Voltage	DC12V / DC24V
顏色 Color	White / Black / Silver / Gold

Available ON/OFF ☐ Dimmable ☐

90° 355° IP 20


8° 25° 45° 80°

GL-LUB7523-P-3W

LED磁吸式可調焦小射燈

-W:白色 -B:黑色 -S:銀色





功率 Watts	3W
色溫 Color temperature	3000K / 4000K / 6000K
光效 Light efficiency	210lm/W
角度 Beam angle	10° - 60° (adjustable)
顯指 Color rendering index	≥90
電壓 Voltage	DC12V / DC24V
顏色 Color	Black / Silver

Available ON/OFF ☐ Dimmable ☐

90° 355° IP 20 UGR<19


10°-60°

GL-LUB7527-P-3W

LED磁吸式小射燈

-W:白色 -B:黑色 -S:銀色





功率 Watts	3W
色溫 Color temperature	3000K / 4000K / 6000K
光效 Light efficiency	300lm/W
角度 Beam angle	15° / 30° / 60°
顯指 Color rendering index	≥90
電壓 Voltage	DC12V / DC24V
顏色 Color	White / Black / Silver / Gold

Available ON/OFF ☐ Dimmable ☐

90° 355° IP 20




15° 30° 60°

LU SURFACE SOPTLIGHT
SERIES



GL-LUB7517-3-2W LED明裝小射燈

-W:白色 -B:黑色 -S:銀色





功率 Watts	1*2W
色溫 Color temperature	3000K / 4000K / 6000K
光效 Light efficiency	210lm/W
角度 Beam angle	8° / 25° / 45° / 80°
顯指 Color rendering index	≥90
電壓 Voltage	DC 12V
顏色 Color	White / Black / Silver

Available ON/OFF Dimmable     

GL-LUB7520-3-1W LED明裝小射燈

-W:白色 -B:黑色 -S:銀色




功率 Watts	1*1W
色溫 Color temperature	3000K / 4000K / 6000K
光效 Light efficiency	150lm/W
角度 Beam angle	8° / 25° / 45° / 80°
顯指 Color rendering index	≥90
電壓 Voltage	DC 12V
顏色 Color	White / Black / Silver

Available ON/OFF Dimmable     

GL-LUB7523-3-3W LED明裝小射燈

-W:白色 -B:黑色 -S:銀色






功率 Watts	1*3W
色溫 Color temperature	3000K / 4000K / 6000K
光效 Light efficiency	210lm/W
角度 Beam angle	10° - 60°(Adjustable)
顯指 Color rendering index	≥90
電壓 Voltage	DC 12V
顏色 Color	Black / Silver

Available ON/OFF Dimmable     

GL-LUB7527-3-3W LED明裝小射燈

-W:白色 -B:黑色 -S:銀色



功率 Watts	4*0.8W
色溫 Color temperature	3000K / 4000K / 6000K
光效 Light efficiency	300lm/W
角度 Beam angle	15° / 30° / 60°
顯指 Color rendering index	≥90
電壓 Voltage	DC 12V
顏色 Color	White / Black / Silver

Available ON/OFF Dimmable     



SKYLINE SERIES

"Every atmosphere, every place, becomes a piece of art"

Using the extraordinary light of the skyline to paint. It is a continuous band of indirect light that cuts through space like a shining blade. The skyline is a very thin band, only 20mm wide, made by stainless steel.

You can adapt it to any space, place it anywhere you want, extend it from wall to wall, or extend it from ceiling to floor.

"每一個氛圍，每一個地方，都成為一件藝術品"，用天際線的非凡光芒作畫。它是一條連續的間接光帶，像閃亮的刀片一樣穿過空間。

天際線是一條非常細的帶子，只有 20 毫米寬，由不銹鋼製成。


您可以將其適應任何空間，將其放置在您想要的任何位置，將其從牆壁延伸到牆壁，或將其從天花板延伸到地板。

GL-SKYLINE LED 2.0天際線

-W:白色 -B:黑色




120°




90

功率 Watts	9.6W (5M / 10M) / 14.4W (5M / 10M) / 11W (15M / 20M)
色溫 Color temperature	3000K / 3500K / 4000K / 5000K / 2700K-6000K / RGB(W:OPTION)
光效 Light efficiency	80lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	White / Black
Available	ON/OFF TRIAC 0-10V DALI PLC Dimmable Tunable white RGBW CCC CE CB IP 20


DIMENSION


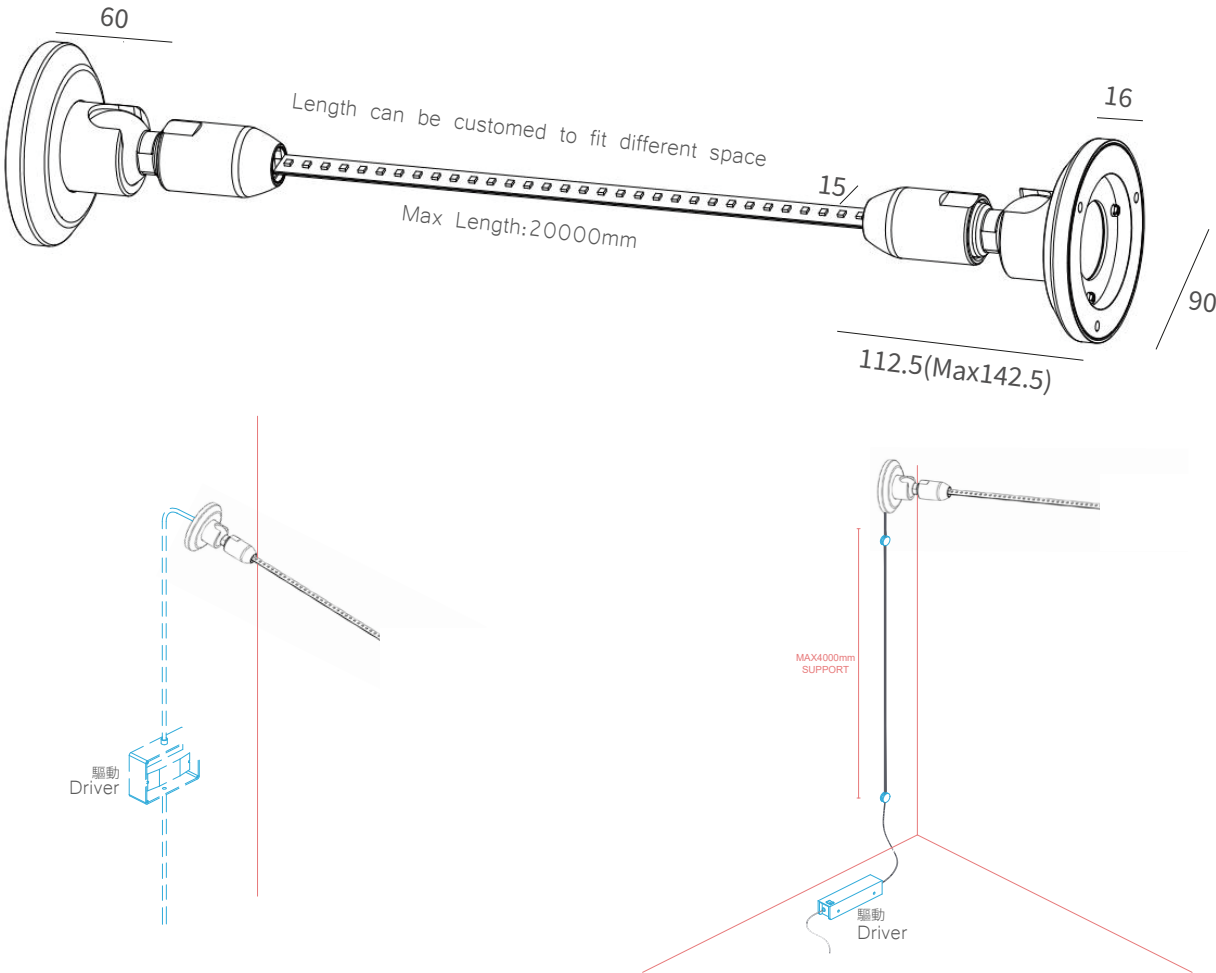


LIGHTING GUIDE

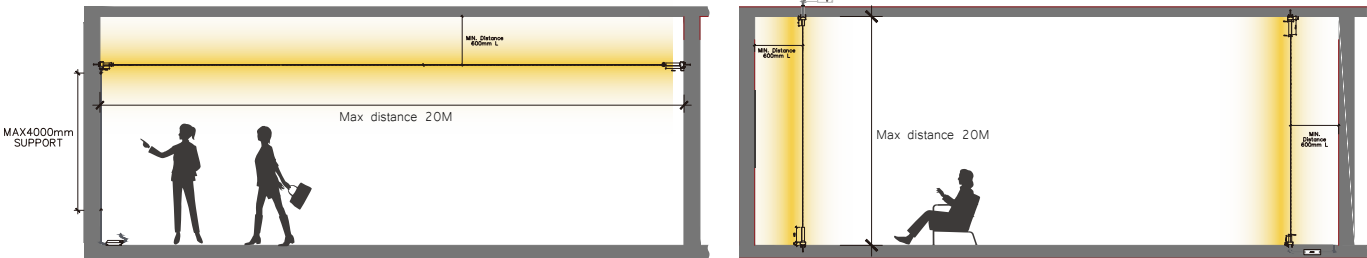


INSTALLATION MODE

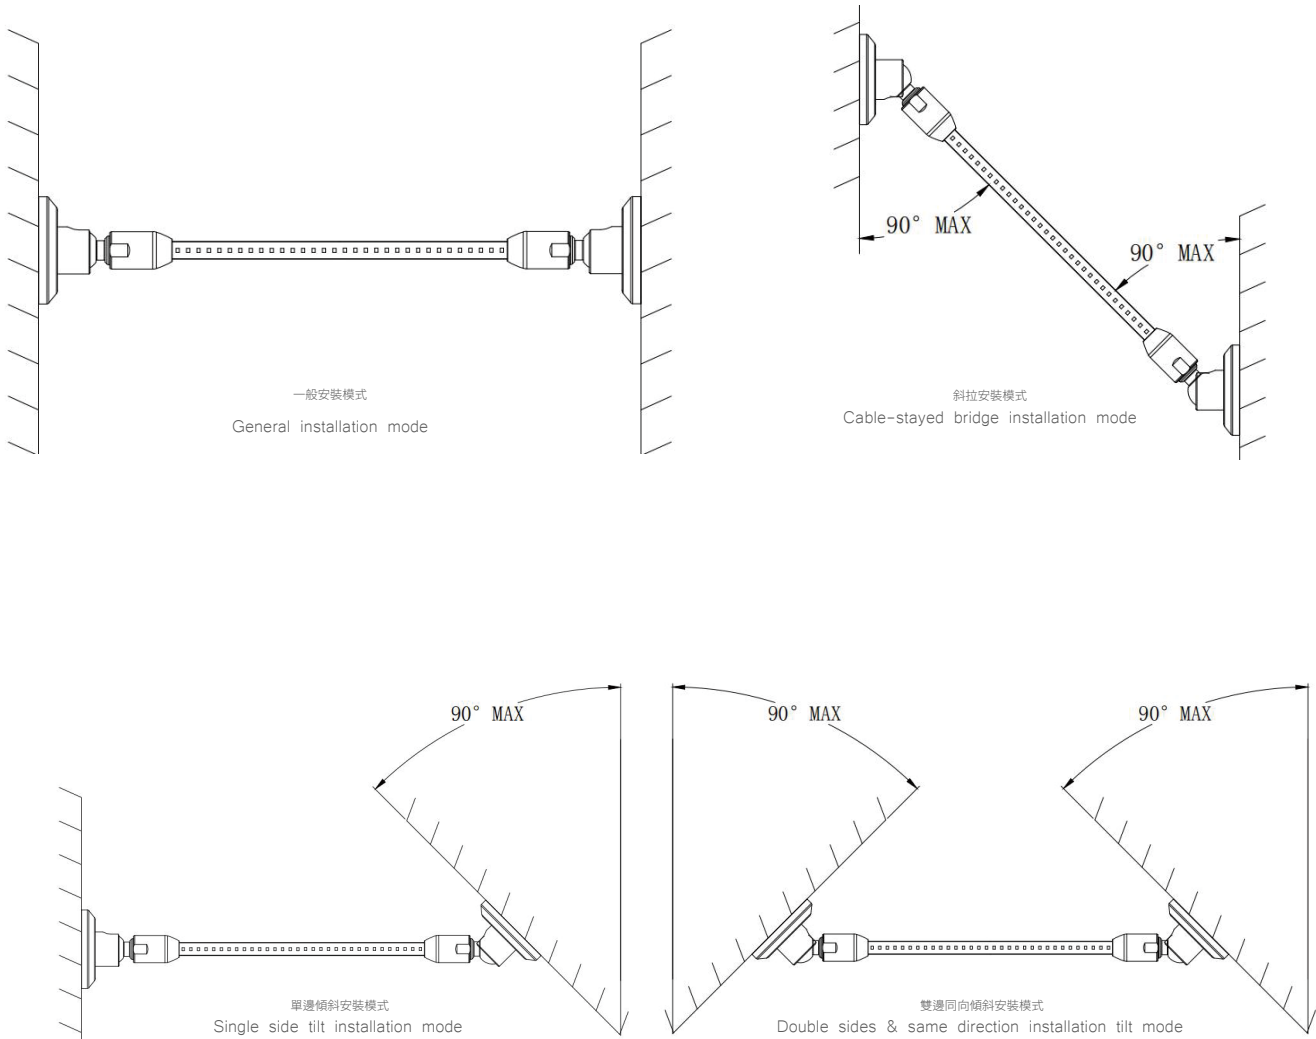

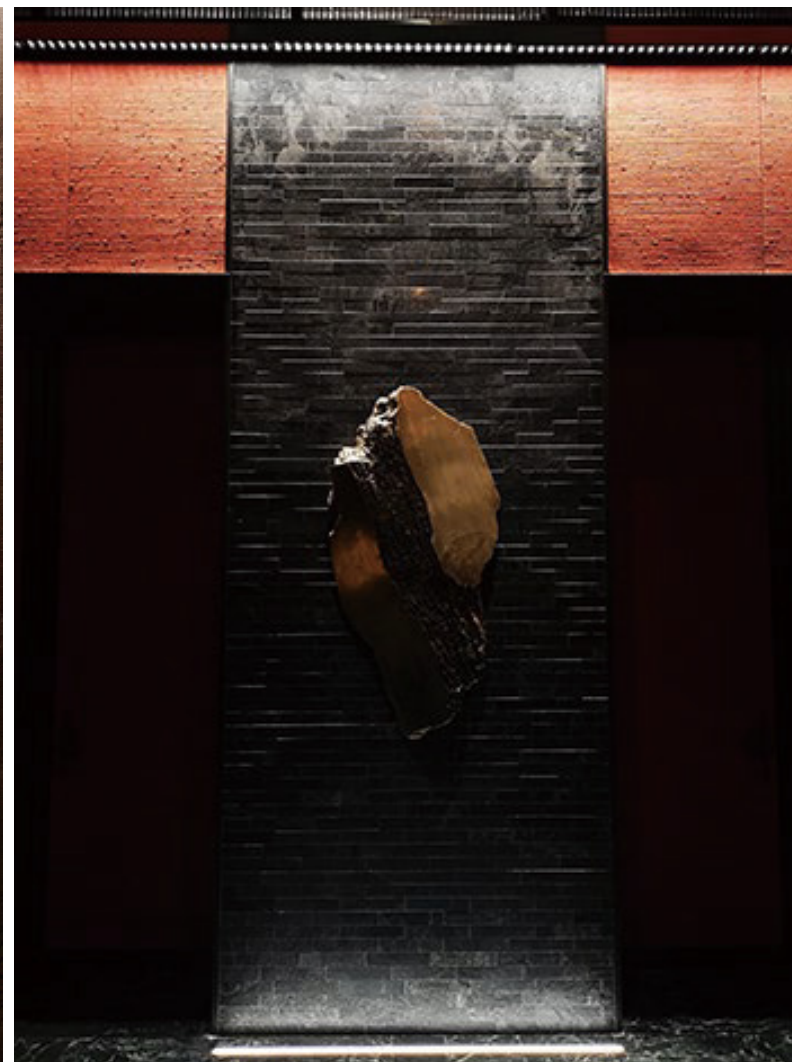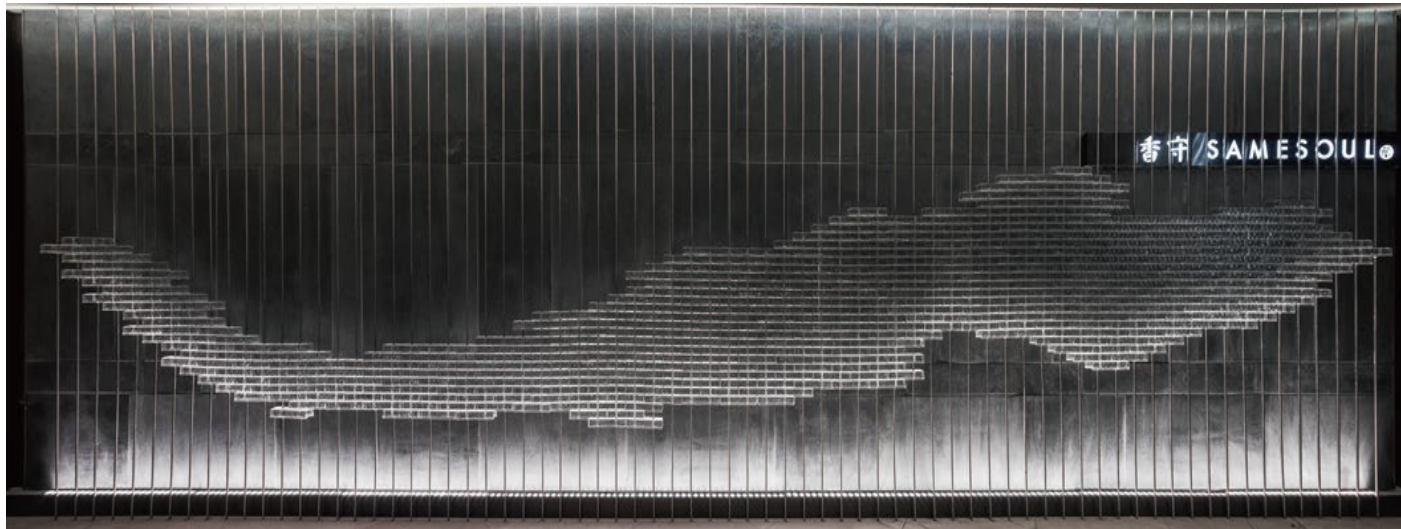


OUT DOOR WALLWASHER
SERIES

GL-SXH025WP LED平面洗牆燈-IP65

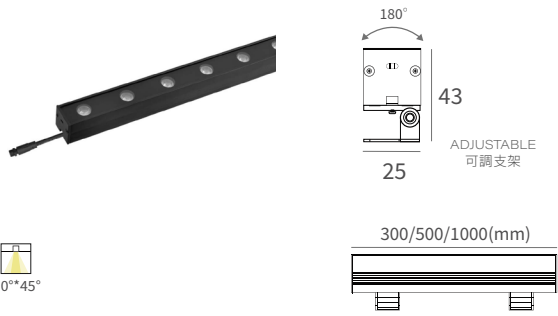


功率 Watts	6W/0.3M 12W/0.5M 24W/1M
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	70lm/W
角度 Beam angle	25°*45°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	White / Black
Available	ON/OFF TRIAC (外部驅動) 0-10V (外部驅動) DALI (外部驅動) PLC (外部驅動) Dimmable
Accessories 配件	POWER CABLE 電源線

GL-SXH025WL LED格柵洗牆燈-IP65

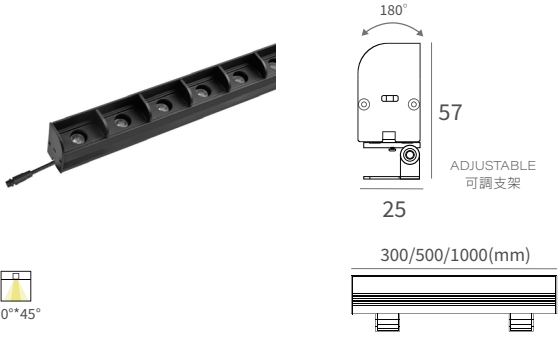


功率 Watts	7W/0.3M 12W/0.5M 24W/1M
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	75lm/W
角度 Beam angle	25°*45°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	White / Black
Available	ON/OFF TRIAC (外部驅動) 0-10V (外部驅動) DALI (外部驅動) PLC (外部驅動) Dimmable
Accessories 配件	POWER CABLE 電源線

GL-SXH025WL LED格柵洗牆燈-IP65

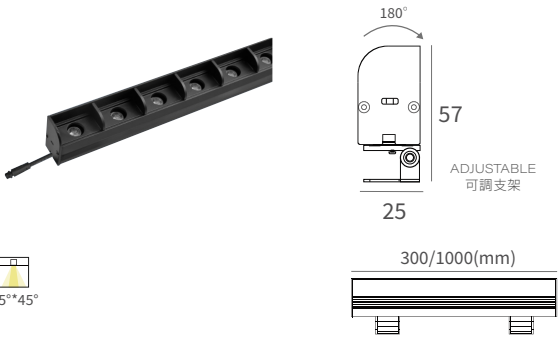

功率 Watts	9W/0.3M 24W+24W/1M
色溫 Color temperature	2700K-6000K
光效 Light efficiency	75lm/W
角度 Beam angle	25° x 45°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	Black
Available	ON/OFF TRIAC (外部驅動) 0-10V (外部驅動) DALI (外部驅動) PLC (外部驅動) Tunable white
Accessories 配件	POWER CABLE 電源線

GL-ZD2527 LED柔性硅膠洗牆燈

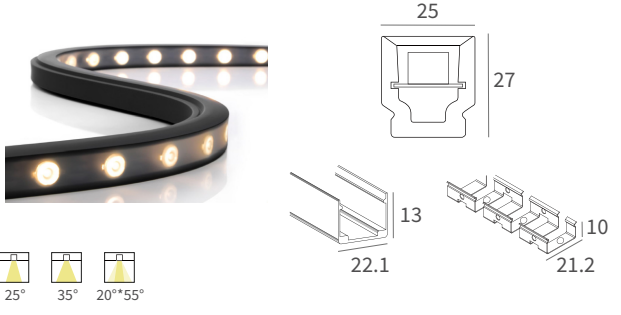

功率 Watts	24W/M
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	80lm/W
角度 Beam angle	25° / 35° / 20°*55°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	Black
Available	ON/OFF TRIAC 0-10V DALI PLC Dimmable
Accessories 配件	POWER CABLE 電源線





Catalogue Vol. 25

中國總部 / 浙江省嘉興市嘉善縣台升大道3號資訊科技城B區21幢
Building 21, Zone B, Information Technology City, No. 3 Taisheng Avenue,
Jiashan County, Zhejiang Province

台灣旗艦店 / 台北市中山區松江路435號
No. 435, Songjiang Rd., Zhongshan Dist., Taipei City 104055, Taiwan (R.O.C.)

台灣總部 / 台中市南屯區大墩四街325號
No. 325, Dadun 4th St., Nantun Dist., Taichung City 408028, Taiwan (R.O.C.)