

GREAT LIGHTING

Catalogue Vol 24

ABOUT US

關於我們

Jiashan Great lighting Ltd. is located in Jiashan National Economic Development area , was founded in 2008. it is a company integrating p-
roduction, research and development, trade, and service as one profes-
sional lighting company

After more than ten years of development, Great Lighting has establish-
ed a branch in Taiwan in 2020.

Since the development of the company for over 10 years, we have establi-
shed with internationally renowned designer and have completed the pro-
jects of Google in Shanghai , Lego in in Shanghai , Abbott in Shanghai ,
NIKE Flagship Store in Shanghai , Linkedin in Shanghai ,Steelcase in Sha-
ghai, Alibaba in Hangzhou , Alibaba in Guangzhou etc.,

To keep pace with the times, forward thinking and innovation is the power.
We think lighting not just only light, we believe it cover we life , happiness,
quality . like the sun that warm us when winter is coming , like the moon
that guide us home when night is coming,trust light will make us have a
better life , development excellent light quality and high quality service are
Great lighting first priority.

嘉善大燁照明有限公司位於嘉善國家級經濟開發區 ，成立於2008年，是一家
集生產、研發、貿易、服務於一體的專業照明公司。

經過十餘年的發展，大燁照明在2020年台灣設立了分公司

深耕十餘年下來的同時，我們與國際知名設計師緊密合作配合，並且完成了
許多知名項目，如上海Google、上海樂高、上海亞培、上海首家NIKE旗艦
店、上海領英、上海Steelcase、杭州阿里巴巴、廣州阿里巴巴....等等。

與時俱進，前瞻創新是動力，我們認為照明不僅僅是光，我們相信它涵蓋了
我們的生活、幸福、品質。就像冬天來了溫暖我們的太陽，就像夜幕降臨時
引導我們回家的月亮。相信光會讓我們擁有更美好的生活，發展優良的光品
質和優質的服務是大燁照明的首要任務。

WE HAD COOPERATE WITH



TO BE CONTINUED

ABOUT QUALITY

關於品質

Quality is the life of an enterprise, and the company has a complete Good quality management system, set quality inspection standards accurate, customized strict shipping standards and improved quality control documents (such as forms, procedures, specifications, etc.)

so that all products have standards The quality is all carried out according to the standards, so that the quality can be followed by a book, and the quality is carried out according to the book, so as to be a comprehensive system. The guarantee of quality allows our products to have a broader market, satisfying customers and achieving long-term successful cooperation.

品質作為企業的生命，公司擁有了完善品質管理系統，設定了品質檢驗標準，定制了嚴格的出貨標準，完善了品控文件（如表格，流程，規範等等）

讓所有產品都有標準品質，全部以標準進行，讓品質有冊可依，依冊而行，從而全面系統。品質的保證讓我們的产品市場更廣闊，讓客戶滿意而達到長期成功的合作。



Automatic solder paste printing machine



4 Four machines: YAMAHA from Japan the most sophisticated SMT machine in the world



Reflow soldering



Automatic PCB welding machine



Automatic wire welding machine



40 Aging lines



Reel machine



Package lines




Microscope
Observe the LED sources are intact




Constant temperature and humidity chamber (-20°C ~ 50°C)
Test fixtures performance in harsh environment



LED electric oven
Remove the moisture from the LED sources, to keep the good stability of the LEDs, otherwise, with the moisture inside the LED, the LED easy to broke during usage

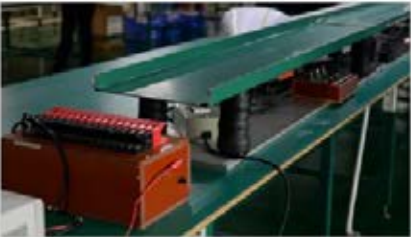

Vibration test table
Vibrate the finished products, for testing the stability of the products

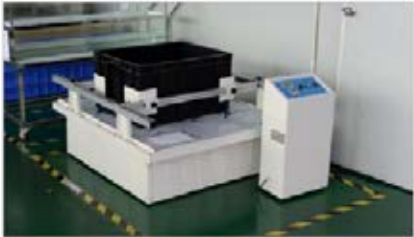

Transportation vibration testing machine
Test the reliability of package



Other detection devices


COLOR TEMPERATURE CONSISTENCY 色溫一致性

Great lighting knows well the requirement for color temperature consistency for the quality lighting and also faces the phenomenon of inconsistency in terms of color temperature in market.It is a headache of designers andthe consumers.

For this purpose, Greatr lighitng applied the LED chips at high consistency(SDCM≤3) from the quality chips manufacturers.All LED chips are sorted out,stored and processed in strict and scientific criterion to guarantee the led chips are consistent in the same batch.

大燁照明深知優質照明對色溫一致性的要求，也面臨市場上色溫不一致的現象，是設計師和消費者頭疼的問題。

為此，大燁照明採用了高一致性的LED芯片 (SDCM≤3) 來自優質芯片製造商。所有LED芯片均按照嚴格科學的標準進行分類、儲存和加工，以保證LED芯片在同一批次中的一致性

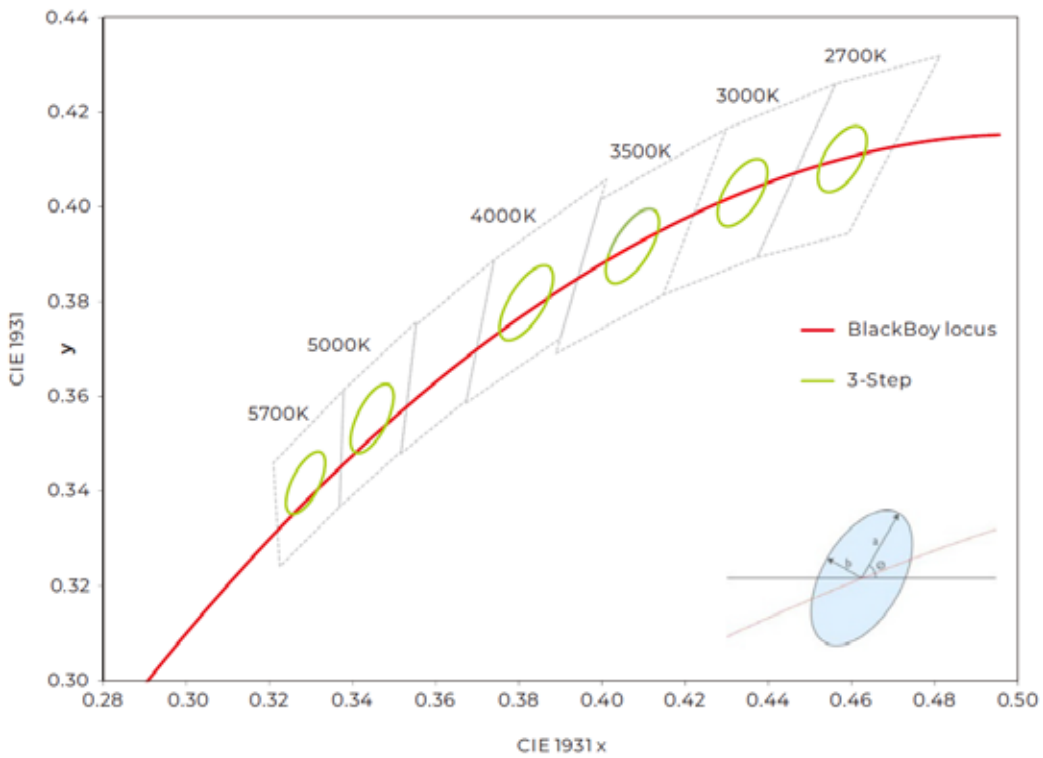

HIGH CRI(HIGH COLOR SATURATION) 高CRI(高色彩飽和度)

The color rendering index of sunlight is defined as 100, and the color rendering index of incandescent lamps is very close to sunlight, so it is regarded as an ideal reference light source.

Great lighting series adopt world top class LED chip. High color rendering with Ra > 90 makes the subject natural and fresh while few LED products can do so at present.Lighting in high power & high CRI makes the subject outstand in color and material feature,and thus perfectly reflecting the colors of the subject and of human beings. It is an idea lighting solution for the boutiques and important social activities places etc.

太陽光的顯色指數定義為100，白熾燈的顯色指數非常接近日光，因此被視為理想的基準光源。

大燁照明採用世界頂級LED芯片。Ra > 90的高顯色性接近自然光底下的色彩飽和，目前很少有LED產品可以做到這一點。高功率高顯色指數的照明使被攝體在色彩和材料特性上突出，從而完美地反映被攝體的顏色和人體。它是精品店和餐飲社交活動場所等的理想照明解決方案。


High color rendering index 顯色評價指數

The graph below shows the color rendering evaluation numbers of the reference light and "Quality plus Q+". The average color rendering evaluation number is Ra96, red R9-95, and flesh color R15-97, with color reproduction performance close to sunlight. 下图表示基準光和 "Quality plus Q+" 的演色评价数。平均演色评价数为Ra96，红色R9-95，肉色R15-97，具有接近太阳光的颜色再现性能。

	Ra Average	R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
Q+	96	98	98	96	94	98	96	95	96	95	97	93	93	97	97	97
中演色	83	82	92	95	80	82	91	82	57	4	82	78	69	84	98	73
昼白色螢光燈	79	89	89	54	82	81	72	86	76	16	40	63	55	92	70	92

※ Ra is the average value of the values from R1 to R8, and is a representative value of the color rendering evaluation index. Ra是R1~R8為止的數值的平均值，是顯色評價指數的代表性的值

※ The special color evaluation index R9 (red) and R15 (Asian skin color) are important wavelengths for looking beautiful. 特殊顏色評價指數R9(紅色)和R15(亞洲人的膚色)，是看上去漂亮的重要波長。

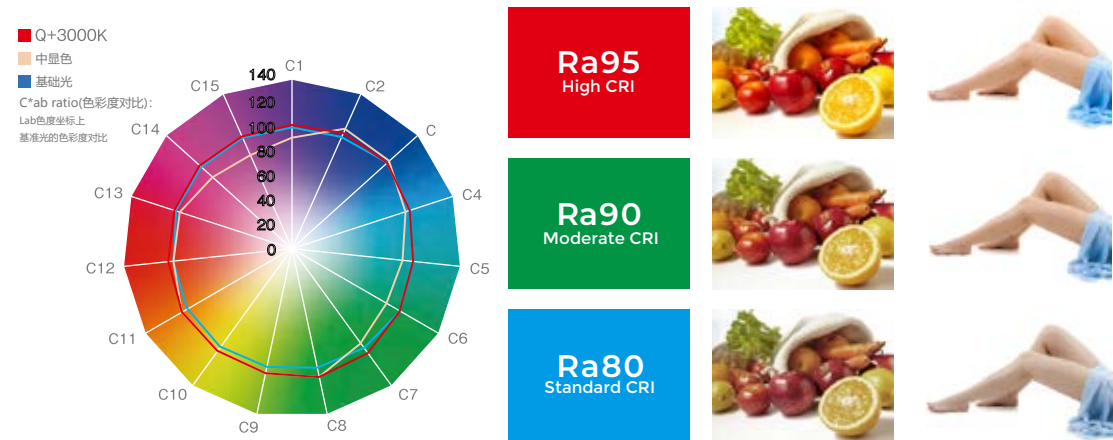


※ The upper left graph shows the comparison of the color saturation between the reference light and the "Quality plus Q+" wavelengths. It has chromaticity performance that exceeds the reference light in all wavelength regions. 左上圖表示基準光和 "Quality plus Q+" 的各波長的色飽和度比較。在所有的波長區域都具有超過基準光的色度表現性能。

TRU COLOUR 全光譜

The Tru Colour spectrum surpasses industry metrics for light quality, giving our LEDs the highest CRI rating in the industry - with a score of up to 99 on CRI levels. However, we have found that CRI is an outdated value. That's why we place more value in our industry leading TM-30 rating of 99.


Tru Colour LEDs incorporate over 1 billion colours within its wavelengths. This provides the optimal lighting balance for your space, an overall sense of wellbeing, and enhances the appearance of interiors-making wood, food, and skin tones appear more natural and lifelike. Make any place magical with Tru Colour illumination

TM-30-15 measures against 99 color samples, all used to provide Fidelity (Rf), Gamut (Rg) and Color Vector Graphics. TM-30-15 針對 99 個顏色樣本進行測量，均用於提供保真度 (Rf)、色域 (Rg) 和彩色矢量圖形。

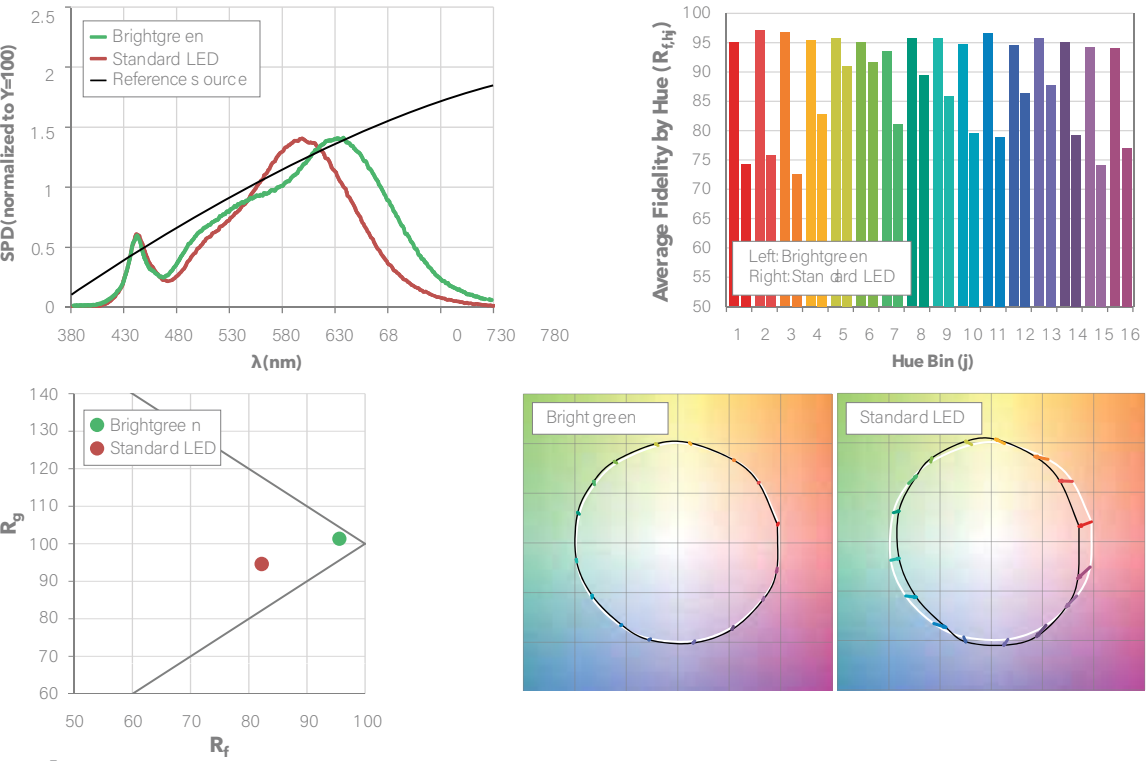

The Difference

We take greater pride in the measurements we achieve on the TM-30 scale. Nevertheless, Tru Colour is the industry leader in both lighting metrics. 我們為我們在 TM-30 規模上取得的測量結果感到更加自豪。然而，Tru Color 在這兩個照明指標方面都是行業領導者

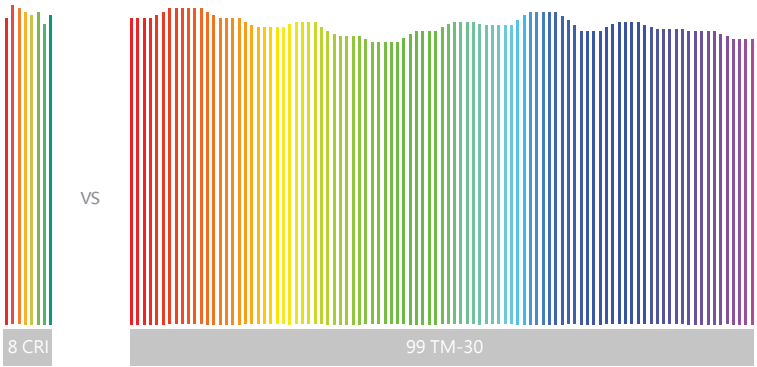

BRAND NEW MODULAR SYSTEM 全新模組化系統



ADOPT NEW DEVELOPED HIGH POWER HIGH EFFICIENCY LED(COB) CHIPS AND LED MODULES CHIPS , WHICH IMPROVES LED LIMINANCE AND EFFICIENCY
採用全新開發的大功率高效LED(COB)芯片和LED模組芯片，提高LED的亮度和效率

USE LOWEST ENERGY CONSUMPTION TO ACHIEVE MAXIMUM LUMINANCE OUTPUT , SO THAT IMPROVETHE OVERALL EFFICIENCY OF LUMINAIRES BY COMBINATION OF PATENT DESIGN OPTICAL LENS AND REFLECTORS
以最低的能耗達到最大的亮度輸出，通過專利設計的光學透鏡和反射器的組合提高燈具的整體效率。

INNOVATIVE SUPER COMFORTABLE LIGHT DISTRIBUTION TECHNOLOGY COMBINED WITH DIRECTIONAL CALCULUS OPTICAL DESIGN, WITH A SHADING ANGLE UP TO 41° STRUCTURE LAYOUT, TO ACHIEVE UGR<10;
創新的超舒適配光技術結合定向微積分光學設計，遮光角高達41°的結構佈局，實現UGR<10；

WITH BEZEL-FREE AND NARROW FRAME COMPONENTS, A VARIETY OF FACE RING ACCESSORIES TO MEET DIFFERENT DECORATION STYLES.
擁有無邊框與窄邊框組件選擇，多種面環配件搭配，滿足不同的裝修風格。


擁有無邊框與窄邊框組件選擇，多種面環配件搭配，滿足不同的裝修風格。




OPTICAL PROCESSING 光學處理

WITH AN EMPHASIS ON VISUAL QUALITY, OUR OPTICS ENSURE SMOOTH, EVEN BEAM DISTRIBUTIONS WITH EXCEPTIONAL OPTICAL CONTROL
強調視覺質量，我們的光學元件通過卓越的光學控制確保平滑、均勻的光束分佈

- SOFT, SMOOTH EDGE
- NO STRIATIONS
- EVEN COLOUR
- 柔軟光滑的邊緣
- 無條紋
- 顏色均勻

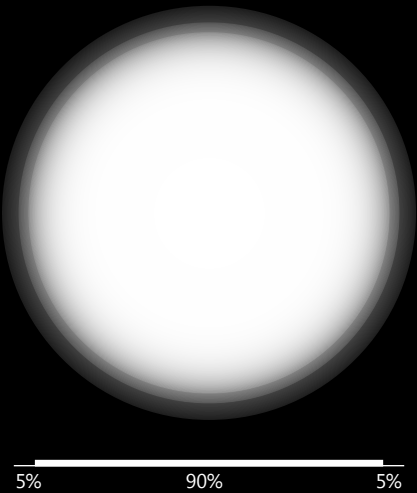


Luminosity intensity

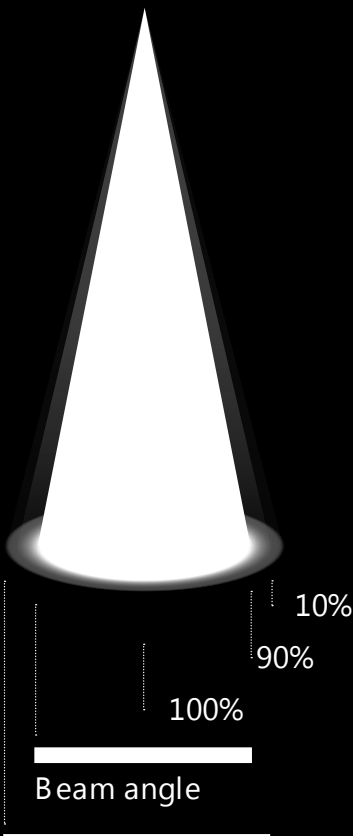

Beam angle

ASYMMETRIC WALLWASH

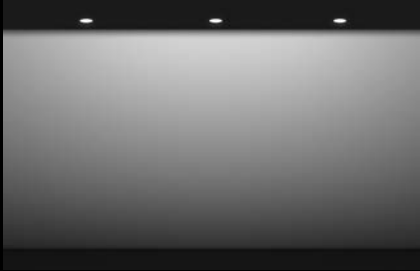

ADJUSTABLE MODEL




NARROW SPOT 8°




NARROW 24°



MEDIUM 38°

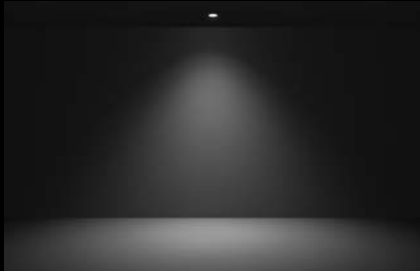

WIDE 60°

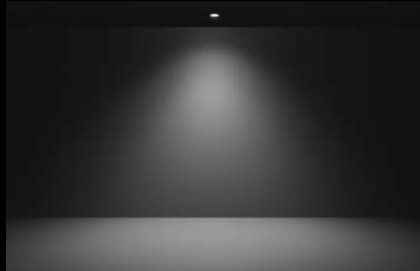

LED STRIPS *SERIES*



GL-2835-125L-5MM



GL-SW2835-120L-8MM



GL-SW2835-224L-10MM



GL-SW2835-320L-24MM



GL-2835-60L-8MM



GL-SW-COB-400-5MM-24V




GL-SW5050-60L-RGB



GL-SW5050-60-RGBW



GL-CH2216-280L



GL-SW2216-CTA240

HIGH VOLTAGE *SERIES*



GL-SW-COB-110V(IP65)



GL-SW-COB-220V(IP65)



GL-SW-2835W60-110V(IP67)



GL-SW-2835W60-230V(IP67)

LINEAR *SERIES*



GL-BW0709



GL-BW1010



GL-BW1010B



GL-BW1010BB



GL-BW1613



GL-BW2613



GL-CH1911K



GL-BW2020B



GL-BW1616C



GL-CH3030C



GL-HO3030K



GL-BW3535



GL-BW4043



GL-BW5035



GL-BW5050



GL-SW2109



GL-SW2409



GL-BW-T30



GL-BW-T60



GL-BW-T120

REFLECTION LINEAR *SERIES*



GL-QSG4118



GL-QSG4118B



GL-QSG3825



GL-QSG3820



GL-QSG4320



GL-QSG8556



GL-QSG8556B



GL-QSG2655



GL-QSG2696



GL-QSG10037



GL-QSG11637



GL-QSG3596



GL-QSG3212B



GL-QSG9214



GL-QSG12055-2525C



GL-QSG7058

FLEXIBLE LINEAR *SERIES*



GL-SW-NFTS1212



GL-SW-NFS1212



GL-SW-NFT1616



GL-SW-NFS1616

SPOT *SERIES*



GL-XW1306



GL-XW1395T



GL-XJE21055A



GL-XJE21075A



GL-XJE12095A

NEW
TZ *SERIES*



GL-TZ-L55Y-1



GL-TZ-L75Y-1



GL-TZ-L95Y-1

EYES TRIMLESS *SERIES*




THIN *SERIES*



POT *SERIES*



FIND *SERIES*

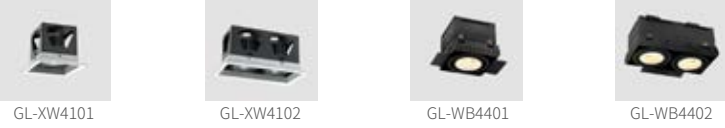

NEW
SIMPLE *SERIES*



TRACK SPOTLIGHT *SERIES*




MIRACLE *SERIES*



DOWNLIGHT WALLWASHER *SERIES*



DOWNLIGHT SPOTLIGHT *SERIES*



ZOOM RECESSED SPOTLIGHT *SERIES*




DIPPER

SERIES

					
GL-XFE0101FS	GL-XFE0103FS	GL-XFE0105FS	GL-XFE0110FS		
					
GL-XFE0101FST	GL-XFE0103FST	GL-XFE0105FST	GL-XFE0110FST		
					
GL-XFE0103AS	GL-XFE0105AS	GL-XFE0110AS	GL-XFE0103AST	GL-XFE0105AST	GL-XFE0110AST
					
GL-XFE0201AS	GL-XFE0203AS	GL-XFE0205AS			


JW MAGNET 48V SYSTEM

SERIES

					
GL-JW2521	GL-JWR035T	GL-JWR045T	GL-JWR055T	GL-JWR065T	GL-JWTJ40T
					
GL-JWTJ50T	GL-JWTJ62T	GL-JWJ-20-6	GL-JWJ-20-12	GL-JWJ-20-18	GL-JWJ-20-24
					
GL-JWT-20-6A	GL-JWT-20-12A	GL-JWT-20-18A	GL-JWJT-12	GL-JWJT-22	GL-JWJT-32
					
GL-JWL-20-300	GL-JWL-20-600	GL-JWL-20-900			


BARRISOL

SERIES

			
GL-SW120	GL-SW576CTA	GL-SW-162RGB	GL-SW-162RGBW



LU MAGNETIC

SERIES

			
GL-LTA165	GL-LTB140	GL-LTC120-6	
			
GL-LUB7517-P-2W	GL-LUB7520-P-1W	GL-LUB7523-P-3W	GL-LUB7527-P-3W

LU SURFACE

SERIES

			
GL-LUB7517-P-2W	GL-LUB7520-P-1W	GL-LUB7523-P-3W	GL-LUB7527-P-3W

NEW
OUT DOOR


SERIES

				
GL-SXH025WP	GL-SXH025WL	GL-ZD2527		
				
GL-TD50903W	GL-TD50907W	TD509010W	GL-BX024	GL-BX001D


PANEL SERIES



PANEL PLC SERIES

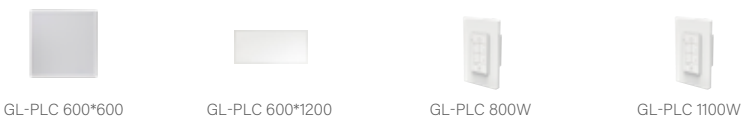

SKYLINE2.0 SERIES

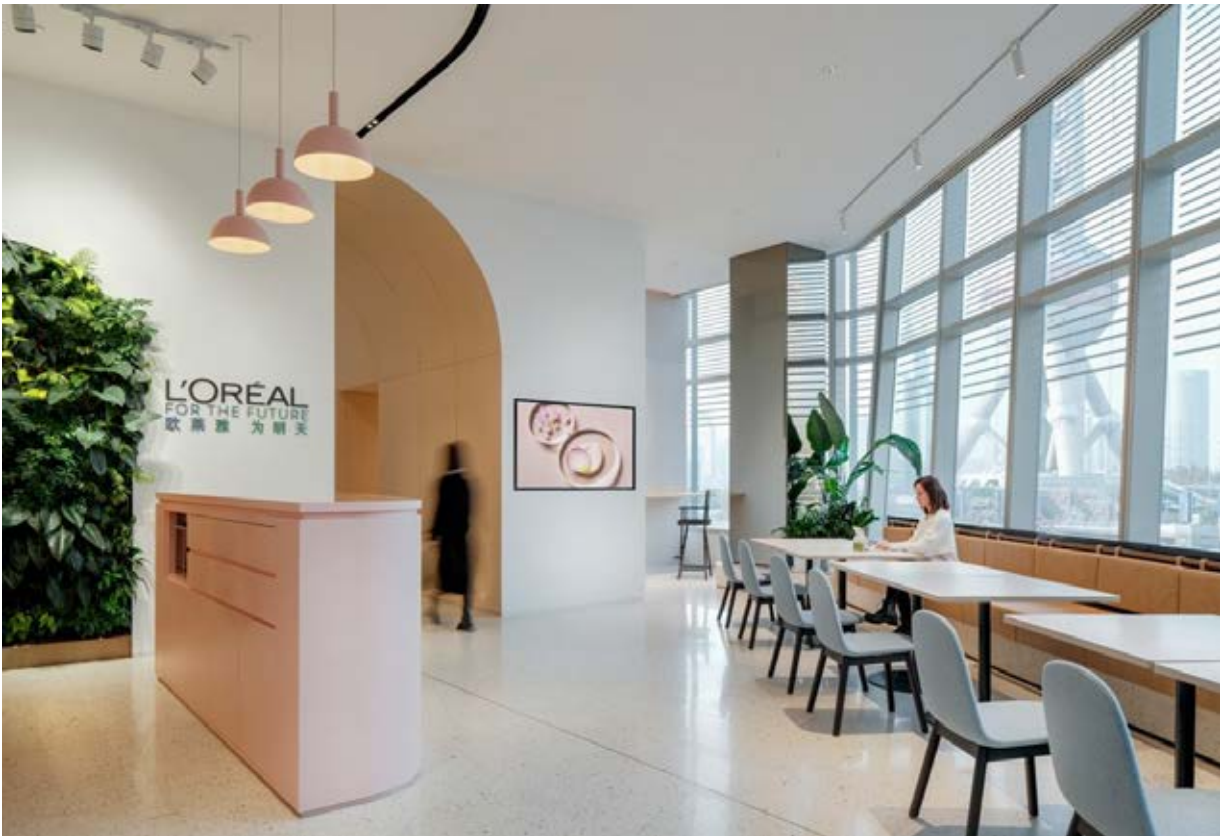

Robarts spaces
L'ORÉAL 歐萊雅辦公室
Shanghai, China




Google Office SH 谷歌上海办公室
Shanghai



THE MICHELIN GUIDE: 3 MICHELIN Star Restaurant
NEW WAVE by DA VITTORIO
UCCA Edge Shanghai



Armada Group
Bonica & La Barra & Mezcaleria & Tacos El Paisa
AUNN Shanghai

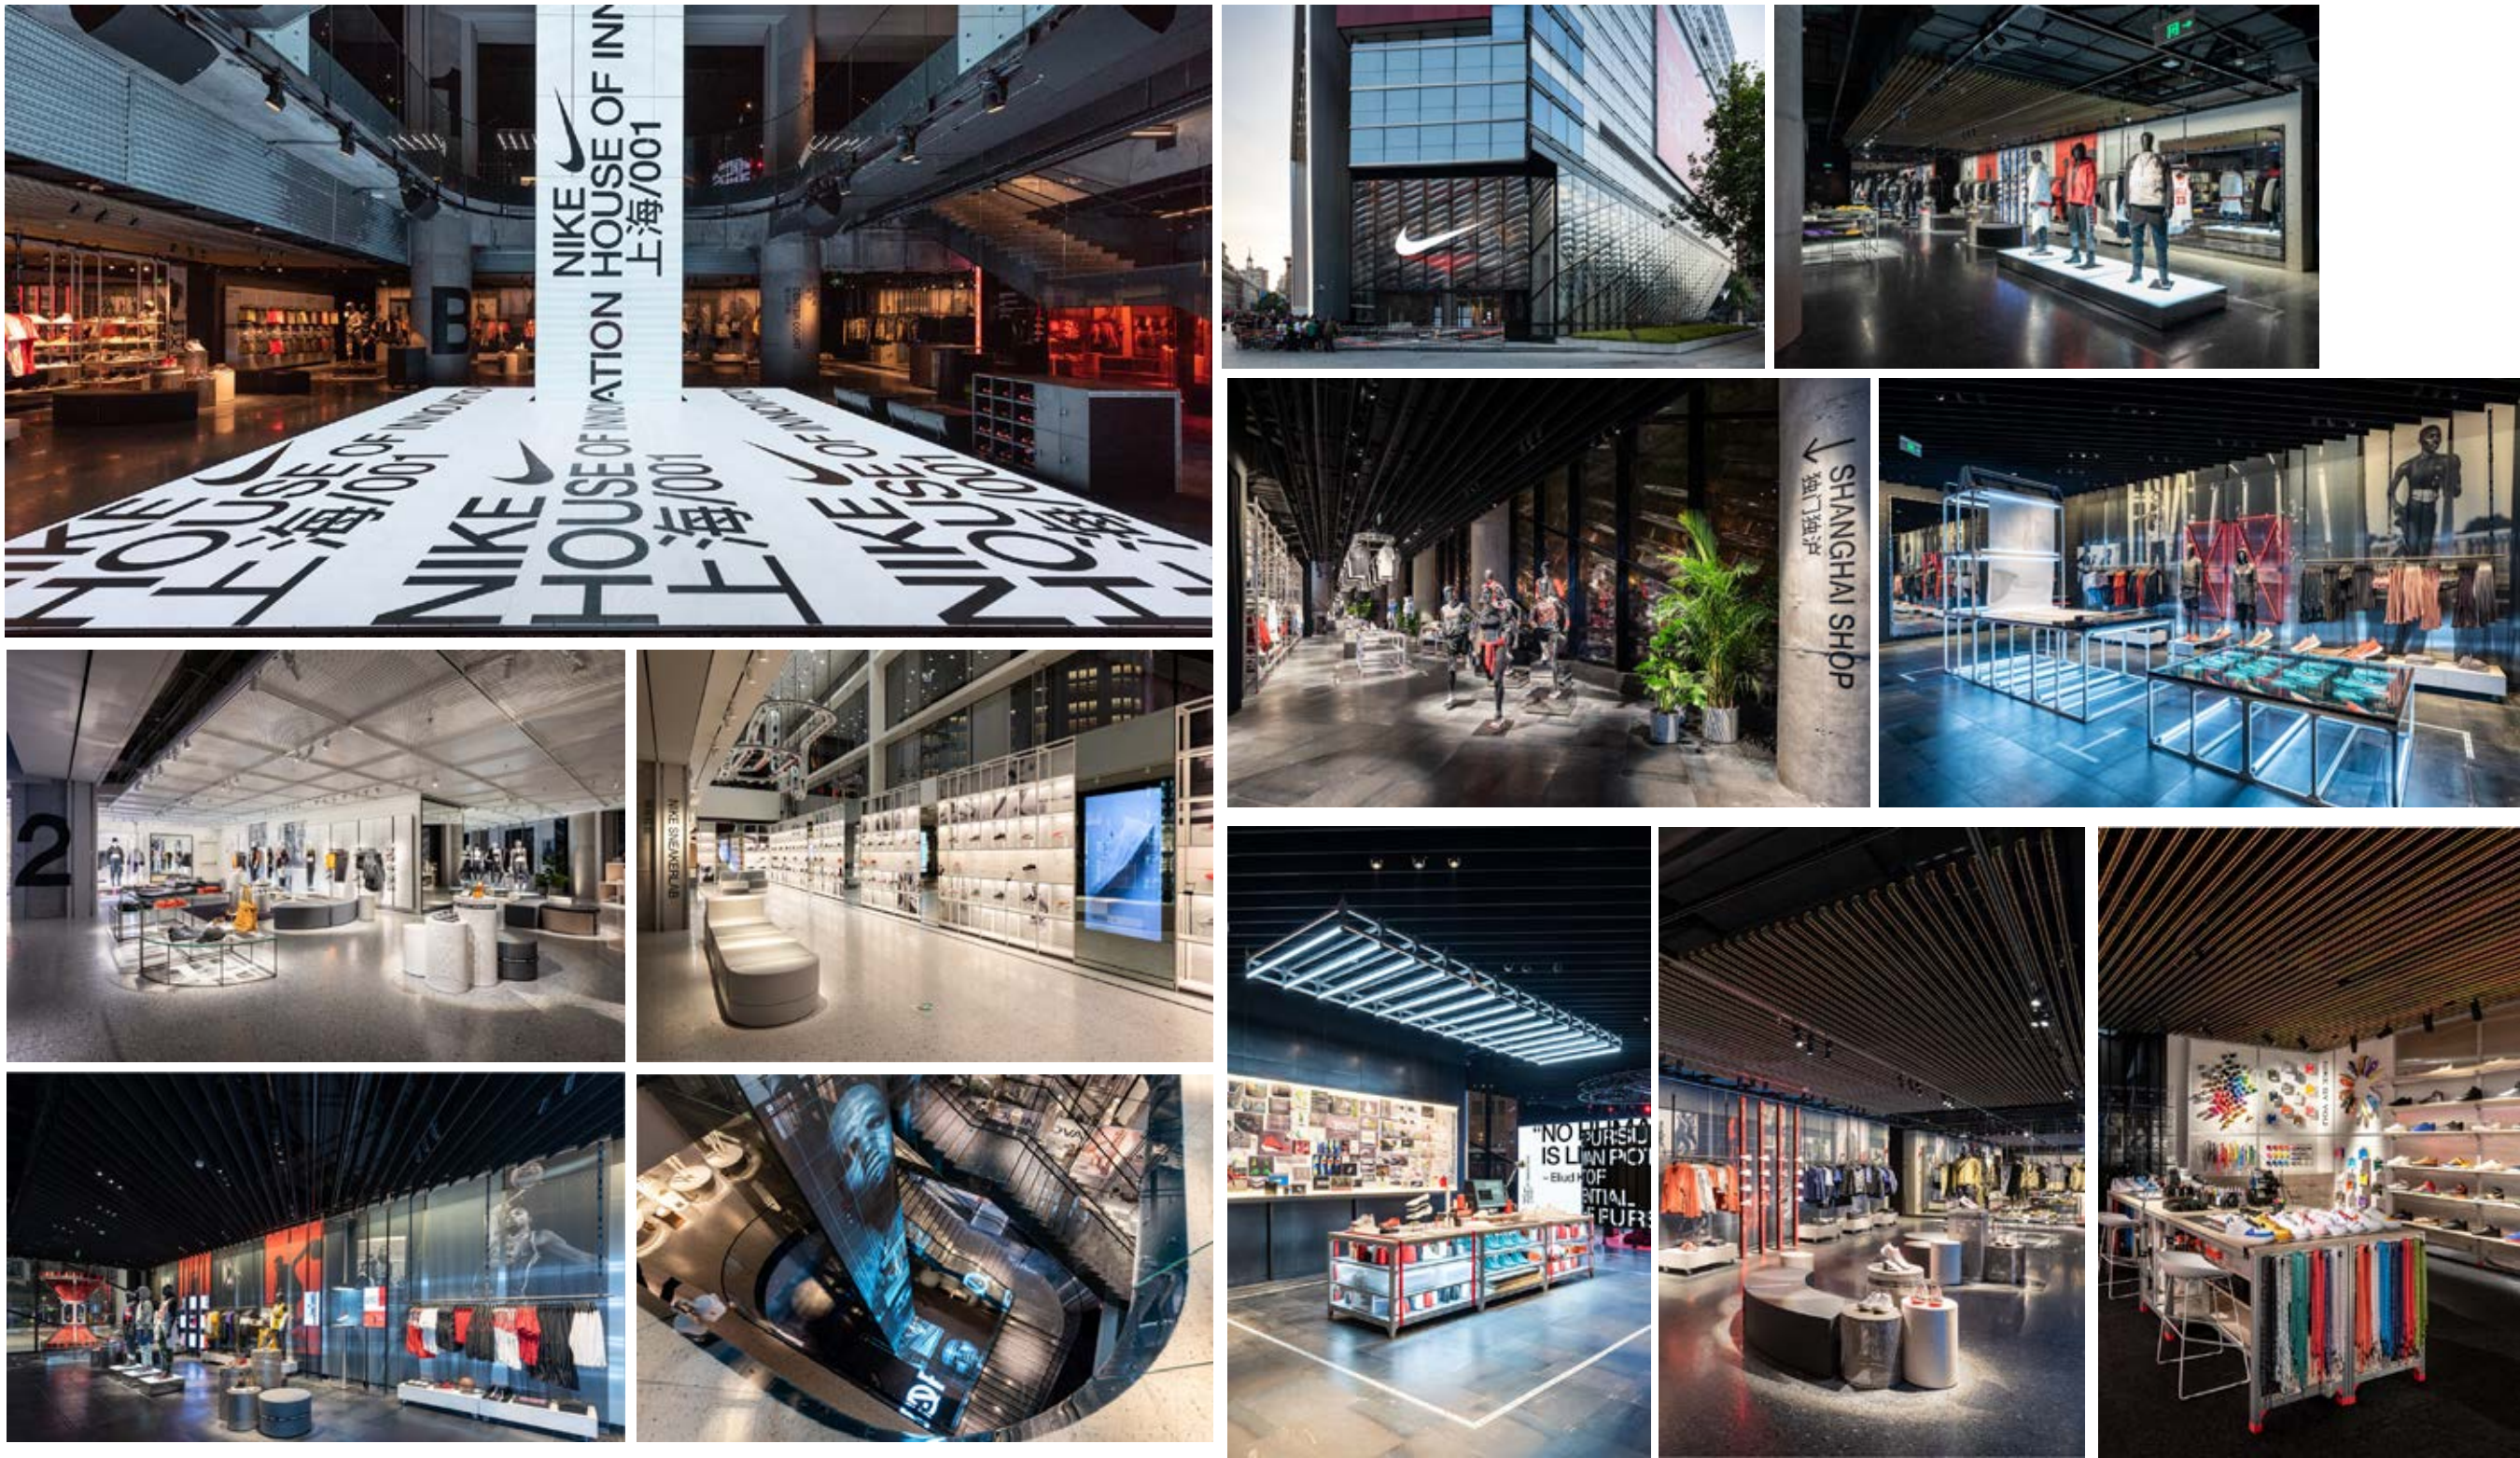

Nike Retail Group, CallisonRTKL & Studio illumine
Nike House of Innovation NIKE上海001
Shanghai, China



Western Academy of Beijing Atrium
WAB Academy 北京京西學院
Beijing



*Black Star Pastry
Shanghai*




Here creates interiors & design
ROODOODOO by Paul Pairet 滬嘟嘟
Shanghai, China





LUKSTUDIO
EMME
Shanghai

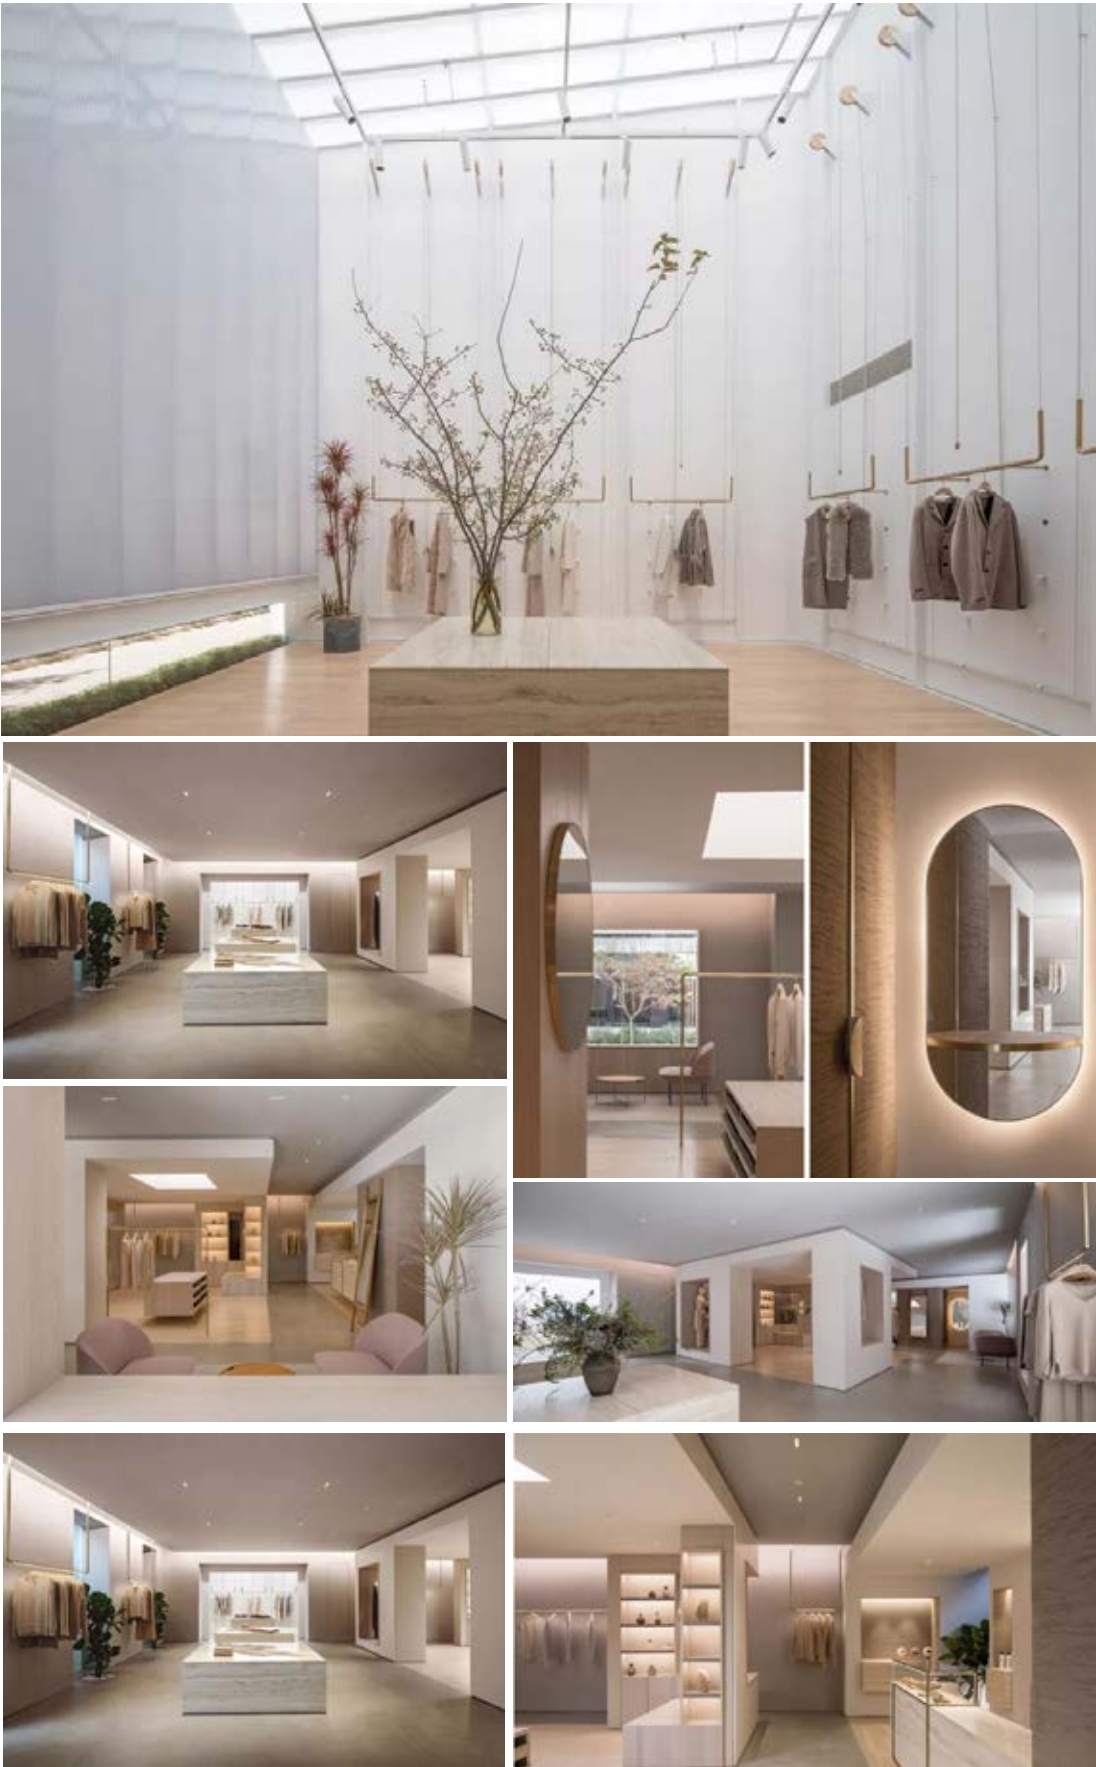




StudioX4 乘四建築
Self-Revealing 隱世修煉
Taipei, Taiwan




*Bain Capital 貝恩資本
Shanghai*





*ABBOTT 雅培
Shanghai*

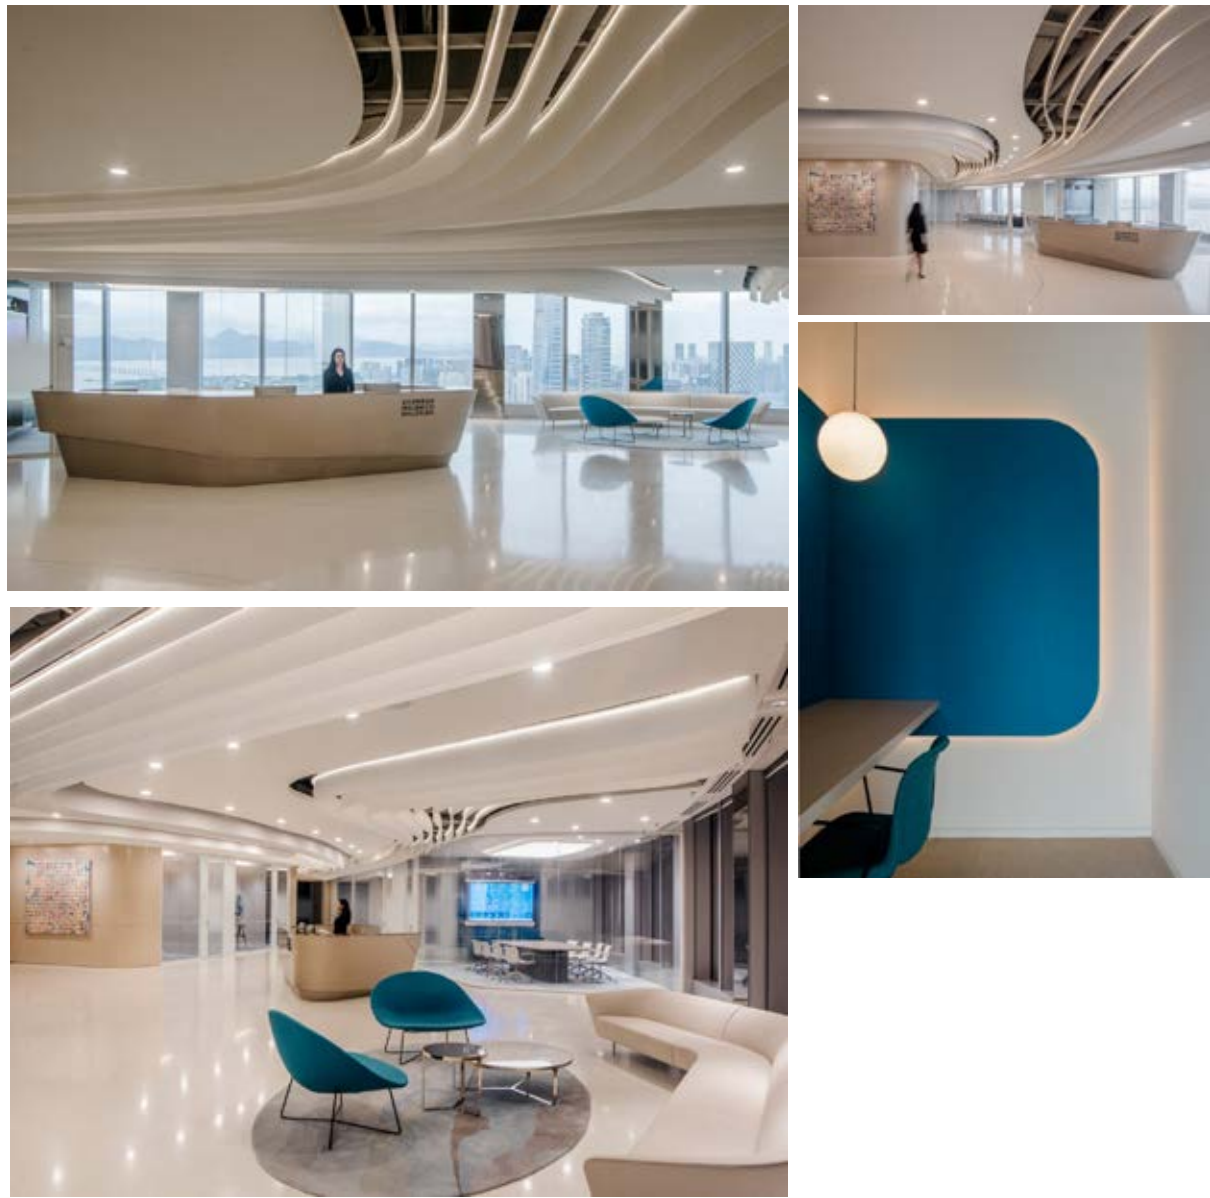

*King & Wood Mallesons 金杜律師事務所
Shenzhen*

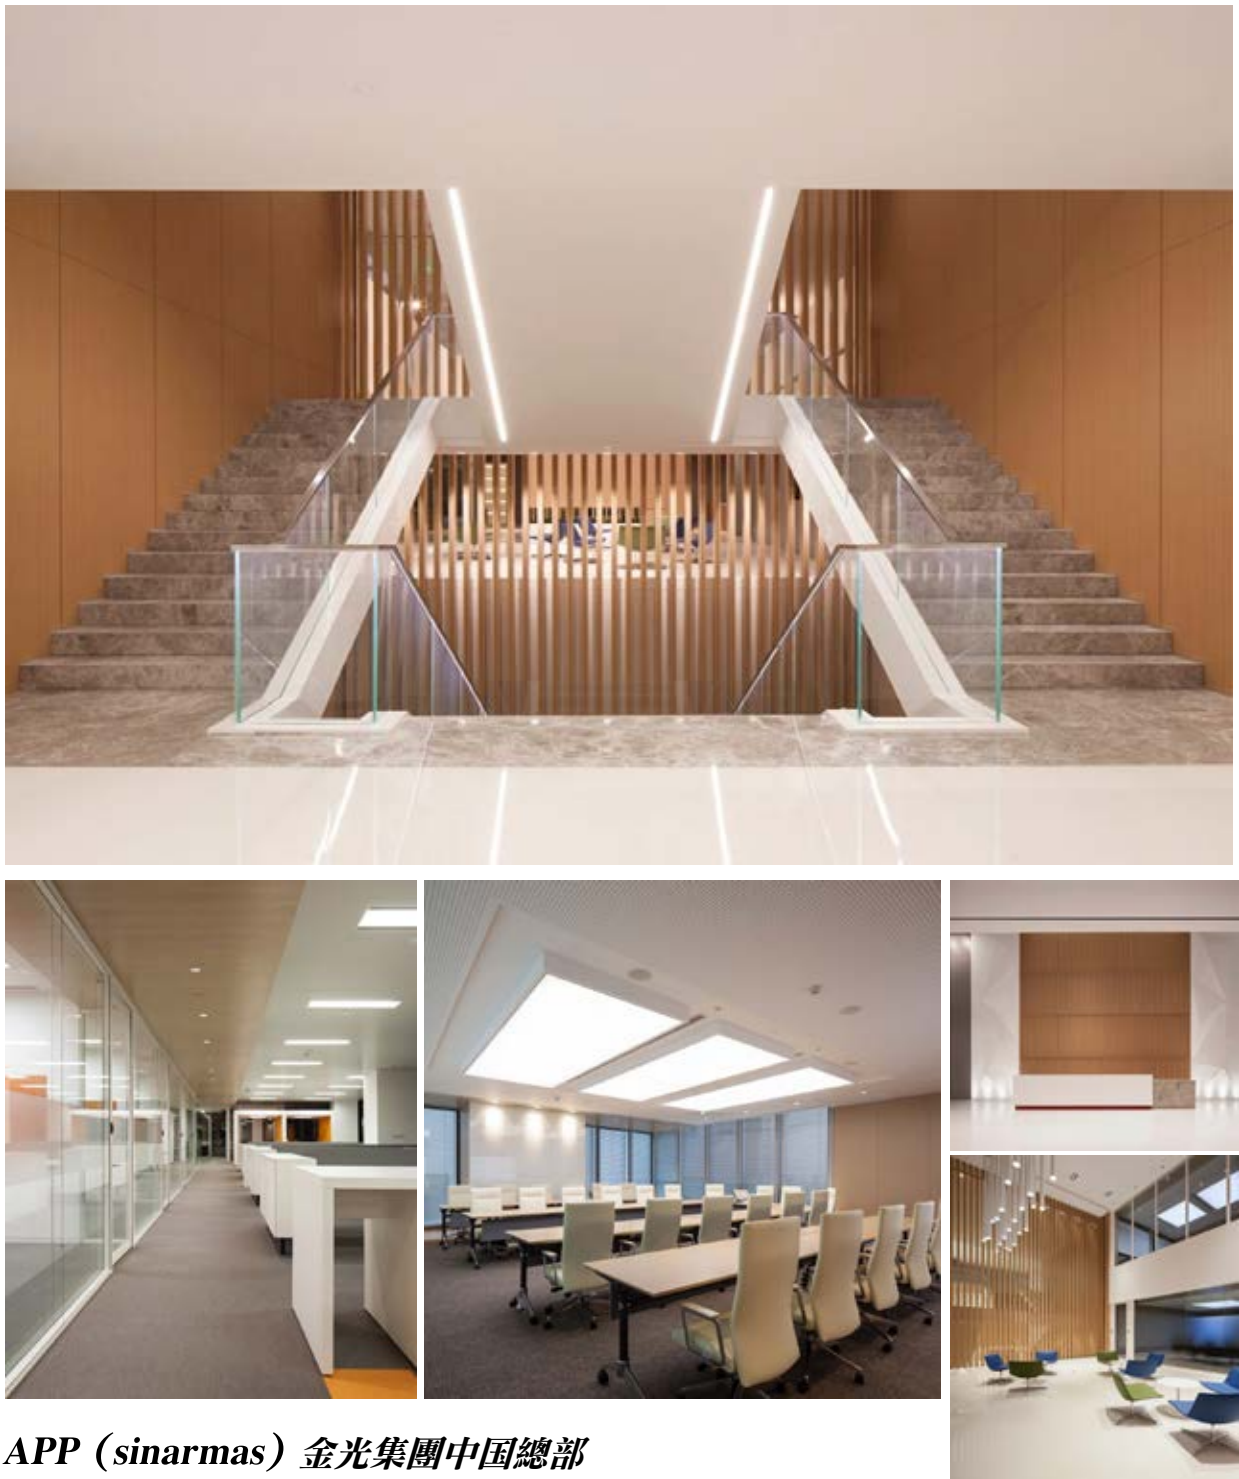


*APP (sinarmas) 金光集團中國總部
Shanghai*

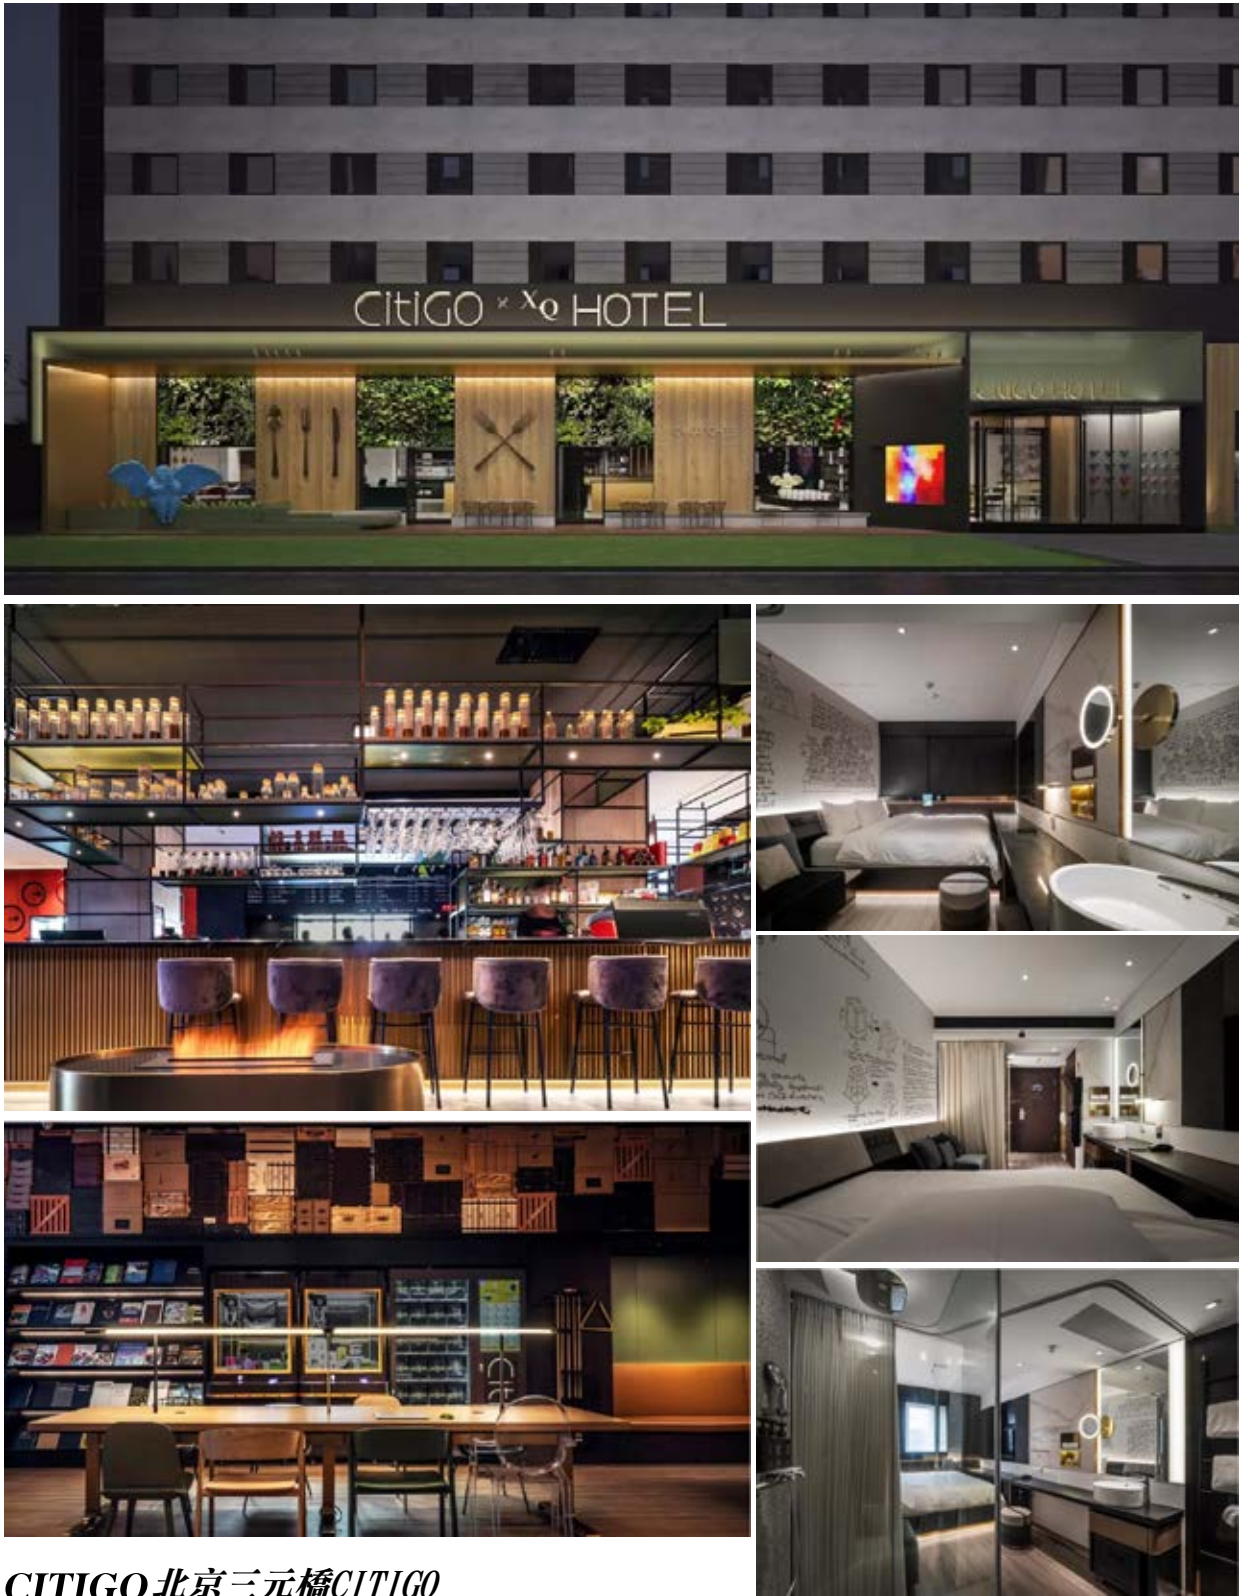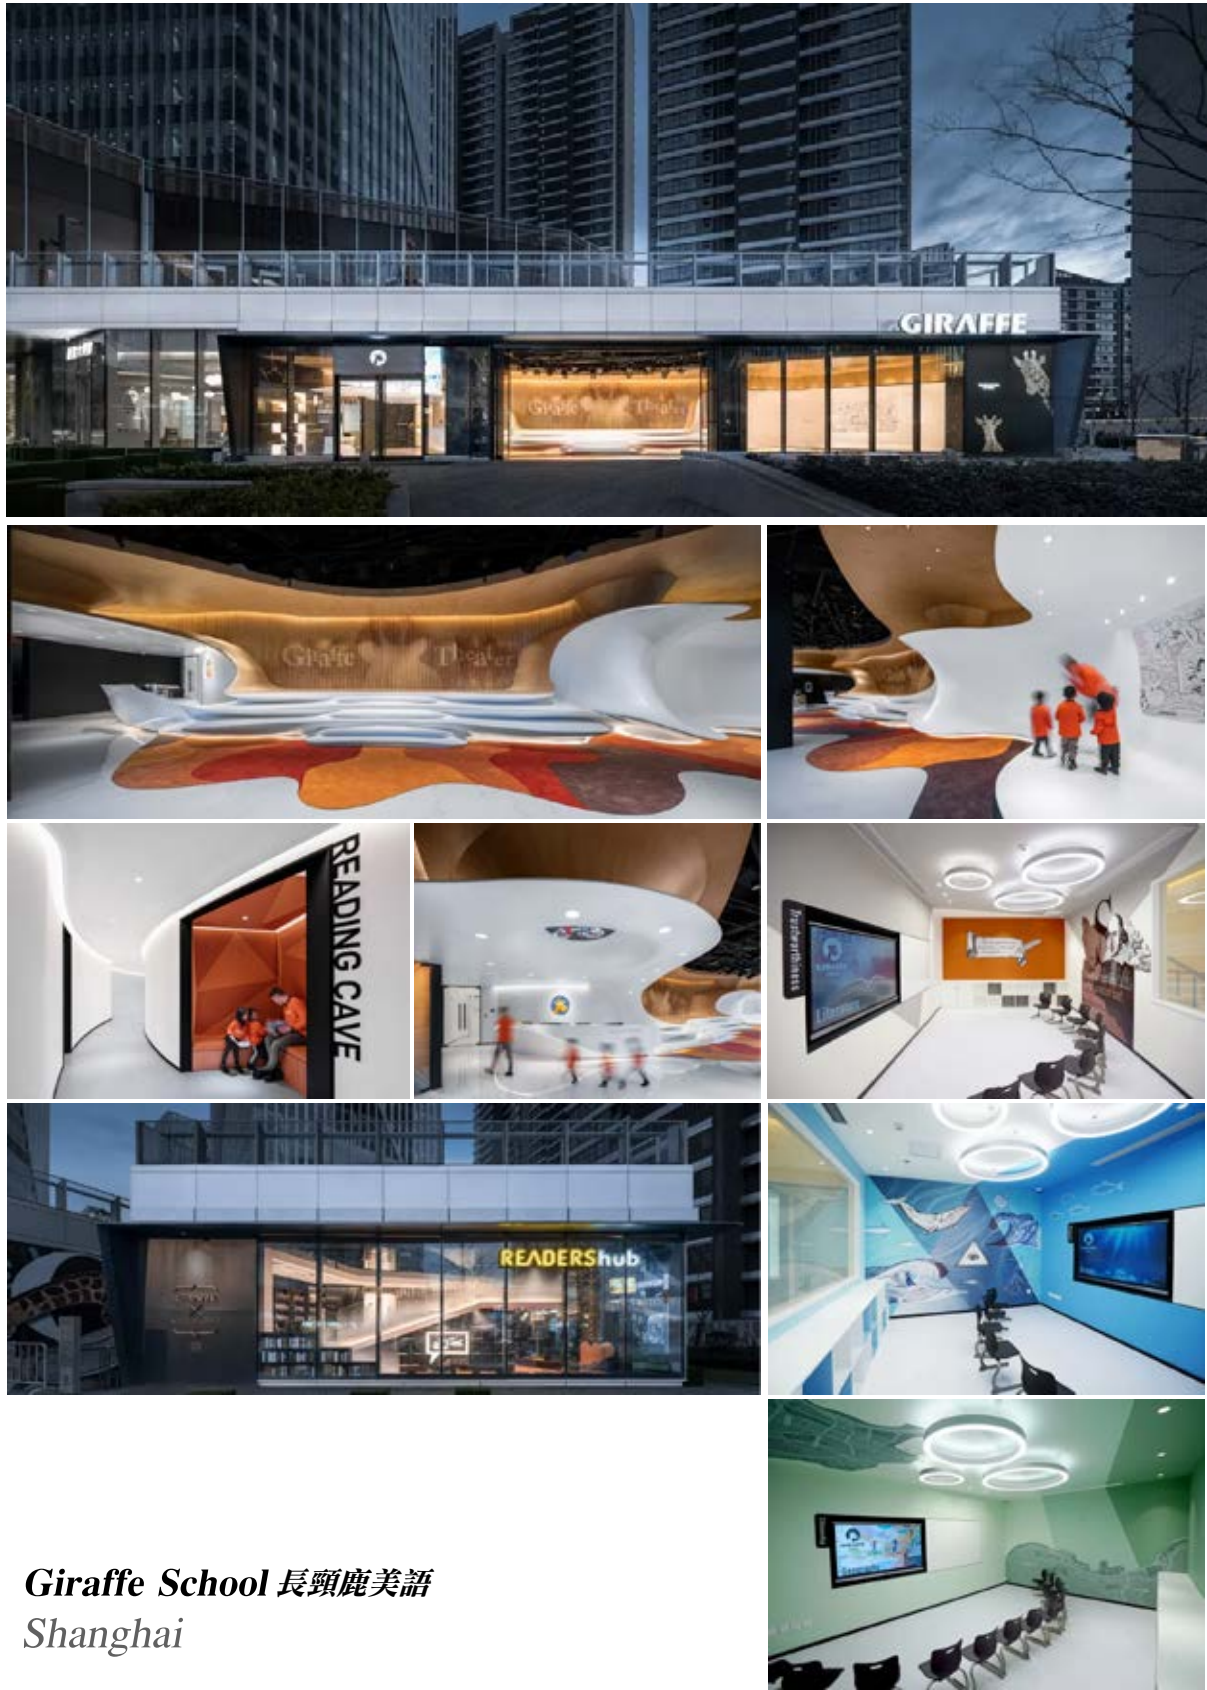




朱周空間設計
BodyConcept Pilates Studio 普拉提工作室
Shanghai

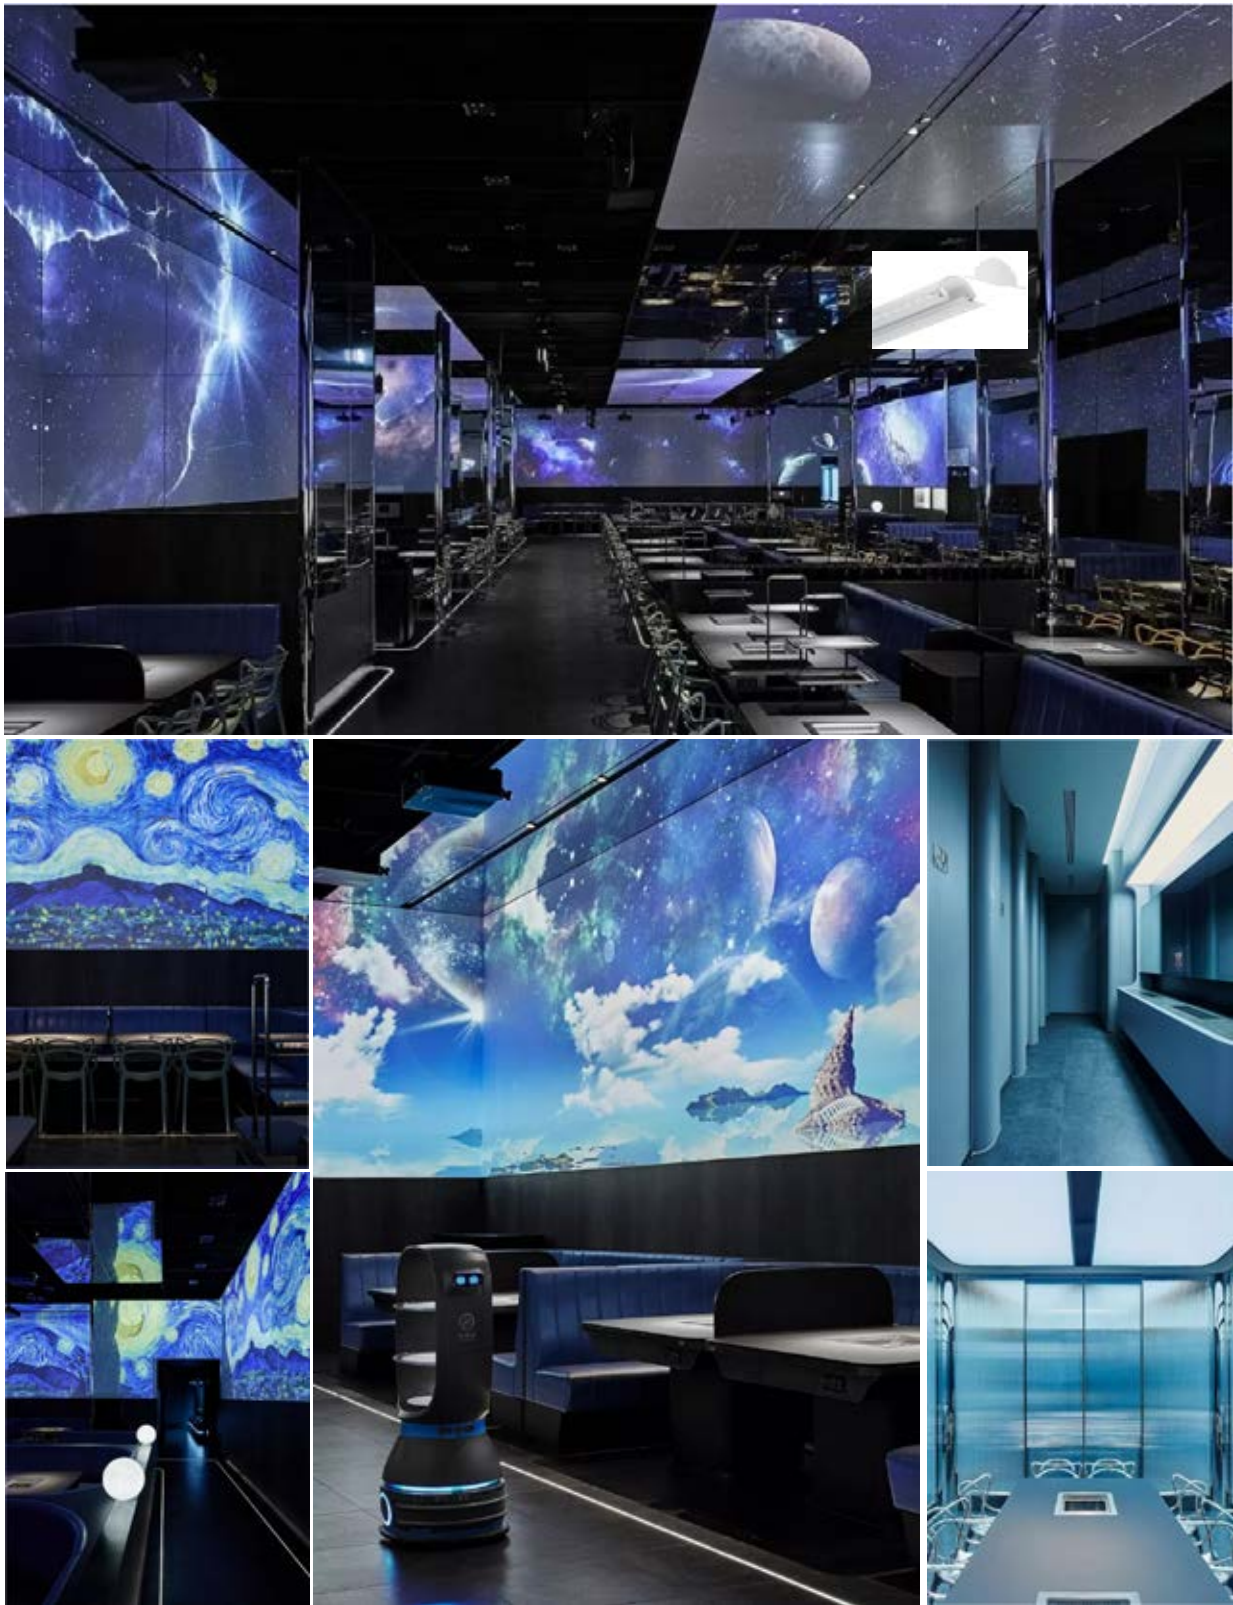


朱周空間設計
Haidilao Smart Restaurant 海底撈智慧餐廳
Beijing



Sculptor barber
Taipei, Taiwan

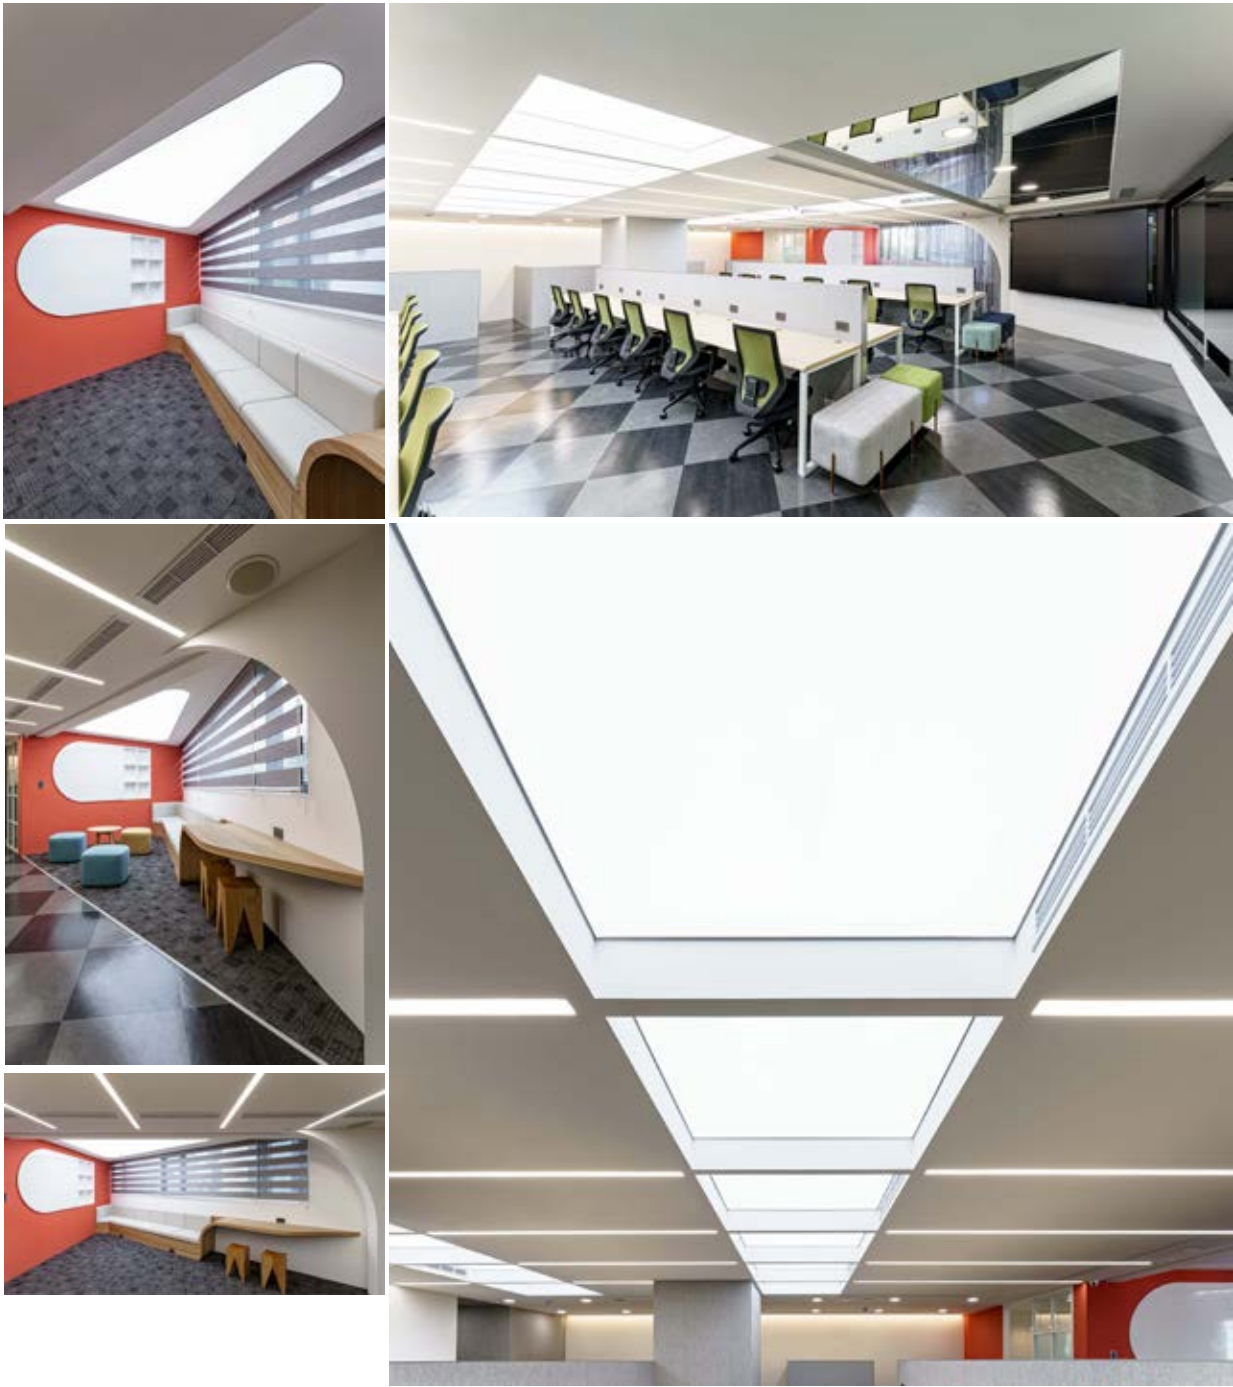

Pailey Interior Design
FamilyMart office 全家便利商店辦公室
Taipei, Taiwan

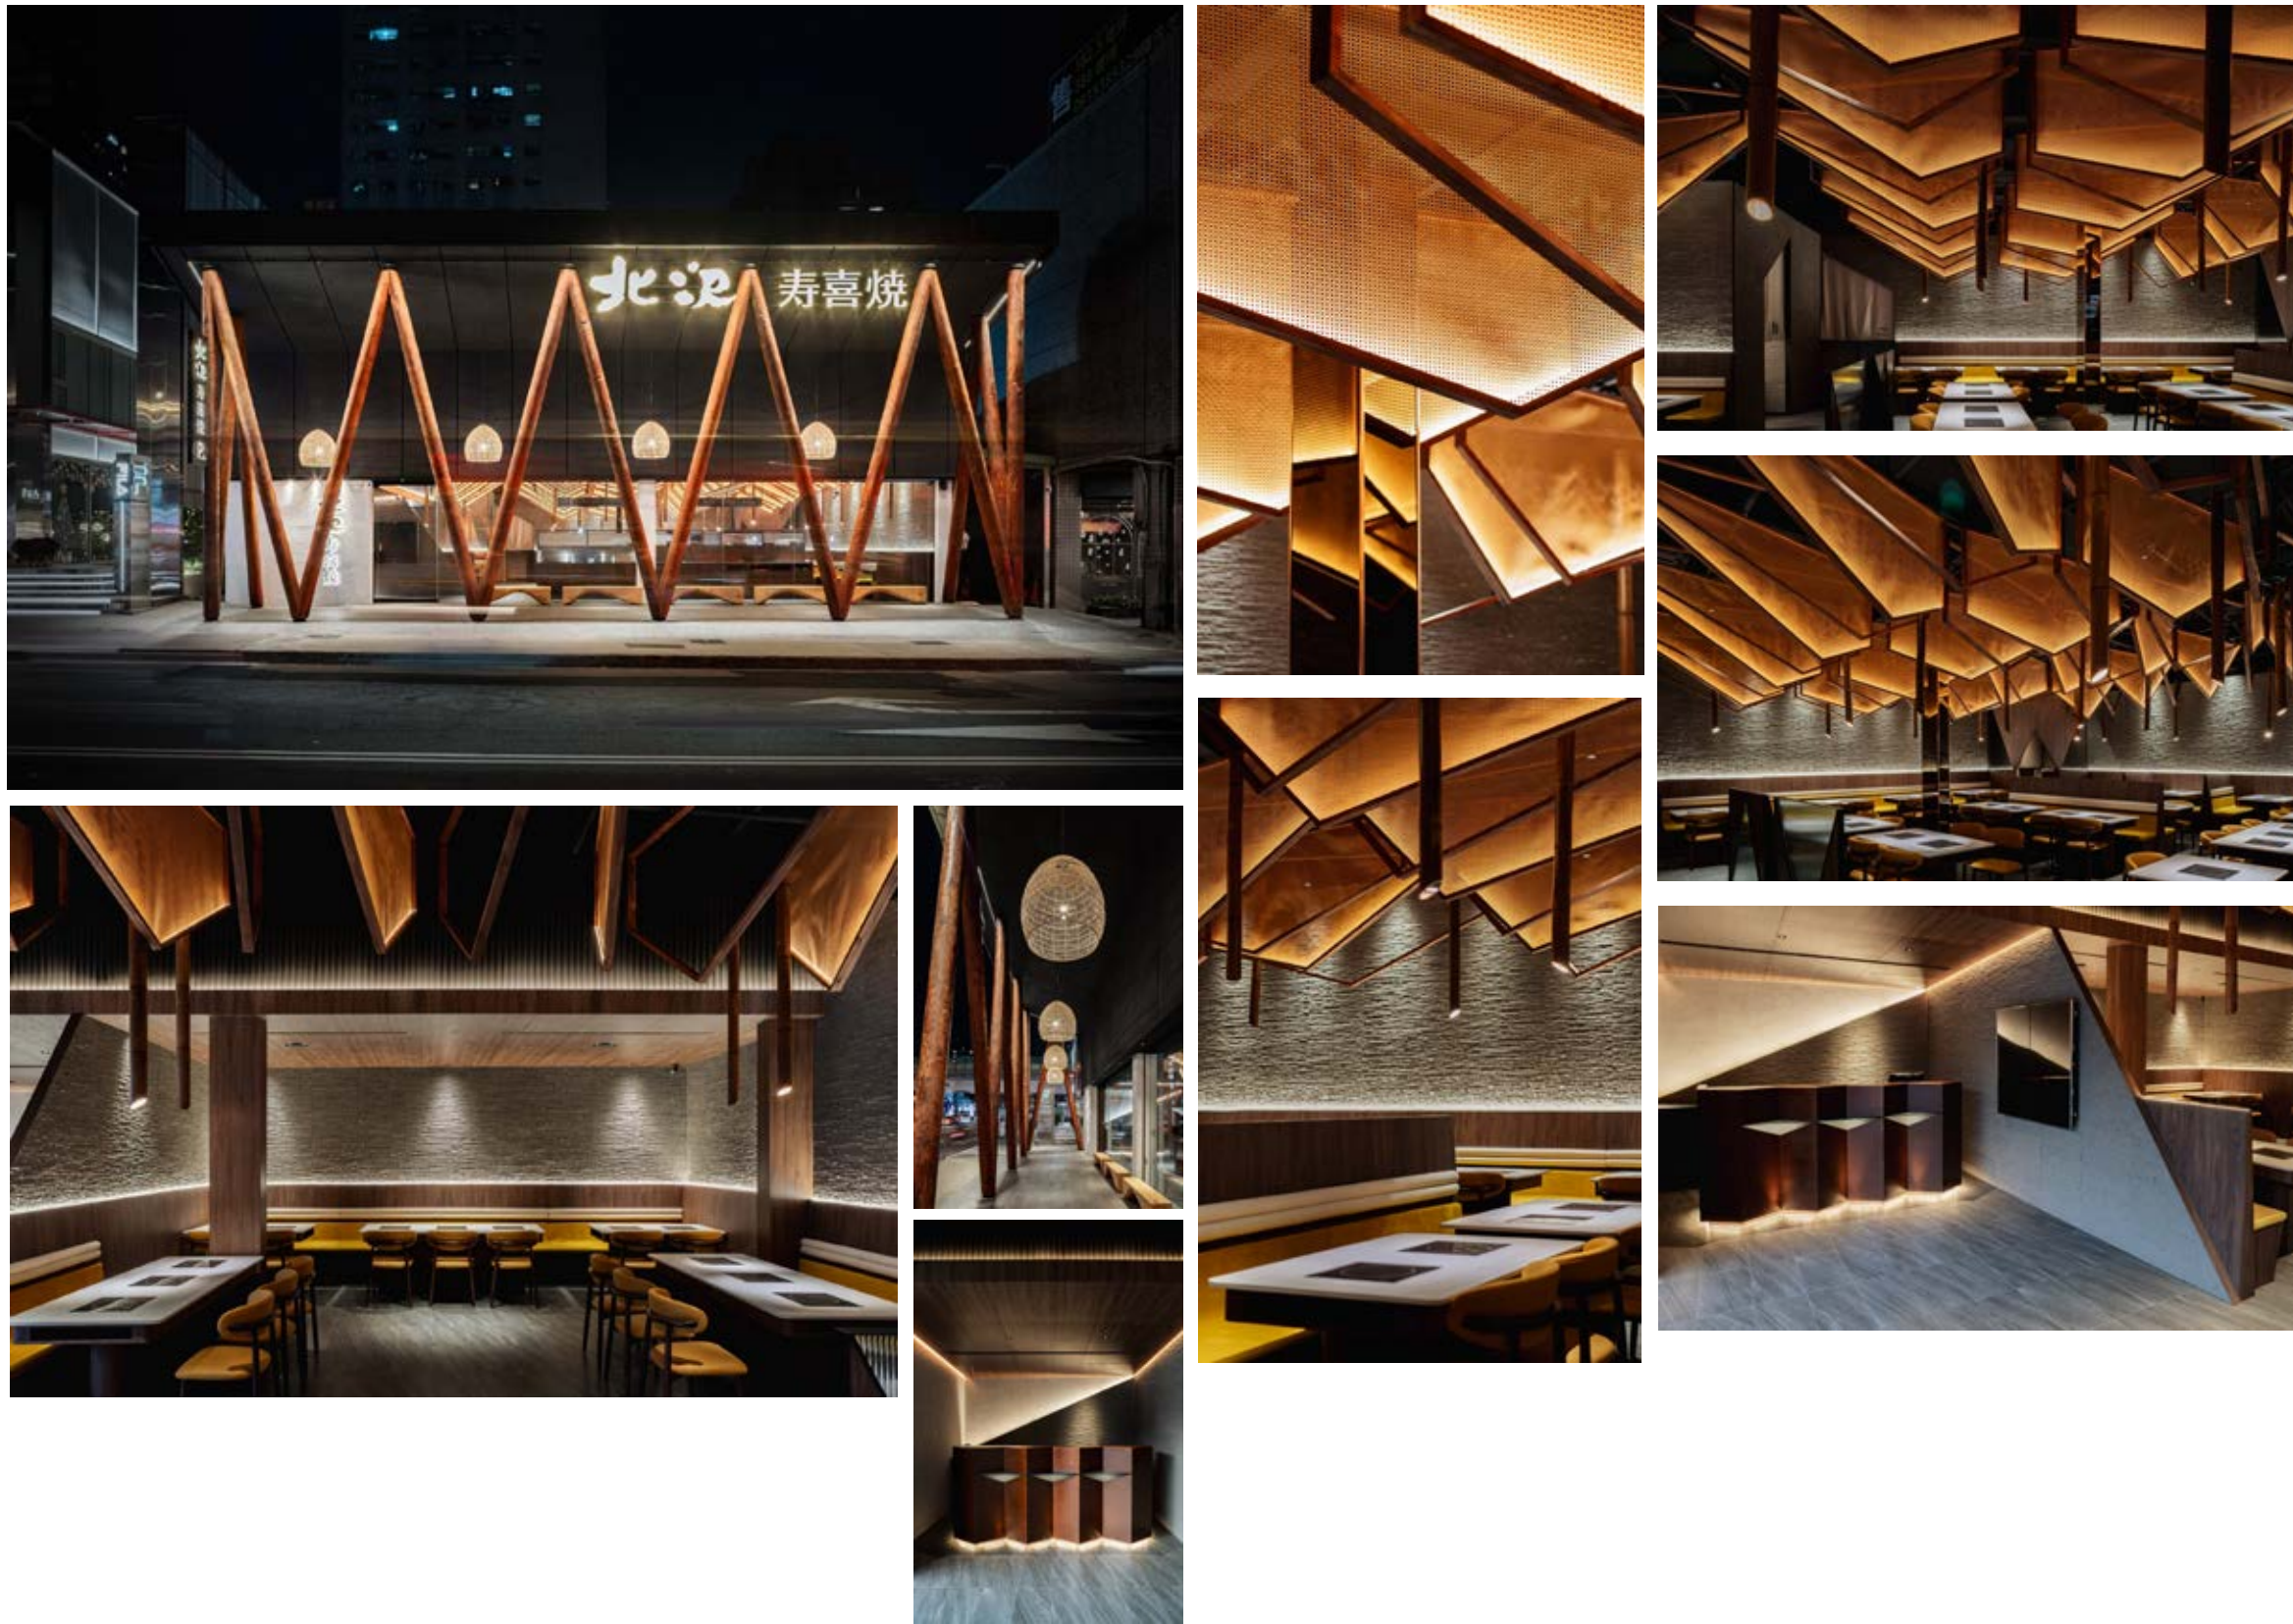

Sky eye league 晴天見設計
北澤壽喜焼
Taichung, Taiwan



Sky eye league 晴天見設計
CHUN XI 春囍打邊爐
Taichung, Taiwan

LED STRIPS

The adoption of American CREE chip, which already passed relevant certification department test and reached the international standards. Adopting automatic assembly line and high standard production process to complete assembly. Providing different powers, color temperature to meet customer needs. IP20, IP65 protection range is available. Passed CE, ROHS, CCC and other certifications. 採用美國CREE芯片，已通過相關認證部門測試，達到國際標準。採用自動化流水線和高標準生產工藝完成組裝。提供不同功率、色溫以滿足客戶需求。可選擇IP20、IP65的防水防塵範圍。通過了CE、ROHS、CCC等認證。



WIRE

Available to customize the wire with one end or dual ends



PRINT

Available to customize the content and print on the FPC



LENGTH

Available to customize the length within the maximum supporting range



COLOR

Available to customize the color



IP

Available to customize the IP Rating




CRI

Available to customize the CRI range



GL-2835-125L-5MM LED裸板一燈一剪燈帶




功率 Watts	5W / 9.6W (Meter)
色溫 Color temperature	2700K / 3000K / 3500K / 4000K / 5000K
光效 Light efficiency	90lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	N/A
Available	Dimmable IP20 IP65 CE CB IP20 IP65
ON/OFF	
TRIAC	
0-10V	
DALI	
PLC	

GL-2835-60L-8MM LED 3D裸板燈帶




功率 Watts	11.52W (Meter)
色溫 Color temperature	2700K / 3000K / 3500K / 4000K / 5000K
光效 Light efficiency	74.7lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	D24V
顏色 Color	N/A
Available	Dimmable IP20 CE CB IP20
ON/OFF	
TRIAC	
0-10V	
DALI	
PLC	

GL-SW2835-120L-8MM LED裸板燈帶



功率 Watts	14.4W (Meter)
色溫 Color temperature	2700K / 3000K / 3500K / 4000K / 5000K
光效 Light efficiency	80lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	N/A
Available	Dimmable IP20 IP65 CE CB IP20 IP65
ON/OFF	
TRIAC	
0-10V	
DALI	
PLC	

GL-SW-COB-400-5MM-24V LED COB裸板燈帶




功率 Watts	10W (Meter)
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	60lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	D24V
顏色 Color	N/A
Available	Dimmable IP20 CE CB IP20
ON/OFF	
TRIAC	
0-10V	
DALI	
PLC	

GL-SW2835-224L-10MM LED裸板燈帶



功率 Watts	20.16W (Meter)
色溫 Color temperature	3000K / 3500K / 4000K / 5000K
光效 Light efficiency	150lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	N/A
Available	Dimmable IP20 CE CB IP20
ON/OFF	
TRIAC	
0-10V	
DALI	
PLC	


GL-SW2835-320L-24MM LED裸板燈帶



功率 Watts	33.3W(Meter)
色溫 Color temperature	2700K / 3000K / 3500K / 4000K / 5000K
光效 Light efficiency	130lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	N/A
Available	Dimmable IP20 CE CB IP20
ON/OFF	
TRIAC	
0-10V	
DALI	
PLC	

GL-SW5050-60L-RGB


LED裸板燈帶 (RGB)



功率 Watts	14.4W (Meter)
色溫 Color temperature	RGB
光效 Light efficiency	N/A
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V / DC12V(OPTIONS)
顏色 Color	N/A
Available	Dimmable RGB IP20 IP65 CE CB IP20 IP65
ON/OFF	
DMX	
DALI	
PLC	

GL-SW3838-240L-RGBW


LED裸板燈帶(RGBW)



功率 Watts	19.2W (Meter)
色溫 Color temperature	RGBW (W:3000K/4000K/6000K)(OPTIONS)
光效 Light efficiency	N/A
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	N/A
Available	Dimmable RGBW IP20 IP65 CE CB IP20 IP65
ON/OFF	
DMX	
DALI	
PLC	

GL-CH2216-280L-5MM-24V


LED雙色溫裸板燈帶



功率 Watts	9.6W (Meter)
色溫 Color temperature	2700K-6000K
光效 Light efficiency	N/A
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	N/A
Available	Dimmable Tunable white IP20 IP65 CE CB IP20 IP65
ON/OFF	
0-10V	
DALI	
PLC	

GL-SW2216-CTA240-10MM

LED雙色溫裸板燈帶



功率 Watts	22W (Meter)
色溫 Color temperature	2700K-6000K
光效 Light efficiency	70lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	N/A
Available	Dimmable Tunable white IP20 IP65 CE CB IP20 IP65
ON/OFF	
0-10V	
DALI	
PLC	



HIGH VOLTAGE

GREAT LIGHTING




ADVANTAGE





IC 高品質高壓線性IC，恆定LED工作電流

(over temperature protection)consistent current from the head to the tail (過溫保護) 頭尾電流一致

High luminous quality,same brightness from the head to the tail.
高效流明質量，首尾亮度一致

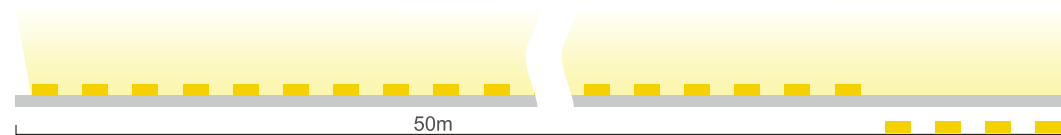

Extrusion hollow molding technology , inside arc and outside square structure, strong pressure resistance.
擠壓中空成型技術，內圓弧外方結構，抗壓能力強
UV resistance, uniform light emission, high temperture resistance , yellowing resistance , good heat dissipation,flame retardant and good flexibility
抗紫外線、發光均勻、耐高溫、耐黃變、散熱性好、阻燃、柔韌性好



VDE rubber cablew with safety cartificate , double insulation much safer, integrated waterproof design.
VDE 橡膠電纜帶安全盒，雙重絕緣更安全，一體化防水設計




GL-SW-COB-110V(IP65)

LED高壓燈帶



功率 Watts	12W (Meter)
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	93.2lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥80
電壓 Voltage	AC 110V
顏色 Color	N/A
Available ON/OFF	 IP65
CE CB   IP 65	

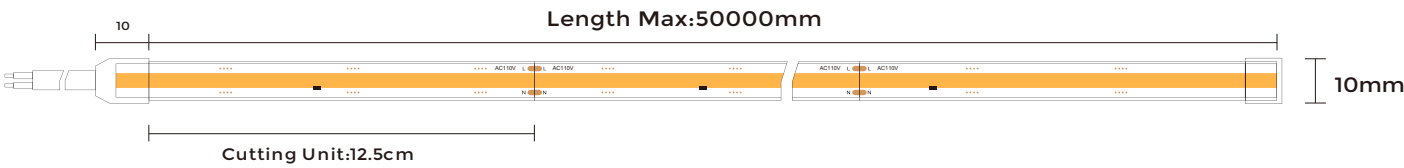


GL-SW-COB-220V(IP65)

LED高壓燈帶



功率 Watts	12W (Meter)
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	93.2lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥80
電壓 Voltage	AC 220V
顏色 Color	N/A
Available ON/OFF	 IP65
CE CB   IP 65	

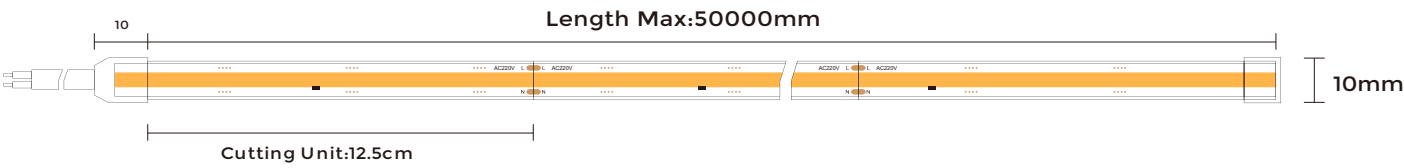


GL-SW-2835W60-110V(IP67)

LED擠出型高壓燈帶



功率 Watts	10W (Meter)
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	93.2lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	AC 110V
顏色 Color	N/A
Available ON/OFF	 IP67
CE CB   IP 67	

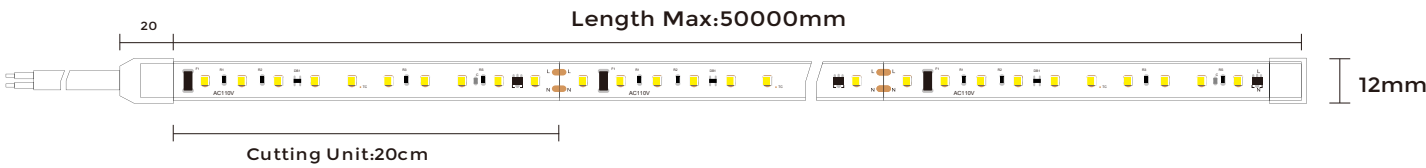


GL-SW-2835W60-230V(IP67)

LED高壓燈帶



功率 Watts	10W (Meter)
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	93.2lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	AC 220V
顏色 Color	N/A
Available ON/OFF	 IP67
CE CB   IP 67	

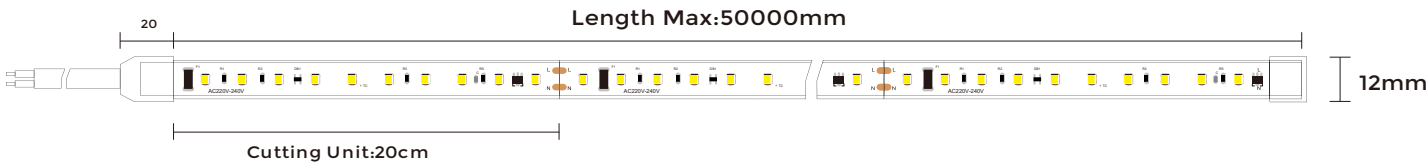




INEAR
SERIES

GL-BW0709

LED線型燈




功率 Watts	5W / 9.6W / 10W (Meter)
色溫 Color temperature	3000K / 4000K / 2700K-6000K
光效 Light efficiency	65lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	AI ☐ WH ☐
Available	
ON/OFF	☐ Dimmable ☐ Tunable white
TRIAC	
0-10V	
DALI	
PLC	



GL-BW1010

LED線型燈





功率 Watts	5W / 9.6W / 10W (Meter)
色溫 Color temperature	3000K / 4000K / 2700K-6000K
光效 Light efficiency	65lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	AI ☐ WH ☐
Available	
ON/OFF	☐ Dimmable ☐ Tunable white
TRIAC	
0-10V	
DALI	
PLC	



GL-BW1010B

LED線型燈




功率 Watts	5W / 9.6W / 10W (Meter)
色溫 Color temperature	3000K / 4000K / 2700K-6000K
光效 Light efficiency	65lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	AI ☐ WH ☐
Available	
ON/OFF	☐ Dimmable ☐ Tunable white
TRIAC	
0-10V	
DALI	
PLC	



GL-BW1010BB

LED線型燈




功率 Watts	5W / 9.6W / 10W / 11.52W / 14.4W (Meter)
色溫 Color temperature	3000K / 4000K / 2700K-6000K
光效 Light efficiency	65lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	AI ☐ WH ☐
Available	
ON/OFF	☐ Dimmable ☐ Tunable white
TRIAC	
0-10V	
DALI	
PLC	



Physical profile samples are available upon request for precise slotting.
可先索取實體型材樣品，以便精準開槽。

GL-BW1613

LED線型燈




功率 Watts	5W / 9.6W / 10W / 11.52W / 14.4W (Meter)
色溫 Color temperature	3000K / 4000K / 2700K-6000K
光效 Light efficiency	65lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	AI ☐ WH ☐
Available	
ON/OFF	☐ Dimmable ☐ Tunable white
TRIAC	
0-10V	
DALI	
PLC	



GL-BW2613

LED線型燈




功率 Watts	5W / 9.6W / 10W / 11.52W / 14.4W (Meter)
色溫 Color temperature	3000K / 4000K / 2700K-6000K
光效 Light efficiency	65lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	AI ☐ WH ☐
Available	
ON/OFF	☐ Dimmable ☐ Tunable white
TRIAC	
0-10V	
DALI	
PLC	



GL-CH1911K

LED線型燈




功率 Watts	14.4W / 19.2W / 20.16W / 22W (Meter)
色溫 Color temperature	3000K / 4000K / 2700K-6000K / RGB(W)
光效 Light efficiency	65lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	AI ☐ WH ☐
Available	
ON/OFF	☐ Dimmable ☐ Tunable white ☐ RGBW
TRIAC	
0-10V	
DALI	
PLC	



GL-BW2020B

LED線型燈




功率 Watts	14.4W / 19.2W / 20.16W / 22W (Meter)
色溫 Color temperature	3000K / 4000K / 2700K-6000K / RGB(W)
光效 Light efficiency	65lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	AI ☐ WH ☐
Available	
ON/OFF	☐ Dimmable ☐ Tunable white ☐ RGBW
TRIAC	
0-10V	
DALI	



Physical profile samples are available upon request for precise slotting.
可先索取實體型材樣品，以便精準開槽。


GL-BW1616C LED線型燈



功率 Watts	5W / 9.6W / 10W / 11.52W / 14.4W (Meter)
色溫 Color temperature	3000K / 4000K / 2700K-6000K
光效 Light efficiency	65lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	AI ☐ WH ☐
Available	
ON/OFF	☐ Dimmable ☐ Tunable white
TRIAC	
0-10V	
DALI	
PLC	




GL-CH3030C LED線型燈



功率 Watts	14.4W / 19.2W / 20.16W / 22W (Meter)
色溫 Color temperature	3000K / 4000K / 2700K-6000K / RGB(W)
光效 Light efficiency	70lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	AI ☐ WH ☐
Available	
ON/OFF	☐ Dimmable ☐ Tunable white ☐ RGBW
TRIAC	
0-10V	
DALI	
PLC	




GL-H03030K LED線型燈



功率 Watts	14.4W / 19.2W / 20.16W / 22W / 33.3W (Meter)
色溫 Color temperature	3000K / 4000K / 2700K-6000K / RGB(W)
光效 Light efficiency	65lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	AI ☐ WH ☐
Available	
ON/OFF	☐ Dimmable ☐ Tunable white ☐ RGBW
TRIAC	
0-10V	
DALI	
PLC	



GL-BW3535 LED線型燈




功率 Watts	14.4W / 19.2W / 20.16W / 22W / 33.3W (Meter)
色溫 Color temperature	3000K / 4000K / 2700K-6000K / RGB(W)
光效 Light efficiency	70lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	AI ☐ WH ☐
Available	
ON/OFF	☐ Dimmable ☐ Tunable white ☐ RGBW
TRIAC	
0-10V	
DALI	
PLC	



Physical profile samples are available upon request for precise slotting.
可先索取實體型材樣品，以便精準開槽。


GL-BW4043 LED線型燈



功率 Watts	14.4W / 19.2W / 20.16W / 22W / 33.3W (Meter)
色溫 Color temperature	3000K / 4000K / 2700K-6000K / RGB(W)
光效 Light efficiency	70lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	AI ☐ WH ☐
Available	
ON/OFF	☐ Dimmable ☐ Tunable white ☐ RGBW
TRIAC	
0-10V	
DALI	
PLC	




GL-BW5035 LED線型燈



功率 Watts	14.4W / 19.2W / 20.16W / 22W / 33.3W (Meter)
色溫 Color temperature	3000K / 4000K / 2700K-6000K / RGB(W)
光效 Light efficiency	70lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	AI ☐ WH ☐
Available	
ON/OFF	☐ Dimmable ☐ Tunable white ☐ RGBW
TRIAC	
0-10V	
DALI	
PLC	



GL-BW5050 LED線型燈




功率 Watts	14.4W / 19.2W / 20.16W / 22W / 33.3W (Meter)
色溫 Color temperature	3000K / 4000K / 2700K-6000K / RGB(W)
光效 Light efficiency	70lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	AI ☐ WH ☐
Available	
ON/OFF	☐ Dimmable ☐ Tunable white ☐ RGBW
TRIAC	
0-10V	
DALI	
PLC	



Physical profile samples are available upon request for precise slotting.
可先索取實體型材樣品，以便精準開槽。

GL-BW-T30

LED線型燈




功率 Watts	14.4W / 19.2W / 20.16W / 22W (Meter)
色溫 Color temperature	3000K / 4000K / 2700K-6000K / RGB(W)
光效 Light efficiency	65lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	AI ☐ WH ☐
Available	
ON/OFF	☐ Dimmable ☐ Tunable white ☐ RGBW
TRIAC	☐
0-10V	☐
DALI	☐
PLC	☐



GL-BW-T60

LED線型燈




功率 Watts	14.4W / 19.2W / 20.16W / 22W / 33.3W (Meter)
色溫 Color temperature	3000K / 4000K / 2700K-6000K / RGB(W)
光效 Light efficiency	70lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	AI ☐ WH ☐
Available	
ON/OFF	☐ Dimmable ☐ Tunable white ☐ RGBW
TRIAC	☐
0-10V	☐
DALI	☐
PLC	☐



GL-BW-T120

LED線型燈




功率 Watts	14.4W / 19.2W / 20.16W / 22W / 33.3W (Meter)
色溫 Color temperature	3000K / 4000K / 2700K-6000K / RGB(W)
光效 Light efficiency	70lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	AI ☐ WH ☐
Available	
ON/OFF	☐ Dimmable ☐ Tunable white ☐ RGBW
TRIAC	☐
0-10V	☐
DALI	☐
PLC	☐





GL-SW2109

LED線型燈



功率 Watts	5W / 9.6W / 10W (Meter)
色溫 Color temperature	3000K / 4000K / 2700K-6000K
光效 Light efficiency	70lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	AI ☐ WH ☐
Available	
ON/OFF	☐ Dimmable ☐ Tunable white
TRIAC	☐
0-10V	☐
DALI	☐
PLC	☐



1. 膨脹螺栓嵌入安裝面。

2. 通過螺絲固定夾子。

3. 線型燈安裝在夾子上。

4. 連接LED線型燈電源。
- 1.The expansion bolt is embedded into the mounting surface.


2.Fixing clip through screw.

3.The linear Light is installed on the clip.



4.Connect LED Linear Light power supply.

GL-SW2409

LED線型燈



功率 Watts	5W / 9.6W / 10W (Meter)
色溫 Color temperature	3000K / 4000K / 2700K-6000K
光效 Light efficiency	70lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	AI ☐ WH ☐
Available	
ON/OFF	☐ Dimmable ☐ Tunable white
TRIAC	☐
0-10V	☐
DALI	☐
PLC	☐



- Step 1

21mm


8mm DRYWALL
- Step 2
- Step 3



REFLECTION LINEAR SERIES


The anti-glare polarized light series focusing on the effect of seeing the light in the room but can't seeing the presence of the lamp. When we light up the traditional lights,not only the luminous surface is obvious, but also makes people feel dazzling and dizzy. However, the anti-glare polarized series has a special structure to make the light soft and not dazzling. The polarized light washes the wall and distributes the light evenly, showing the beauty of visual light effect.

防眩偏光系列專注於室內見光不見燈的效果。傳統的燈光在點亮的時候，不僅發光面明顯，還會讓人感到刺眼和產生眩暈感眼，但是防眩偏光系列擁有特殊結構，使燈光柔和不刺偏光洗牆、佈光均勻，呈現出視覺的光效美。

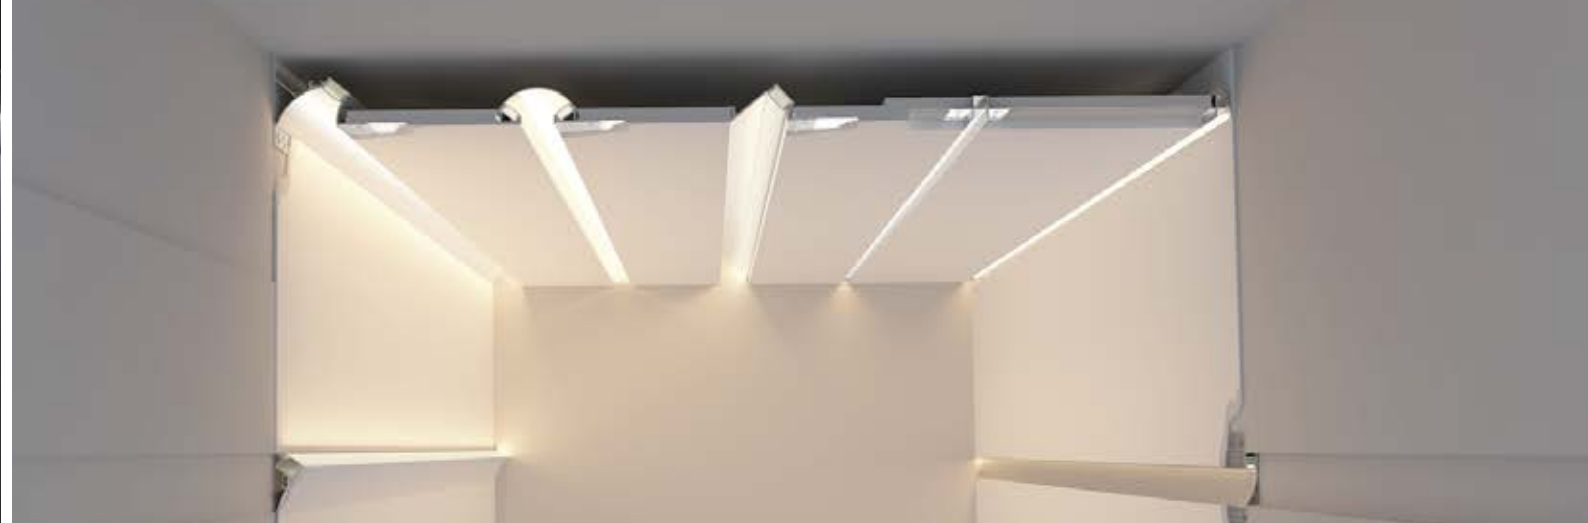

GL-QSG4118

LED線型燈

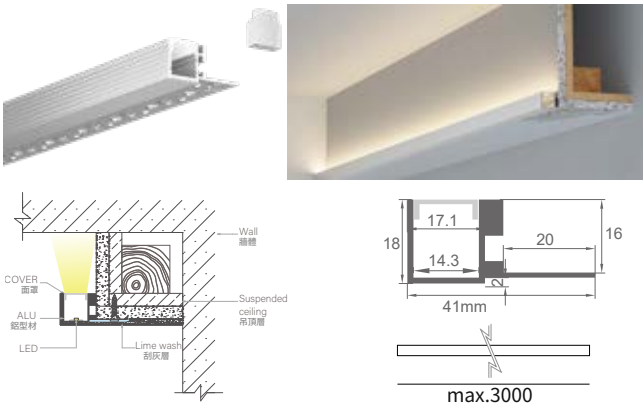


功率 Watts	14.4W / 19.2W / 20.16W / 22W (Meter)
色溫 Color temperature	3000K / 4000K / 2700K-6000K / RGB(W)
光效 Light efficiency	65lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	AI ☐ WH ☐
Available	☐ Dimmable ☐ Tunable white ☐ RGBW
ON/OFF	
TRIAC	
0-10V	
DALI	
PLC	

CE CB

GL-QSG4118B

LED線型燈

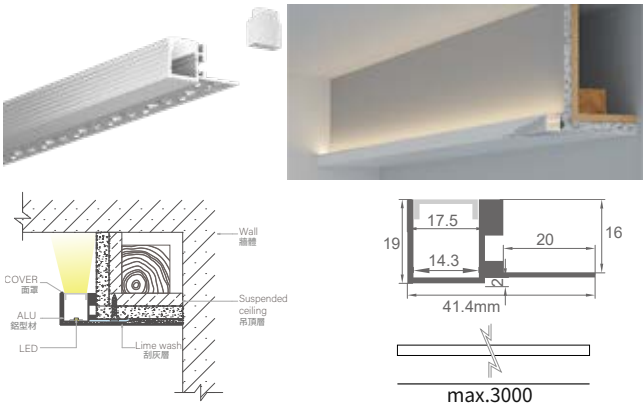


功率 Watts	14.4W / 19.2W / 20.16W / 22W (Meter)
色溫 Color temperature	3000K / 4000K / 2700K-6000K / RGB(W)
光效 Light efficiency	65lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	AI ☐ WH ☐
Available	☐ Dimmable ☐ Tunable white ☐ RGBW
ON/OFF	
TRIAC	
0-10V	
DALI	
PLC	

CE CB

GL-QSG3825

LED線型燈

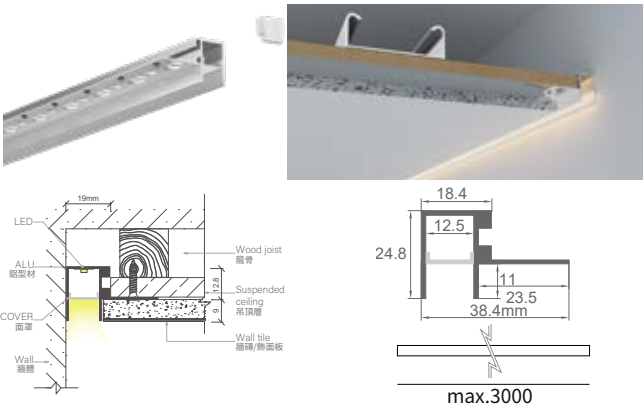


功率 Watts	14.4W / 19.2W / 20.16W / 22W (Meter)
色溫 Color temperature	3000K / 4000K / 2700K-6000K / RGB(W)
光效 Light efficiency	65lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	AI ☐ WH ☐
Available	☐ Dimmable ☐ Tunable white ☐ RGBW
ON/OFF	
TRIAC	
0-10V	
DALI	
PLC	

CE CB

GL-QSG3820

LED線型燈

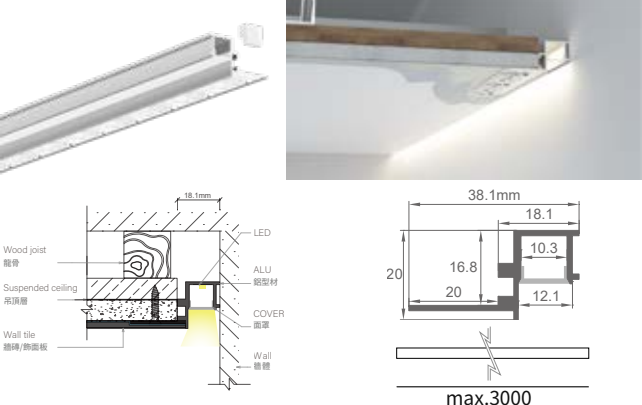


功率 Watts	9.6W / 11.52W / 14.4W (Meter)
色溫 Color temperature	3000K / 4000K / 2700K-6000K
光效 Light efficiency	65lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	AI ☐ WH ☐
Available	☐ Dimmable ☐ Tunable white ☐ RGBW
ON/OFF	
TRIAC	
0-10V	
DALI	
PLC	

CE CB

GL-QSG4320

LED線型燈

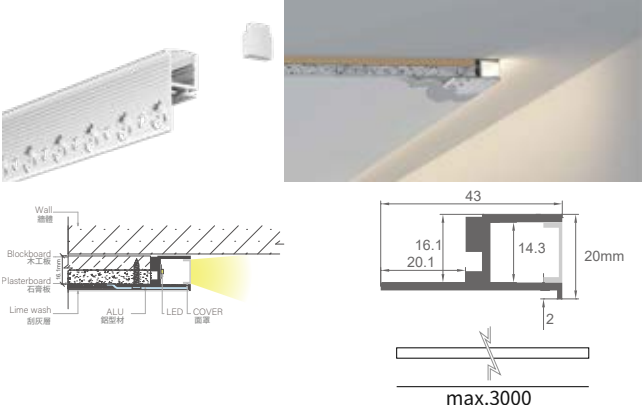


功率 Watts	14.4W / 19.2W / 20.16W / 22W (Meter)
色溫 Color temperature	3000K / 4000K / 2700K-6000K / RGB(W)
光效 Light efficiency	65lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	AI ☐ WH ☐
Available	☐ Dimmable ☐ Tunable white ☐ RGBW
ON/OFF	
TRIAC	
0-10V	
DALI	
PLC	

CE CB

GL-QSG8556


LED線型燈

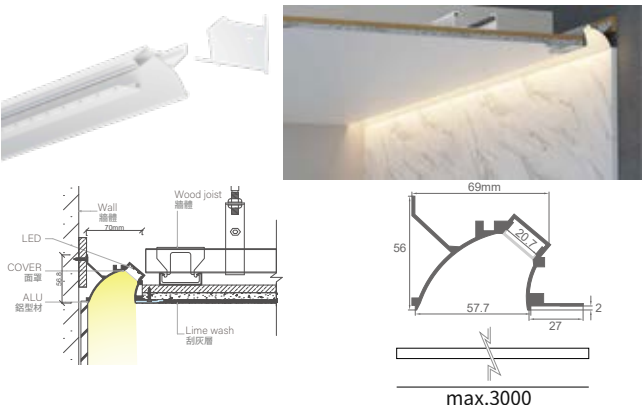

功率 Watts	14.4W / 19.2W / 20.16W / 22W / 33.3W (Meter)
色溫 Color temperature	3000K / 4000K / 2700K-6000K / RGB(W)
光效 Light efficiency	65lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	AI ☐ WH ☐
Available	☐ Dimmable ☐ Tunable white ☐ RGBW
ON/OFF	
TRIAC	
0-10V	
DALI	
PLC	


CE CB

GL-QSG8556B LED線型燈

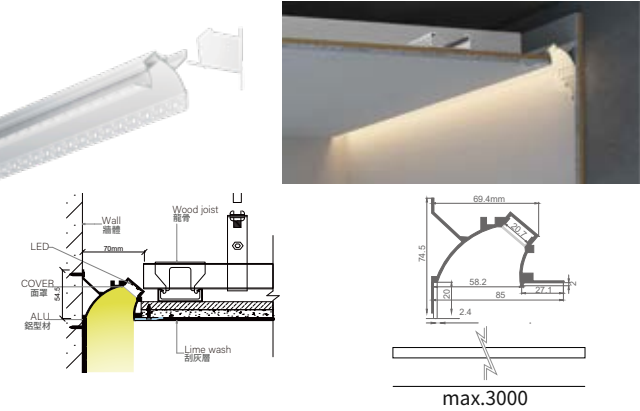


功率 Watts	14.4W / 19.2W / 20.16W / 22W / 33.3W (Meter)
色溫 Color temperature	3000K / 4000K / 2700K-6000K / RGB(W)
光效 Light efficiency	65lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	AI□ WH□
Available	Dimmable Tunable white RGBW CE CB   
ON/OFF	
TRIAC	
0-10V	
DALI	
PLC	

GL-QSG10037 LED線型燈

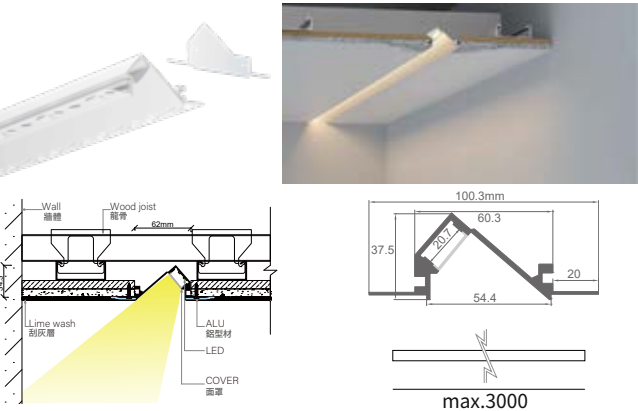


功率 Watts	14.4W / 19.2W / 20.16W / 22W (Meter)
色溫 Color temperature	3000K / 4000K / 2700K-6000K / RGB(W)
光效 Light efficiency	65lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	AI□ WH□
Available	Dimmable Tunable white RGBW CE CB   
ON/OFF	
TRIAC	
0-10V	
DALI	
PLC	

GL-QSG2655 LED線型燈

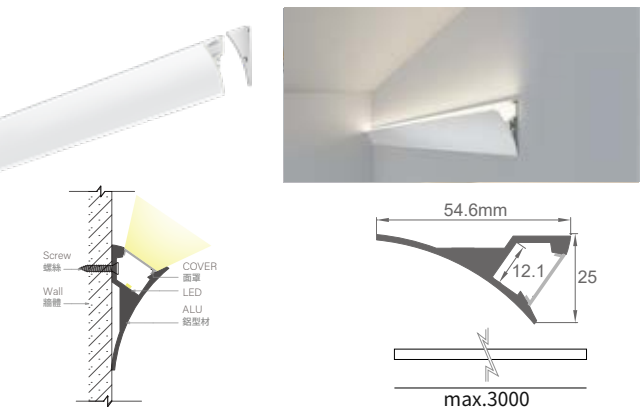


功率 Watts	14.4W / 19.2W / 20.16W / 22W (Meter)
色溫 Color temperature	3000K / 4000K / 2700K-6000K / RGB(W)
光效 Light efficiency	65lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	AI□ WH□
Available	Dimmable Tunable white RGBW CE CB   
ON/OFF	
TRIAC	
0-10V	
DALI	
PLC	

GL-QSG11637 LED線型燈

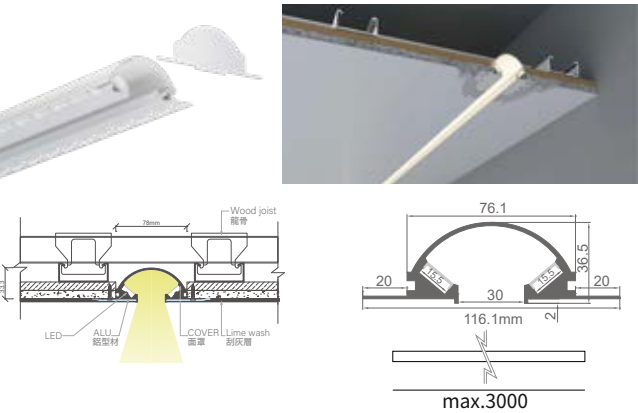


功率 Watts	14.4W*2 / 19.2W*2 / 20.16W*2 / 22W*2 (Meter)
色溫 Color temperature	3000K / 4000K / 2700K-6000 / RGB(W)K
光效 Light efficiency	65lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	AI□ WH□
Available	Dimmable Tunable white RGBW CE CB   
ON/OFF	
TRIAC	
0-10V	
DALI	
PLC	

GL-QSG2696 LED線型燈

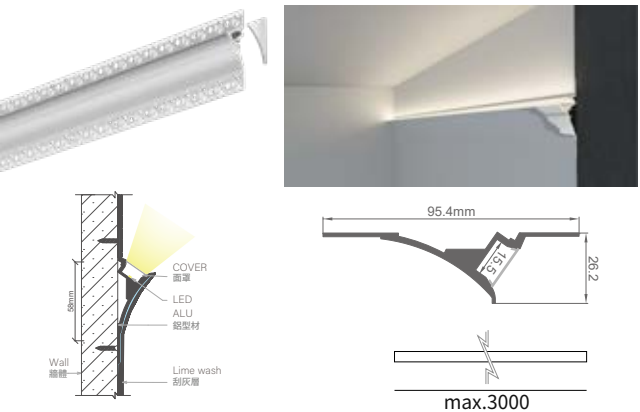

功率 Watts	14.4W / 19.2W / 20.16W / 22W (Meter)
色溫 Color temperature	3000K / 4000K / 2700K-6000K / RGB(W)
光效 Light efficiency	65lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	AI□ WH□
Available	Dimmable Tunable white RGBW CE CB   
ON/OFF	
TRIAC	
0-10V	
DALI	
PLC	


GL-QSG3596 LED線型燈

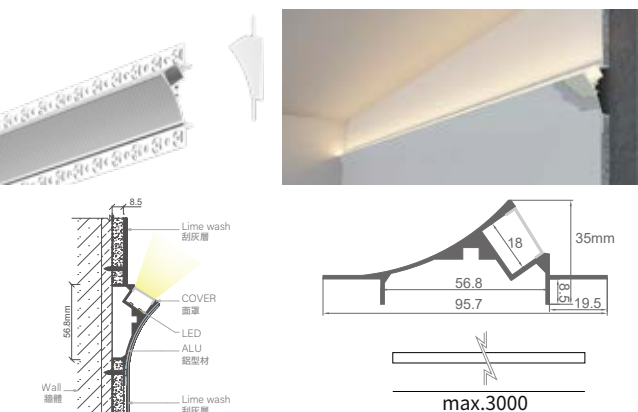

功率 Watts	14.4W / 19.2W / 20.16W / 22W (Meter)
色溫 Color temperature	3000K / 4000K / 2700K-6000K / RGB(W)
光效 Light efficiency	65lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	AI□ WH□
Available	Dimmable Tunable white RGBW CE CB   
ON/OFF	
TRIAC	
0-10V	
DALI	
PLC	

GL-QSG3212B


LED線型燈

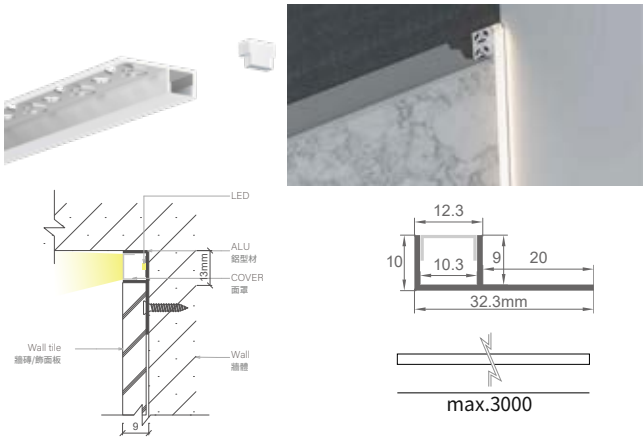

功率 Watts	5W / 9.6W / 10W / 11.52W / 14.4W (Meter)
色溫 Color temperature	3000K / 4000K / 2700K-6000K
光效 Light efficiency	65lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	AI ☐ WH ☐
Available	
ON/OFF	☐ Dimmable ☐ Tunable white
TRIAC	
0-10V	
DALI	
PLC	

GL-QSG9214


LED線型燈

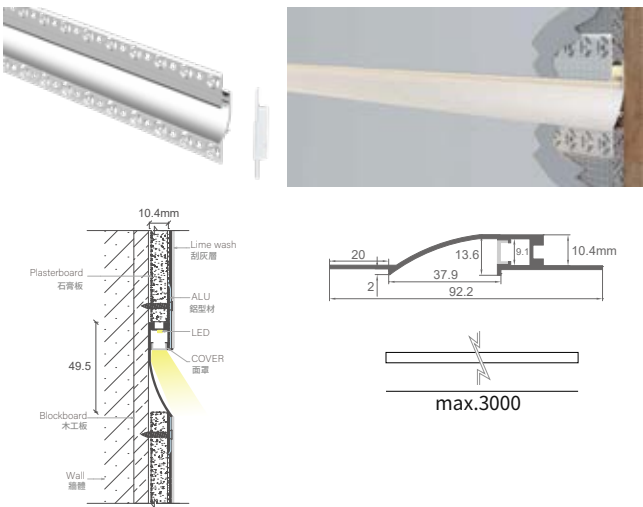

功率 Watts	5W / 9.6W / 10W / 11.52W / 14.4W (Meter)
色溫 Color temperature	3000K / 4000K / 2700K-6000K
光效 Light efficiency	65lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DV12V
顏色 Color	AI ☐ WH ☐
Available	
ON/OFF	☐ Dimmable ☐ Tunable white
TRIAC	
0-10V	
DALI	
PLC	

GL-QSG12055-2525C


LED線型燈

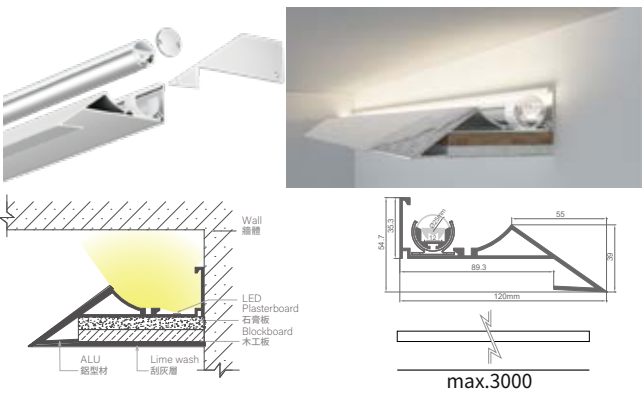

功率 Watts	14.4W / 19.2W / 20.16W / 22W (Meter)
色溫 Color temperature	3000K / 4000K / 2700K-6000K / RGB(W)
光效 Light efficiency	65lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	AI ☐ WH ☐
Available	
ON/OFF	☐ Dimmable ☐ Tunable white ☐ RGBW
TRIAC	
0-10V	
DALI	
PLC	

GL-QSG7058

LED線型燈

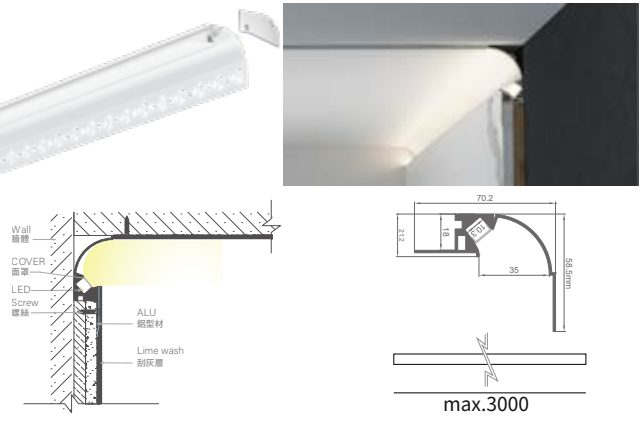

功率 Watts	5W / 9.6W / 10W / 11.52W / 14.4W (Meter)
色溫 Color temperature	3000K / 4000K / 2700K-6000K
光效 Light efficiency	65lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	AI ☐ WH ☐
Available	
ON/OFF	☐ Dimmable ☐ Tunable white
TRIAC	
0-10V	
DALI	
PLC	





FLEXABLE LINEAR

Silicone neon strips adopt the silicone extrusion molding process.The protection level can reach to IP65, with resistance to salt water. Suitable for indoor and outdoor modelling decoration, building outline, city night lighting, etc.

硅膠霓虹燈條採用硅膠擠出成型工藝，防護等級可達IP65，耐鹽水，適用於室內外造型裝飾、建築輪廓、城市夜景照明等。

GL-SW-NFT1212

LED正發光無影燈一體擠出型



功率 Watts	12W (Meter)
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	50lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V




顏色 Color WH

Available
ON/OFF
TRIAC
0-10V
DALI
PLC



GL-SW-NFS1212

LED側發光無影燈一體擠出型



功率 Watts	12W (Meter)
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	50lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V



顏色 Color WH

Available
ON/OFF
TRIAC
0-10V
DALI
PLC



GL-SW-NFT1616

LED正發光無影燈一體擠出型



功率 Watts	15W (Meter)
色溫 Color temperature	3000K / 4000K / 2700K-5000K
光效 Light efficiency	50lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V



顏色 Color WH

Available
ON/OFF
TRIAC
0-10V
DALI
PLC



GL-SW-NFS1616

LED側發光無影燈一體擠出型



功率 Watts	15W (Meter)
色溫 Color temperature	3000K / 4000K / 2700K-5000K
光效 Light efficiency	50lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V

顏色 Color WH


Available
ON/OFF
TRIAC
0-10V
DALI
PLC



Physical profile samples are available upon request for precise slotting.
可先索取實體型材樣品，以便精準開槽。



GL-XW1306 LED嵌入式射燈 -W:白色 -B:黑色

功率 Watts	7W / 9W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	80lm/W
角度 Beam angle	15° / 24° / 38°
顯指 Color rendering index	≥90
電壓 Voltage	AC110V-220V
顏色 Color	White / Black

Available

ON/OFF

TRIAC

0-10V

DALI

PLC

Dimmable

CE


CB

25°

IP 20

UGR<19

GL-XW1395T LED嵌入式射燈 -W:白色 -B:黑色

功率 Watts	9W / 12W / 15W / 18W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	80lm/W
角度 Beam angle	15° / 24° / 36°
顯指 Color rendering index	≥90
電壓 Voltage	AC110V-220V
顏色 Color	White / Black

Available

ON/OFF

TRIAC

0-10V

DALI

PLC

Dimmable

CE

CB

25°

IP 20

UGR<19

Accessories(option)/Decorative reflector(selection) 配件(選配)/裝飾反光杯(選擇)

honeycomb baffle 防眩蜂巢網

bright black 亮黑


bright silver 亮銀

ivory white 象牙白

space black 太空黑

rose gold 玫瑰金

GL-XJE21055A LED有邊框嵌入式可調節射燈 -W:白色 -B:黑色

功率 Watts	7W / 9W
色溫 Color temperature	3000K / 4000K / 2700K-6000K
光效 Light efficiency	55lm/W
角度 Beam angle	15° / 24° / 38°
顯指 Color rendering index	≥95
電壓 Voltage	AC110V-220V
顏色 Color	White / Black

Available

ON/OFF

TRIAC

0-10V

DALI

PLC

Dimmable

Tunable white

CE

CB

25°

IP 20

UGR<10


Decorative reflector(selection) 裝飾反光杯(選擇)

bright black 珍珠黑

white 雪白

black 炭黑

GL-XJE21075A LED有邊框嵌入式可調節射燈 -W:白色 -B:黑色

功率 Watts	9W / 12W
色溫 Color temperature	3000K / 4000K / 2700K-6000K
光效 Light efficiency	55lm/W
角度 Beam angle	15° / 24° / 38°
顯指 Color rendering index	≥95
電壓 Voltage	AC110V-220V
顏色 Color	White / Black

Available

ON/OFF

TRIAC

0-10V

DALI

PLC

Dimmable

Tunable white

CE

CB

25°

IP 20

UGR<10


Decorative reflector(selection) 裝飾反光杯(選擇)

bright black 珍珠黑

white 雪白

black 炭黑

GL-XJE12095A LED窄邊嵌入式可調射燈 -W:白色 -B:黑色

功率 Watts	15W / 20W
色溫 Color temperature	3000K / 4000K / 2700K-6000K
光效 Light efficiency	65lm/W
角度 Beam angle	15° / 24° / 38°
顯指 Color rendering index	≥97
電壓 Voltage	AC110V-220V
顏色 Color	White / Black

Available

ON/OFF

TRIAC

0-10V

DALI

PLC

Dimmable

Tunable white

CE

CB

25°

IP 20

UGR<10

Decorative reflector(selection) 裝飾反光杯(選擇)

bright black 珍珠黑


white 雪白

black 炭黑

Physical profile samples are available upon request for precise slotting.
可先索取實體型材樣品，以便精準開槽。




GL-TZ-L55Y-1 LED有邊框嵌入式拉伸燈 -W:白色 -B:黑色



功率 Watts	5W / 7W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	75lm/W
角度 Beam angle	15° / 24° / 36°
顯指 Color rendering index	≥80
電壓 Voltage	AC110V-220V
顏色 Color	White / Black
Available	☐ Dimmable
ON/OFF	☐
TRIAC	☐
0-10V	☐
DALI	☐
PLC	☐




GL-TZ-L75Y-1 LED有邊框嵌入式拉伸燈 -W:白色 -B:黑色



功率 Watts	15W / 20W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	75lm/W
角度 Beam angle	15° / 24° / 36°
顯指 Color rendering index	≥80
電壓 Voltage	AC110V-220V
顏色 Color	White / Black
Available	☐ Dimmable
ON/OFF	☐
TRIAC	☐
0-10V	☐
DALI	☐
PLC	☐




GL-TZ-L95Y-1 LED有邊框嵌入式拉伸燈 -W:白色 -B:黑色



功率 Watts	25W / 30W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	75lm/W
角度 Beam angle	15° / 24° / 36°
顯指 Color rendering index	≥80
電壓 Voltage	AC110V-220V
顏色 Color	White / Black
Available	☐ Dimmable
ON/OFF	☐
TRIAC	☐
0-10V	☐
DALI	☐
PLC	☐




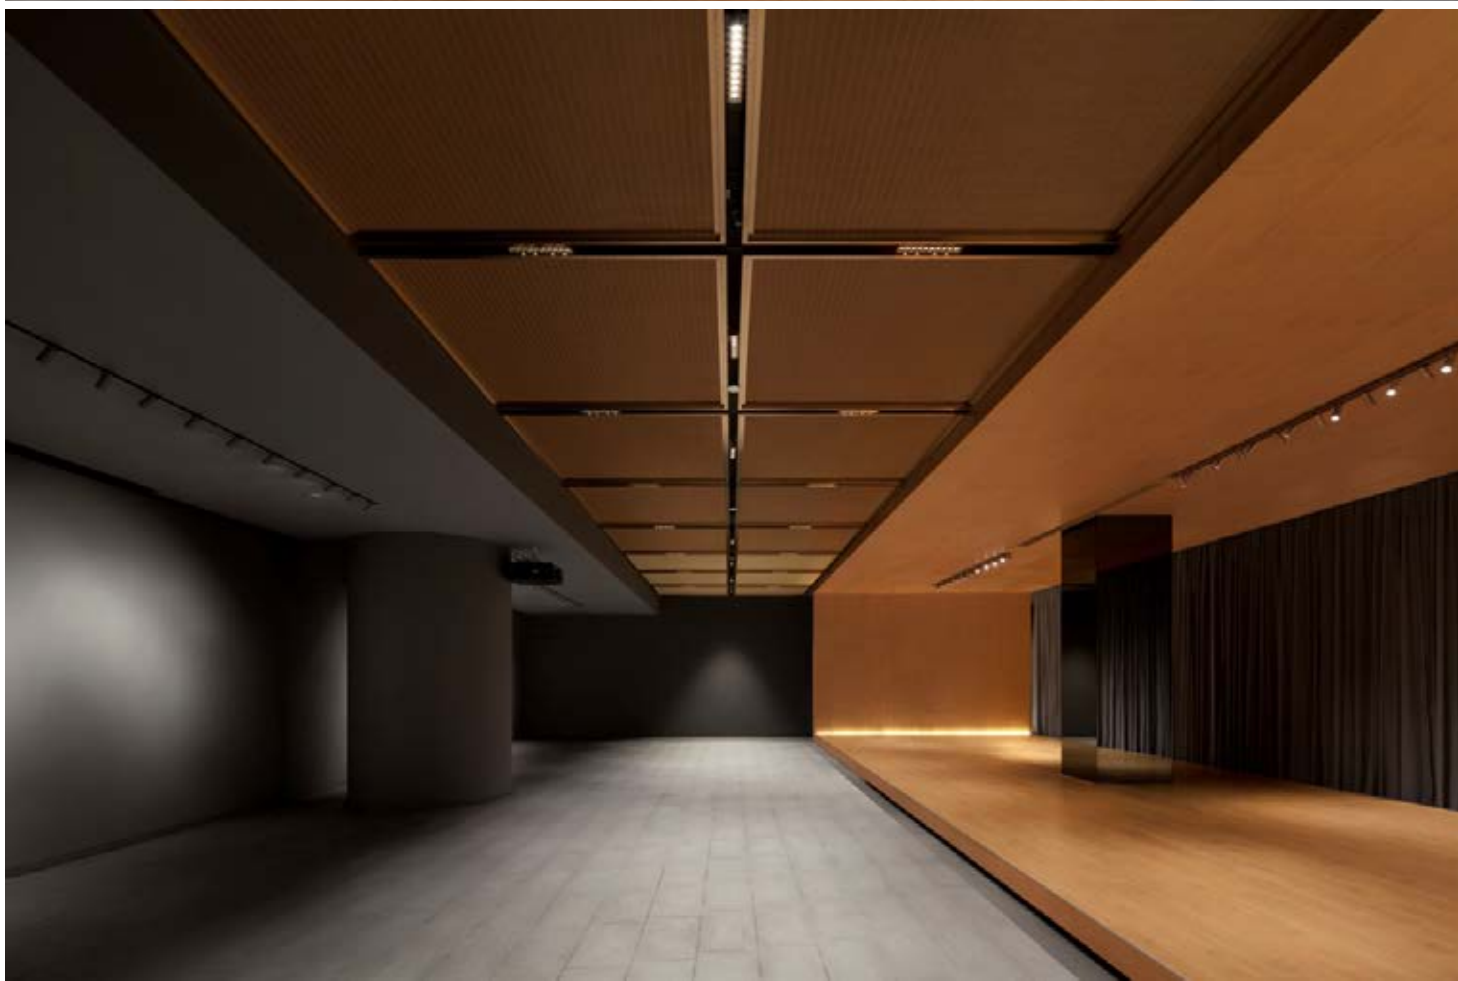

GL-JRST01

LED固定式無邊下照單頭射燈

-W:白色 -B:黑色

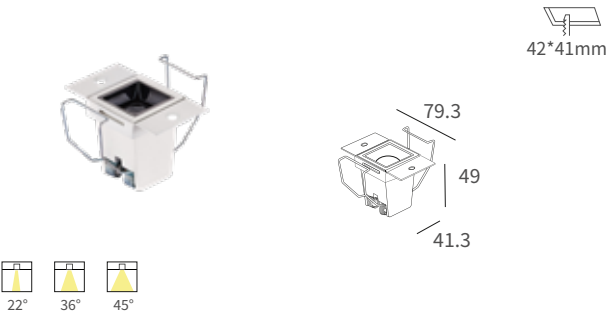


功率 Watts	2W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	70lm/W
角度 Beam angle	22° / 36° / 45°
顯指 Color rendering index	≥90
電壓 Voltage	AC110-220V
顏色 Color	White / Black
Available	
ON/OFF	☐ Dimmable
TRIAC	☐ IP20
0-10V	☐ IP65
DALI	☐
PLC	☐

GL-JRST02

LED固定式無邊下照雙頭射燈

-W:白色 -B:黑色

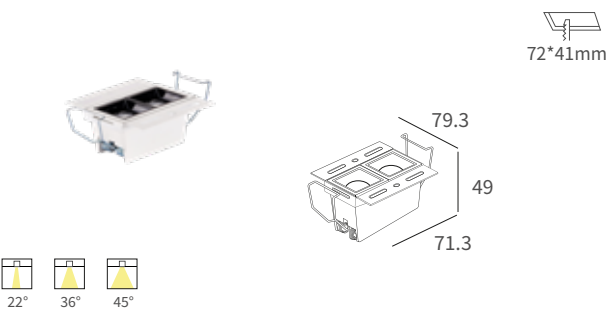


功率 Watts	4W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	70lm/W
角度 Beam angle	22° / 36° / 45°
顯指 Color rendering index	≥90
電壓 Voltage	AC110-220V
顏色 Color	White / Black
Available	
ON/OFF	☐ Dimmable
TRIAC	☐ IP20
0-10V	☐ IP65
DALI	☐
PLC	☐

GL-JRST05

LED固定式無邊下照五頭射燈

-W:白色 -B:黑色

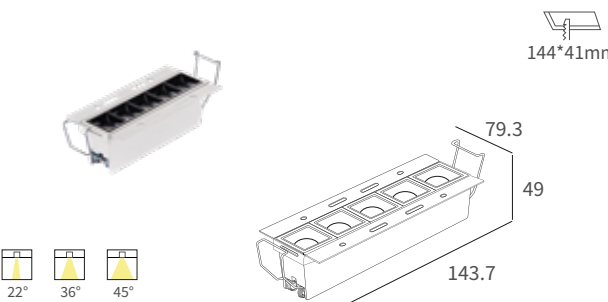


功率 Watts	10W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	70lm/W
角度 Beam angle	22° / 36° / 45°
顯指 Color rendering index	≥90
電壓 Voltage	AC110-220V
顏色 Color	White / Black
Available	
ON/OFF	☐ Dimmable
TRIAC	☐ IP20
0-10V	☐
DALI	☐
PLC	☐

GL-JRST10

LED固定式無邊下照十頭射燈

-W:白色 -B:黑色

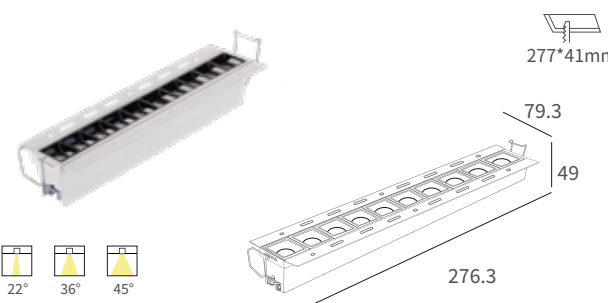


功率 Watts	20W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	70lm/W
角度 Beam angle	22° / 36° / 45°
顯指 Color rendering index	≥90
電壓 Voltage	AC110-220V
顏色 Color	White / Black
Available	
ON/OFF	☐ Dimmable
TRIAC	☐ IP20
0-10V	☐
DALI	☐
PLC	☐

GL-JRS01

LED固定式有邊下照單頭射燈

-W:白色 -B:黑色

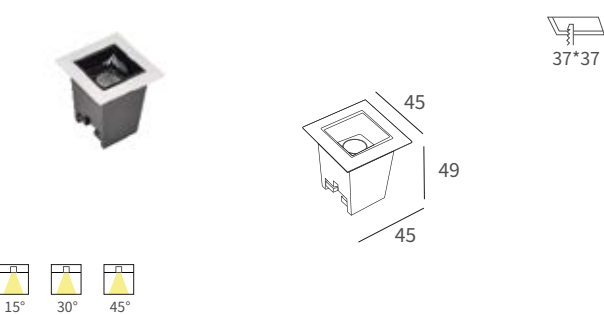


功率 Watts	2W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	70lm/W
角度 Beam angle	15° / 30° / 45°
顯指 Color rendering index	≥90
電壓 Voltage	AC110-220V
顏色 Color	White / Black
Available	
ON/OFF	☐ Dimmable
TRIAC	☐
0-10V	☐
DALI	☐
PLC	☐

GL-JRS02

LED固定式有邊下照雙頭射燈

-W:白色 -B:黑色

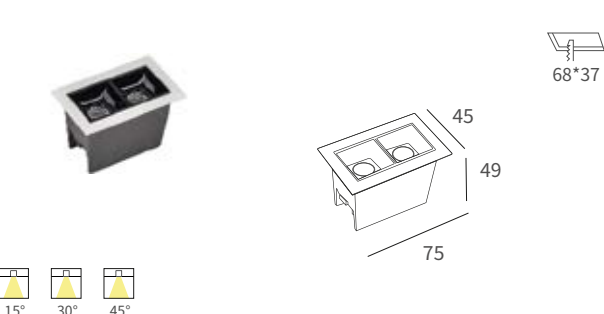


功率 Watts	4W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	70lm/W
角度 Beam angle	15° / 30° / 45°
顯指 Color rendering index	≥90
電壓 Voltage	AC110-220V
顏色 Color	White / Black
Available	
ON/OFF	☐ Dimmable
TRIAC	☐
0-10V	☐
DALI	☐
PLC	☐

GL-JRS05

LED固定式有邊下照五頭射燈

-W:白色 -B:黑色

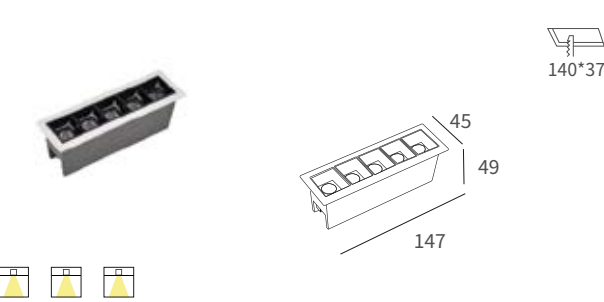


功率 Watts	10W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	70lm/W
角度 Beam angle	15° / 30° / 45°
顯指 Color rendering index	≥90
電壓 Voltage	AC110-220V
顏色 Color	White / Black
Available	
ON/OFF	☐ Dimmable
TRIAC	☐
0-10V	☐
DALI	☐
PLC	☐

GL-JRS10

LED固定式有邊下照十頭射燈


-W:白色 -B:黑色

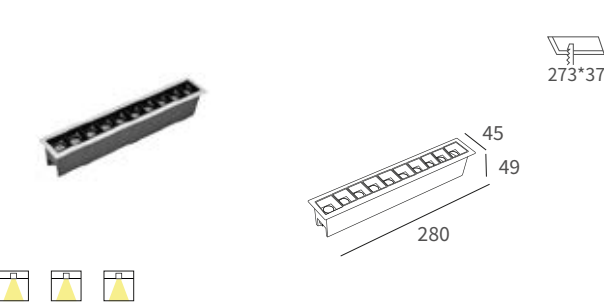

功率 Watts	20W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	70lm/W
角度 Beam angle	15° / 30° / 45°
顯指 Color rendering index	≥90
電壓 Voltage	AC110-220V
顏色 Color	White / Black
Available	
ON/OFF	☐ Dimmable
TRIAC	☐
0-10V	☐
DALI	☐
PLC	☐

GL-SKC033103

LED薄款嵌入式射燈



功率 Watts	3W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	51lm/W
角度 Beam angle	24°
顯指 Color rendering index	≥90
電壓 Voltage	AC110V / AC220V
顏色 Color	White


Available
ON/OFF
TRIAC
0-10V
DALI
PLC



GL-XW-DZSD37

LED薄款嵌入式射燈

-W:白色 -B:黑色



功率 Watts	7W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	85lm/W
角度 Beam angle	15° / 24° / 36°
顯指 Color rendering index	≥90
電壓 Voltage	AC110V / AC220V
顏色 Color	White / Black


Available
ON/OFF
TRIAC
0-10V
DALI
PLC



GL-XW-DZSD37N

LED薄款嵌入式射燈

-W:白色 -B:黑色



功率 Watts	12W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	85lm/W
角度 Beam angle	15° / 24° / 36°
顯指 Color rendering index	≥90
電壓 Voltage	AC110V / AC220V
顏色 Color	White / Black

Available
ON/OFF
TRIAC
0-10V
DALI
PLC




THIN SERIES

POT SERIES



GL-XW2325 LED 嵌入式筒燈



120°

功率 Watts	5W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	70lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	AC110V-220V
顏色 Color	White


Available
ON/OFF
TRIAC
0-10V
DALI
PLC



Dimmable



GL-XW2330 LED 嵌入式筒燈



120°

功率 Watts	7W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	70lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	AC110V-220V
顏色 Color	White


Available
ON/OFF
TRIAC
0-10V
DALI
PLC



Dimmable



GL-XW2340 LED 嵌入式筒燈



120°

功率 Watts	12W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	70lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	AC110V-220V
顏色 Color	White


Available
ON/OFF
TRIAC
0-10V
DALI
PLC



Dimmable



GL-XW2360 LED 嵌入式筒燈



120°

功率 Watts	12W / 15W / 18W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	70lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	AC110V-220V
顏色 Color	White

Available
ON/OFF
TRIAC
0-10V
DALI
PLC



Dimmable






FIND SERIES

GL-XW4101

LED 有邊單頭嵌入式射燈

-W:白色 -B:黑色



功率 Watts	7W / 9W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	72lm/W
角度 Beam angle	24° / 38°
顯指 Color rendering index	≥90
電壓 Voltage	AC110V~220V
顏色 Color	White / Black

Available
ON/OFF
TRIAC
0-10V
DALI
PLC




Decorative reflector(selection) 裝飾反光杯(選擇)



GL-XW4102

LED 有邊雙頭嵌入式射燈

-W:白色 -B:黑色



功率 Watts	2*7W / 2*9W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	72lm/W
角度 Beam angle	24° / 38°
顯指 Color rendering index	≥90
電壓 Voltage	AC110V~220V
顏色 Color	White / Black

Available
ON/OFF
TRIAC
0-10V
DALI
PLC





Decorative reflector(selection) 裝飾反光杯(選擇)



GL-WB4401

LED 無邊單頭嵌入式射燈

-W:白色 -B:黑色



功率 Watts	10W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	72lm/W
角度 Beam angle	24° / 38° / 60°
顯指 Color rendering index	≥90
電壓 Voltage	AC110V~220V
顏色 Color	White / Black



Available
ON/OFF
TRIAC
0-10V
DALI
PLC



GL-WB4402

LED 無邊雙頭嵌入式射燈

-W:白色 -B:黑色

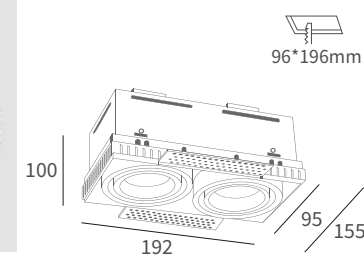

功率 Watts	2*10W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	70lm/W
角度 Beam angle	24° / 38° / 60°
顯指 Color rendering index	≥90
電壓 Voltage	AC110V~220V
顏色 Color	White / Black

Available
ON/OFF
TRIAC
0-10V
DALI
PLC





SIMPLE SERIES



GL-XW2820

LED方形明裝射燈

-W:白色 -B:黑色



功率 Watts	9W
色溫 Color temperature	3000K / 4000K / 6000K
光效 Light efficiency	80lm/W
角度 Beam angle	20° / 40° / 60°
顯指 Color rendering index	≥90
電壓 Voltage	AC110V-220V
顏色 Color	White / Black

Available
ON/OFF





TRIAC (外置驅動)
0-10V (外置驅動)
DALI (外置驅動)
PLC (外置驅動)



GL-XW2825

LED方形明裝射燈

-W:白色 -B:黑色



功率 Watts	12W / 15W
色溫 Color temperature	3000K / 4000K / 6000K
光效 Light efficiency	80lm/W
角度 Beam angle	20° / 40° / 60°
顯指 Color rendering index	≥90
電壓 Voltage	AC110V-220V
顏色 Color	White / Black

Available
ON/OFF





TRIAC (外置驅動)
0-10V (外置驅動)
DALI (外置驅動)
PLC (外置驅動)



GL-XW2830

LED方形明裝射燈

-W:白色 -B:黑色



功率 Watts	25W
色溫 Color temperature	3000K / 4000K / 6000K
光效 Light efficiency	80lm/W
角度 Beam angle	20° / 40° / 60°
顯指 Color rendering index	≥90
電壓 Voltage	AC110V-220V
顏色 Color	White / Black

Available
ON/OFF





TRIAC (外置驅動)
0-10V (外置驅動)
DALI (外置驅動)
PLC (外置驅動)



GL-XW2420

LED圓形明裝射燈

-W:白色 -B:黑色



功率 Watts	7W
色溫 Color temperature	3000K / 4000K / 6000K
光效 Light efficiency	80lm/W
角度 Beam angle	20° / 40° / 60°
顯指 Color rendering index	≥90
電壓 Voltage	AC110V-220V
顏色 Color	White / Black

Available

ON/OFF



Dimmable

TRIAC

0-10V

DALI


PLC



GL-XW2425

LED圓形明裝射燈

-W:白色 -B:黑色



功率 Watts	12W
色溫 Color temperature	3000K / 4000K / 6000K
光效 Light efficiency	80lm/W
角度 Beam angle	20° / 40° / 60°
顯指 Color rendering index	≥90
電壓 Voltage	AC110V-220V
顏色 Color	White / Black

Available

ON/OFF



Dimmable

TRIAC

0-10V

DALI


PLC



GL-XW2430

LED圓形明裝射燈

-W:白色 -B:黑色



功率 Watts	18W
色溫 Color temperature	3000K / 4000K / 6000K
光效 Light efficiency	80lm/W
角度 Beam angle	20° / 40° / 60°
顯指 Color rendering index	≥90
電壓 Voltage	AC110V-220V
顏色 Color	White / Black

Available

ON/OFF



Dimmable

TRIAC

0-10V

DALI



PLC



GL-XW2440

LED圓形明裝射燈

-W:白色 -B:黑色



功率 Watts	25W
色溫 Color temperature	3000K / 4000K / 6000K
光效 Light efficiency	80lm/W
角度 Beam angle	20° / 40° / 60°
顯指 Color rendering index	≥90
電壓 Voltage	AC110V-220V
顏色 Color	White / Black

Available

ON/OFF



Dimmable

TRIAC

0-10V

DALI


PLC



GL-XW2355T-D

LED明裝筒燈

-W:白色 -B:黑色



功率 Watts	7W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	93lm/W
角度 Beam angle	15° / 24° / 38°
顯指 Color rendering index	≥80
電壓 Voltage	AC110V-220V
顏色 Color	White / Black

Available

ON/OFF



Dimmable

TRIAC

0-10V

DALI

PLC




Decorative reflector(selection) 裝飾反光杯(選擇)



GL-XW2375T-D

LED明裝筒燈

-W:白色 -B:黑色



功率 Watts	9W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	90lm/W
角度 Beam angle	15° / 24° / 38°
顯指 Color rendering index	≥80
電壓 Voltage	AC110V-220V
顏色 Color	White / Black

Available

ON/OFF



Dimmable

TRIAC

0-10V



DALI

PLC



Decorative reflector(selection) 裝飾反光杯(選擇)




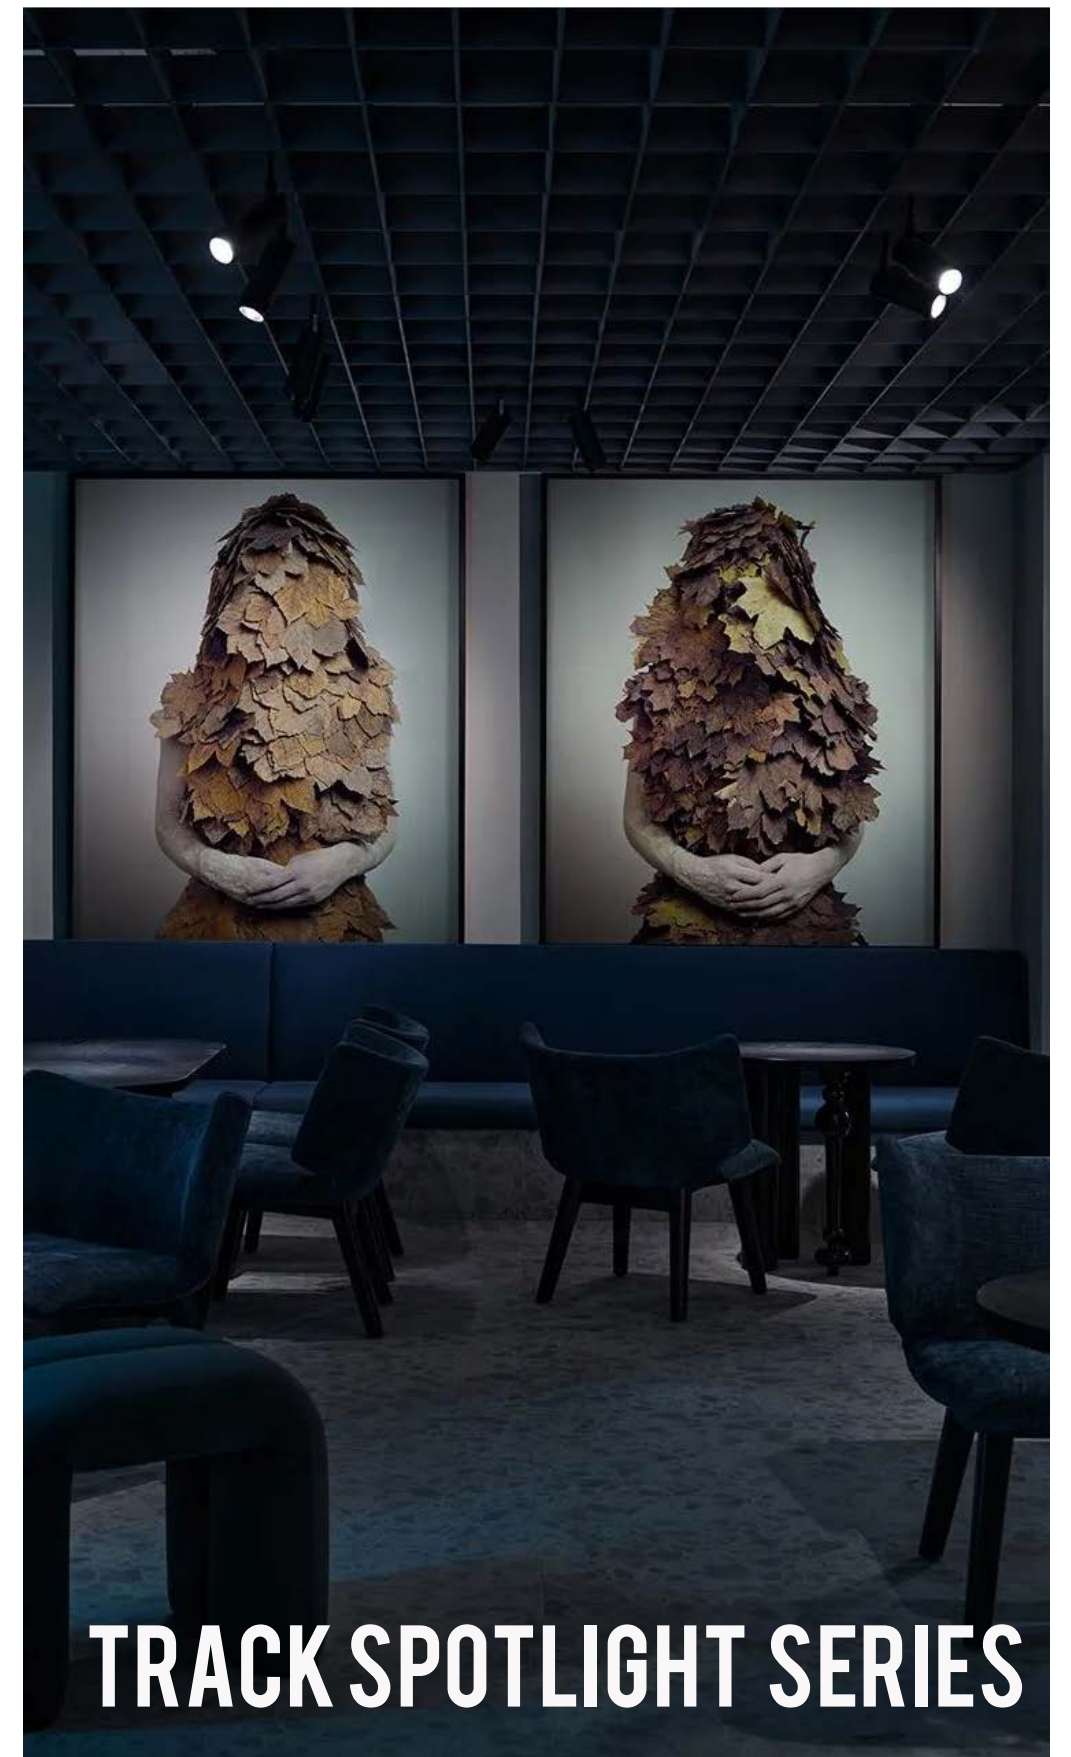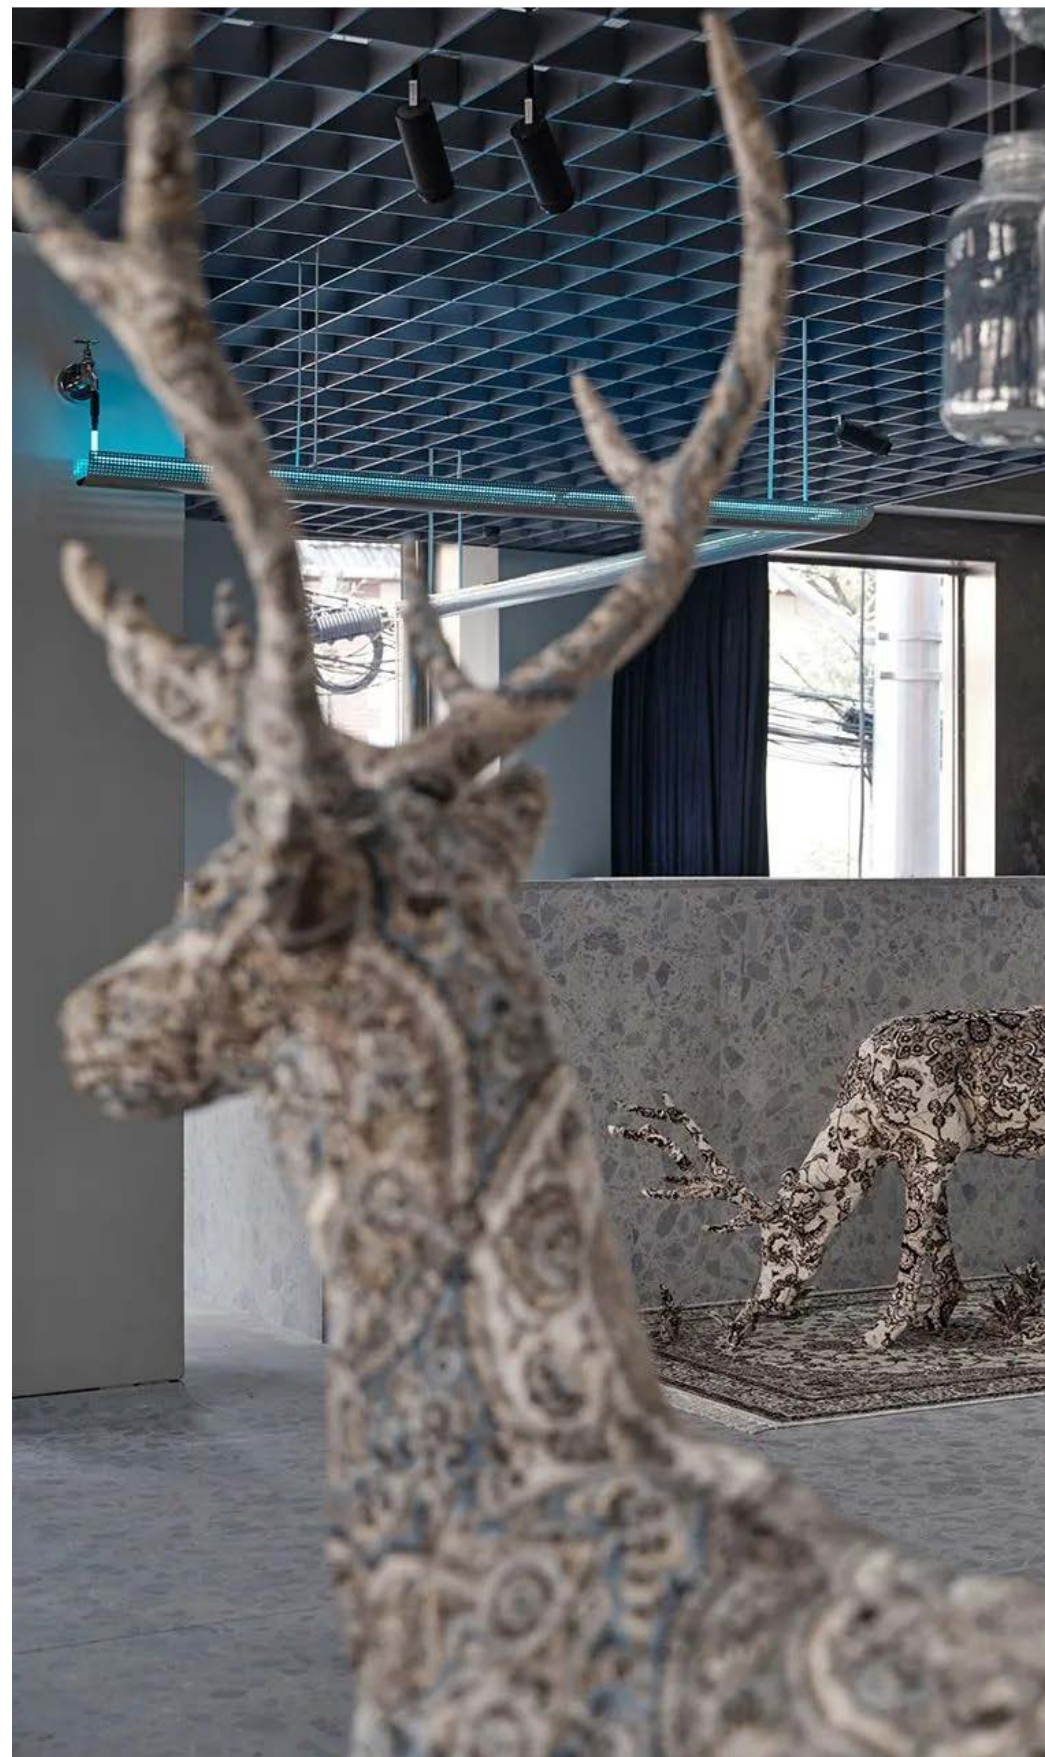

TRACK SPOTLIGHT SERIES

GL-XW3206T LED 兩線軌道燈

-W:白色 -B:黑色



功率 Watts	10W / 15W / 18W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	65lm/W
角度 Beam angle	24° / 38°
顯指 Color rendering index	≥80
電壓 Voltage	AC110V-220V
顏色 Color	White / Black

Available
ON/OFF
TRIAC
0-10V
DALI
PLC




Accessories(option) 配件(選配)



HONEYCOMB LOUVER
防眩蜂巢網

GL-XW3207T LED 兩線軌道燈

-W:白色 -B:黑色




功率 Watts	30W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	70lm/W
角度 Beam angle	24° / 38°
顯指 Color rendering index	≥80
電壓 Voltage	AC110V-220V
顏色 Color	White / Black

Available
ON/OFF
TRIAC
0-10V
DALI
PLC



GL-GTC19-D55 LED 軌道燈

-W:白色 -B:黑色



功率 Watts	5W / 7W / 10W
色溫 Color temperature	2700K / 3000K / 3500K / 4000K / 5700K
光效 Light efficiency	90lm/W
角度 Beam angle	15° / 24° / 38°
顯指 Color rendering index	≥90
電壓 Voltage	AC110V-220V
顏色 Color	White / Black

Available
ON/OFF
TRIAC
0-10V
DALI
PLC



Accessories(option) 配件(選配)



HONEYCOMB LOUVER
防眩蜂巢網



STRETCH DIFFUSER
拉伸片



SOFT LIGHT DIFFUSER
柔光片




SINGLE POLARIZED
單偏片



PLURAL POLARIZED
雙偏片

GL-GTC19-D65 LED 軌道燈

-W:白色 -B:黑色



功率 Watts	15W(H:140mm) 20W / 25W(H:180mm)
色溫 Color temperature	2700K / 3000K / 3500K / 4000K / 5700K
光效 Light efficiency	90lm/W
角度 Beam angle	15° / 24° / 38°
顯指 Color rendering index	≥90
電壓 Voltage	AC110V-220V
顏色 Color	White / Black

Available
ON/OFF
TRIAC
0-10V
DALI
PLC



Accessories(option) 配件(選配)



HONEYCOMB LOUVER
防眩蜂巢網



STRETCH DIFFUSER
拉伸片



SOFT LIGHT DIFFUSER
柔光片





SINGLE POLARIZED
單偏片



PLURAL POLARIZED
雙偏片

GL-S-L670 LED 二線軌道線型燈

-W:白色 -B:黑色





功率 Watts	22W
色溫 Color temperature	4000K / 5000K
光效 Light efficiency	80lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	AC110V-220V
顏色 Color	White / Black

Available
ON/OFF
TRIAC
0-10V
DALI
PLC



GL-S-L1190 LED 二線軌道線型燈

-W:白色 -B:黑色




功率 Watts	44W
色溫 Color temperature	4000K / 5000K
光效 Light efficiency	80lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	AC110V-220V
顏色 Color	White / Black

Available
ON/OFF
TRIAC
0-10V
DALI
PLC



GL-XJE09055A

LED有邊框嵌入式可調節射燈



3° MIRACLE ULTRANARROW




The quadruple anti dazzle structure and anti dazzle cellular network filter the light layer by layer.
The dual lens design is highly focused on the spot.
The extremely narrow 3 ° beam angle achieves high brightness with low power.
The spot transition is natural and soft, creating a delicate spot effect in the lighting space.
四重防眩結構搭配防眩蜂窩網進行層層過濾光線，雙透鏡設計高度聚焦光斑，
極窄3°光束角達到小功率高亮度，光斑過渡自然柔和，在照明空間創造出精緻的光斑效果。

功率 Watts	5W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	50lm/W
角度 Beam angle	3°
顯指 Color rendering index	≥95
電壓 Voltage	AC220V
顏色 Color	White

Available										
ON/OFF										
TRIAC										
0-10V										
DALI										
PLC										


Decorative reflector(selection) 裝飾反光杯(選擇)



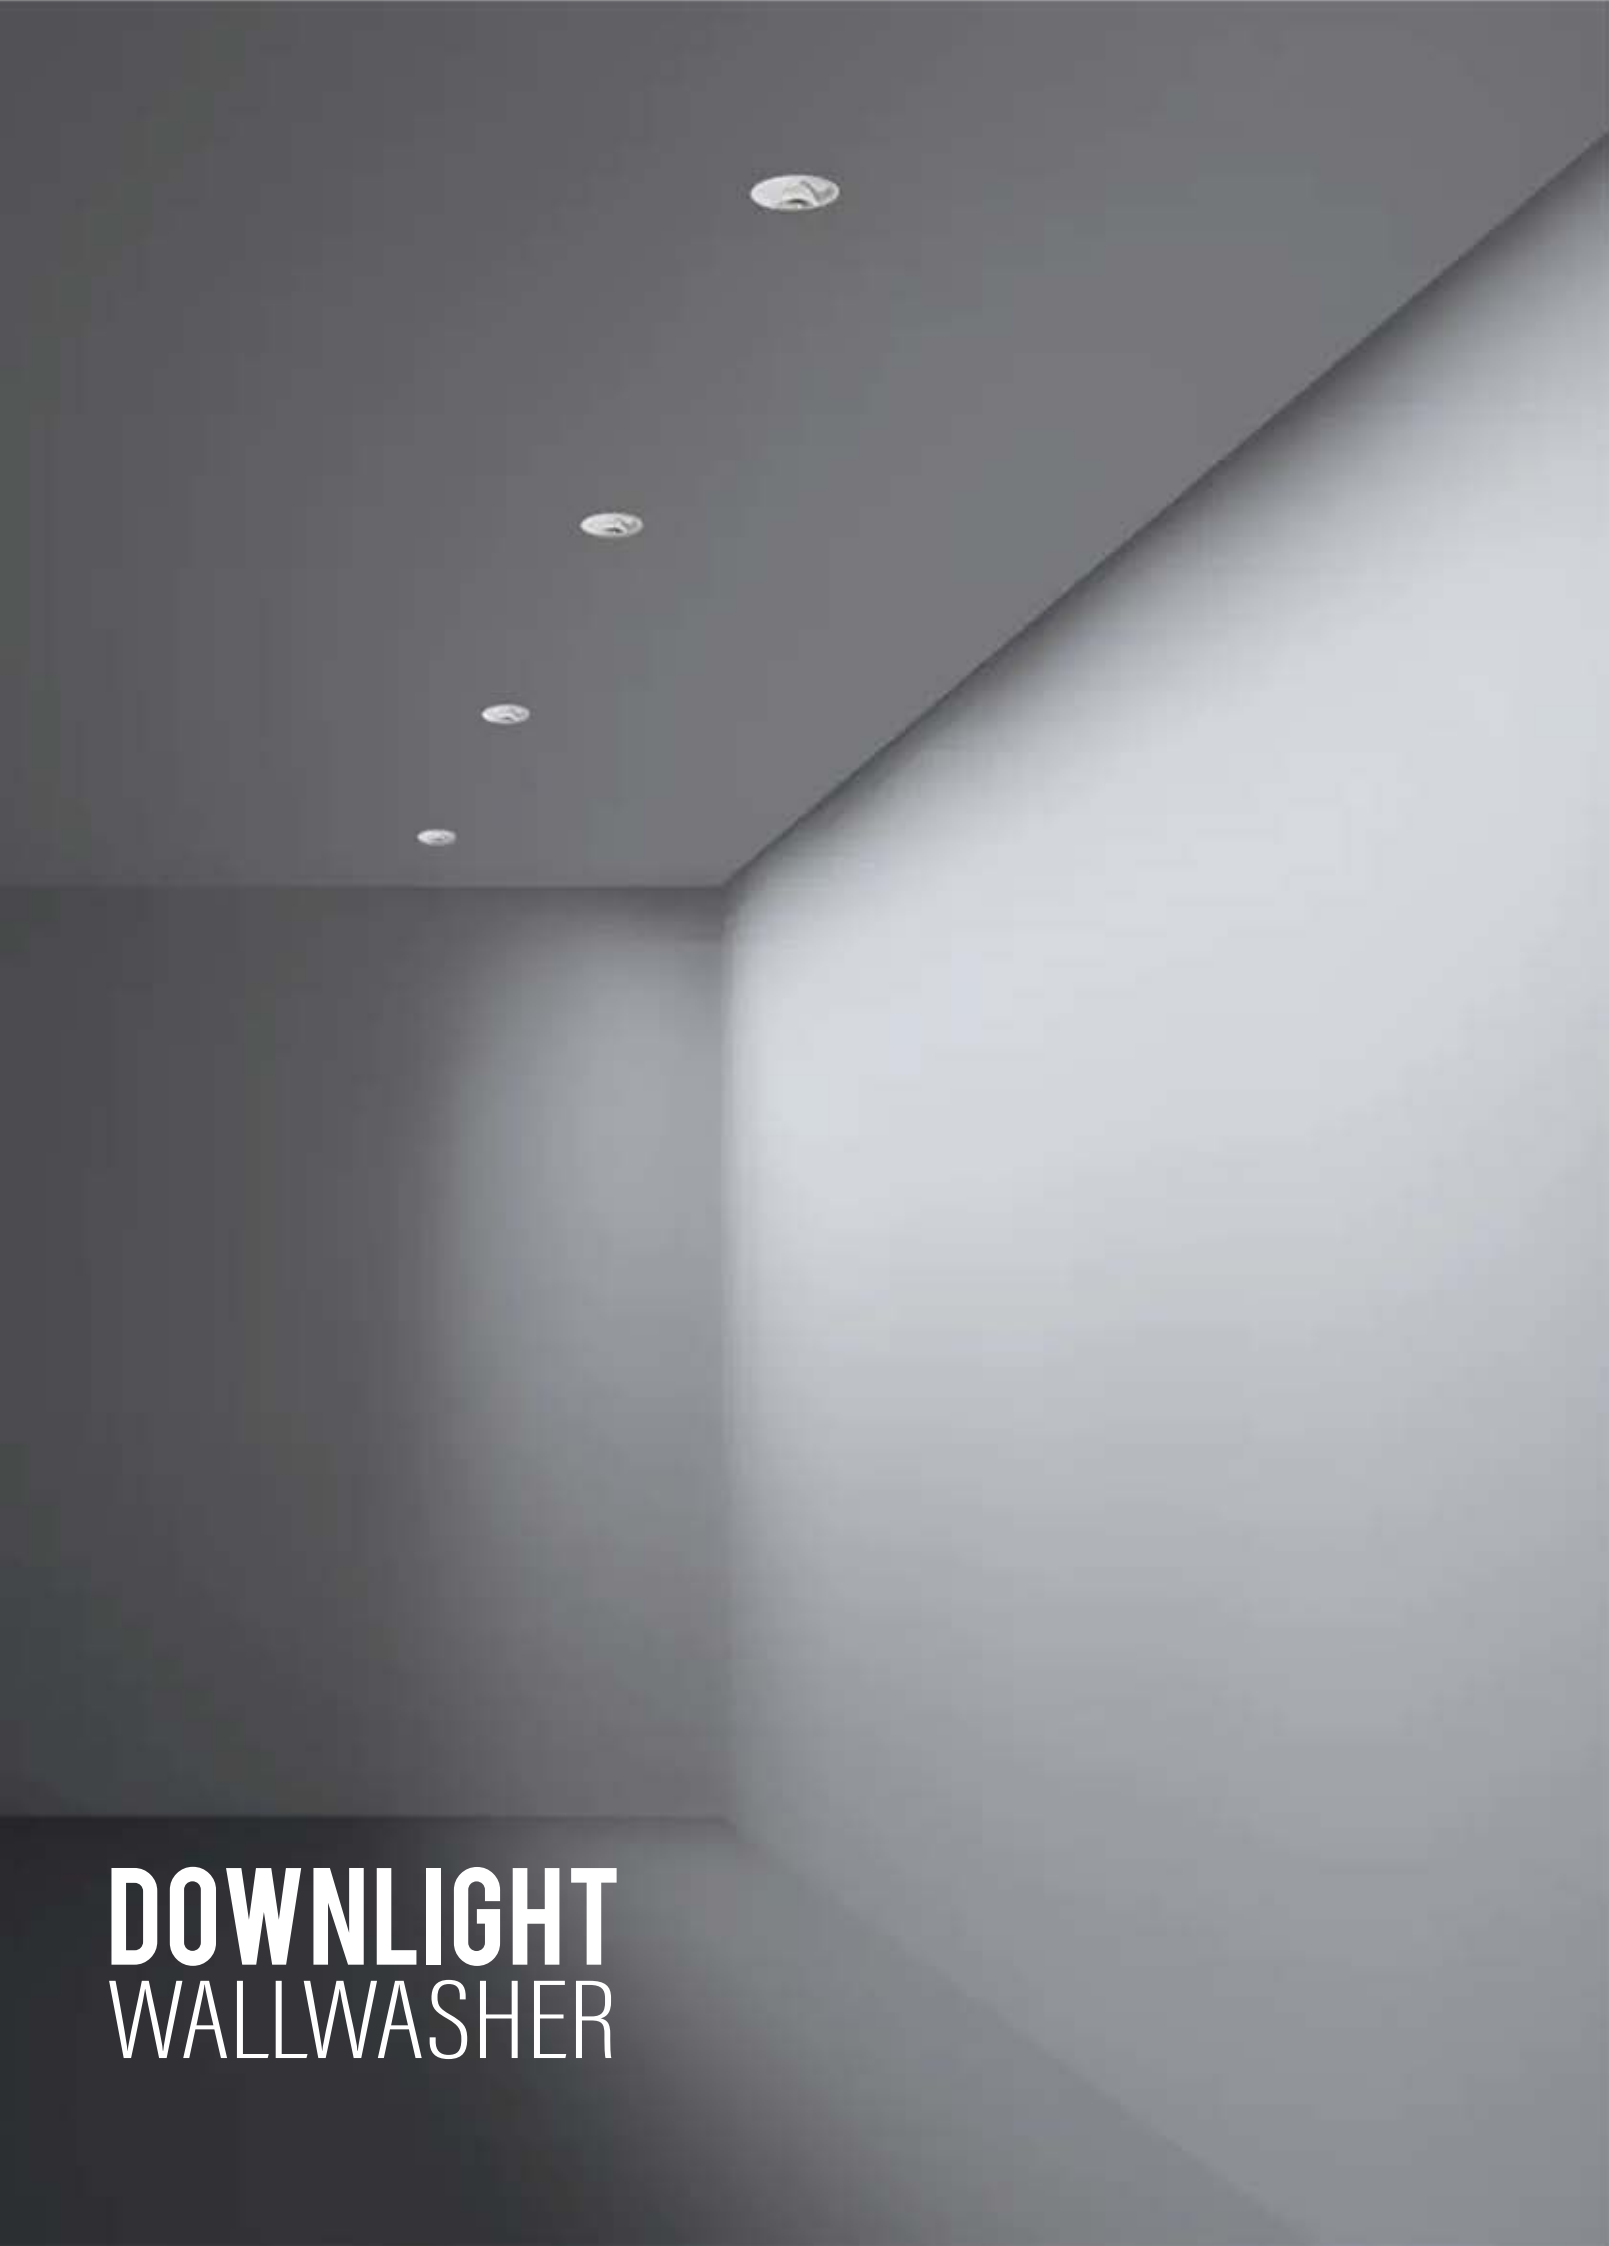

DOWNLIGHT WALLWASHER

GL-ST8376-P75P LED有邊嵌入式偏光洗牆射燈

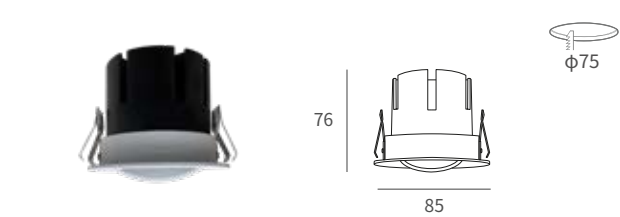

WW

功率 Watts	12W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	65lm/W
角度 Beam angle	Wallwasher
顯指 Color rendering index	≥90
電壓 Voltage	AC110V-220V
顏色 Color	White / Black



Dimmable

Available

ON/OFF

TRIAC

0-10V


DALI

PLC



GL-ST1275

LED鏡前射燈



功率 Watts	12W
色溫 Color temperature	3000K / 3500K / 4000K
光效 Light efficiency	79lm/W
角度 Beam angle	非對稱雙偏光
顯指 Color rendering index	≥90
電壓 Voltage	AC110V-220V
顏色 Color	White
Available	ON/OFF TRIAC 0-10V DALI PLC Dimmable




非對稱
雙偏光



GL-ST8486-S75Q

LED嵌入式射燈(金屬面環)



功率 Watts	12W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	70lm/W
角度 Beam angle	24°
顯指 Color rendering index	≥95
電壓 Voltage	AC110-220V
顏色 Color	White
Available	ON/OFF TRIAC 0-10V DALI PLC Dimmable



24°



Decorative reflector(selection) 裝飾反光杯(選擇)



white
白色



dark chrome
鍍色



black
黑色



chrome
鍍色


DOWNLIGHT
SPOTLIGHT SERIES

Physical profile samples are available upon request for precise slotting.
可先索取實體型材樣品，以便精準開槽。

ZOOM RECESSED SPOTLIGHT

GREAT LIGHTING

GL-WD35-ZPDB-A107 LED豌豆射燈




功率 Watts	7W
色溫 Color temperature	3000K
光效 Light efficiency	45lm/W
角度 Beam angle	8° - 45°
顯指 Color rendering index	≥90
電壓 Voltage	AC110-220V
顏色 Color	Black

Available
ON/OFF
TRIAC
0-10V
DALI
PLC



GL-WX35 LED萬向35調焦射燈

-W:白色 -B:黑色




功率 Watts	7W
色溫 Color temperature	3000K
光效 Light efficiency	70lm/W
角度 Beam angle	8° - 36°
顯指 Color rendering index	≥80
電壓 Voltage	AC110-220V
顏色 Color	White / Black

Available
ON/OFF
TRIAC
0-10V
DALI
PLC



GL-WX75-MNDB2810 LED漫反射射燈

-W:白色 -B:黑色



功率 Watts	10W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	70lm/W
角度 Beam angle	28°
顯指 Color rendering index	≥95
電壓 Voltage	AC110V-220V
顏色 Color	White / Black

Available
ON/OFF
TRIAC
0-10V
DALI
PLC





DIPPER SERIES

DIPPER series has excellent miniaturized linear design of lamps, so that lighting is properly integrated into the modern decorative design style, to provide users with a variety of functional choices, narrow edge, endless, adjustable Angle, stretching, ceiling, etc., suitable for different lighting places.



北斗系列擁有卓越的燈具小型化線型設計，讓照明恰到好處的融入現代裝潢設計風格，提供使用者多元化功能選擇，窄邊、無邊、可調角度、可拉伸、吸頂等，適用於不同的照明場所。



Breakthrough lens optical design

Breakthrough lens optical design of a black hole, so that the light reflectors light intersection, define how the light again, don't let the light refraction on the reflectors, matching reflectors of nano-spray technology, black-light technology upgrades!

突破性的黑洞透鏡光學設計，讓光線在反光罩出光口處交會，重新定義出光方式，讓光不折射到反光罩上，搭配納米噴塗技術的反光罩，讓黑光技術升級！

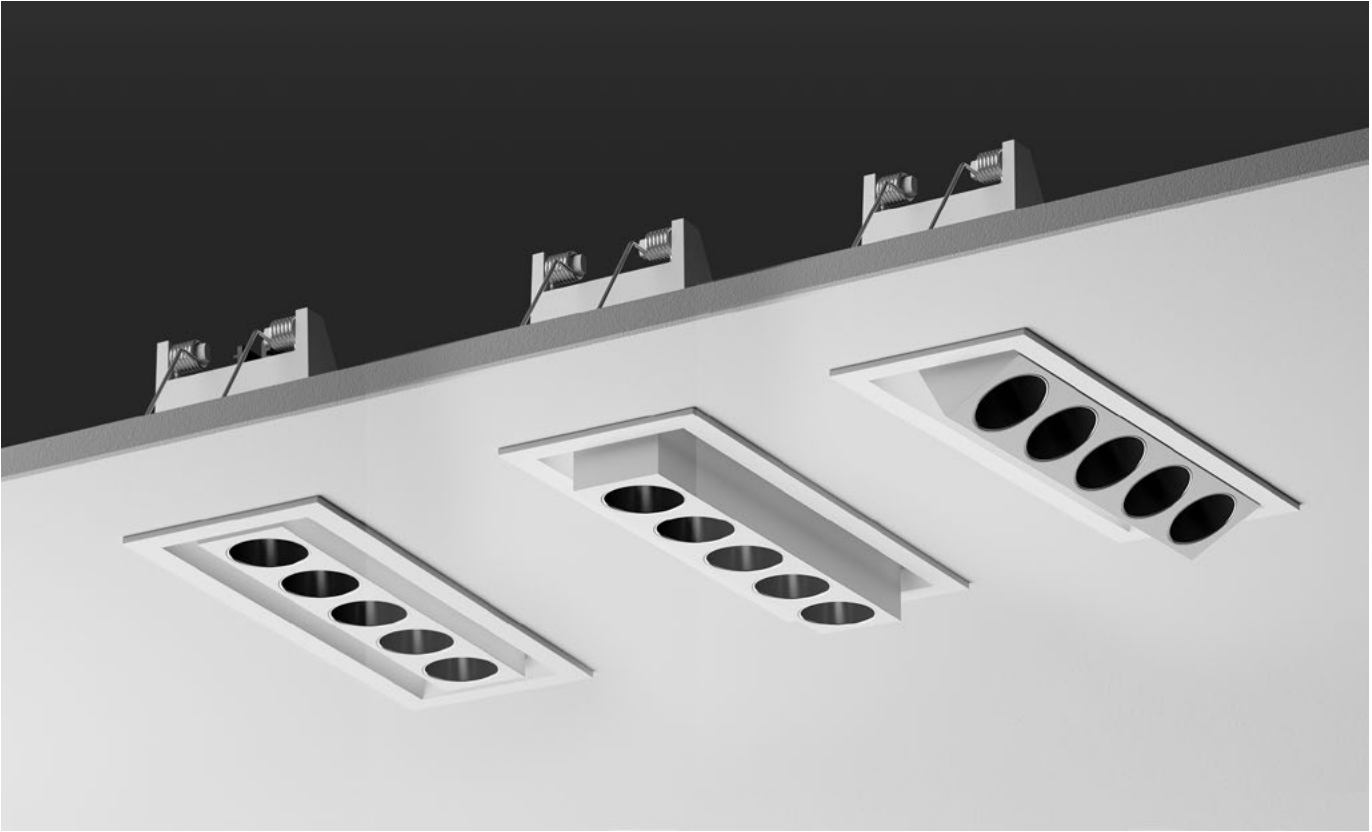
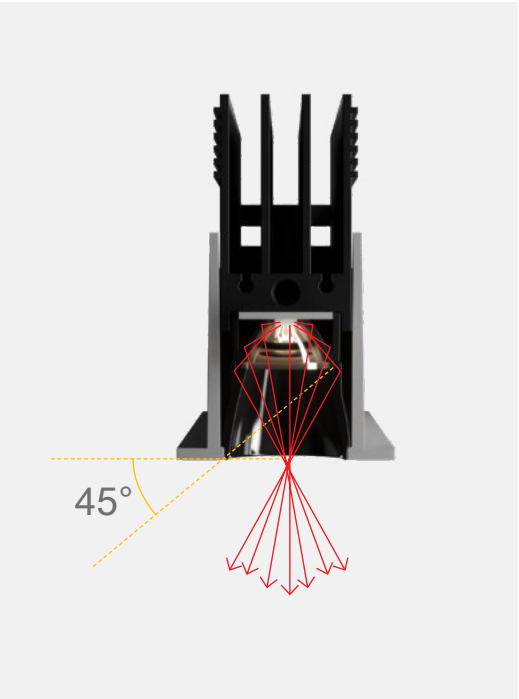


Aluminum Radiator
優質鋁散熱器

High brightness led chip 2w/pcs
高亮度Led芯片 2W/pcs

Hihg transmittance lens
高透光優質透鏡

Black light reflector
黑光處理防眩反射器

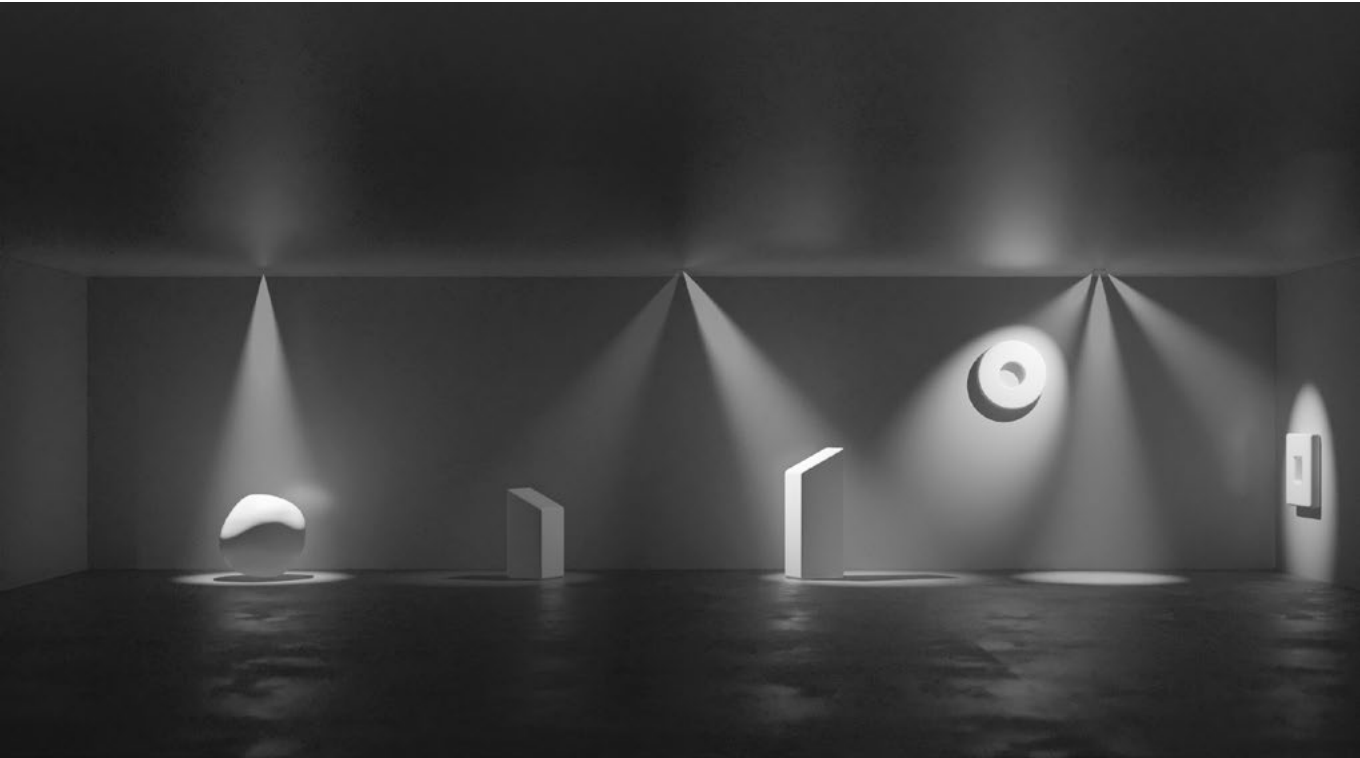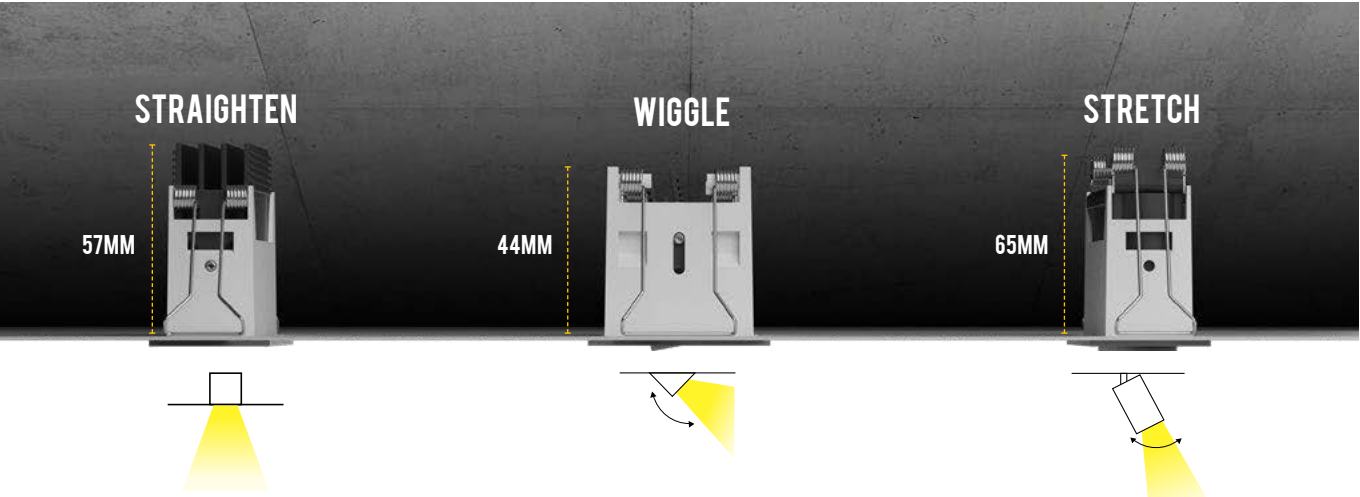


And traditional tube lighting contrast, a high proportion of the Big Dipper has excellent, can adapt to meet a variety of junior high places, card spring structure of the long arm of force, from 1mm sheet metal, multi layer gypsum board to 25mm thick, is easy to control, and ensures easy installation and removal.

Selected for the user to provide a wide range of features: flood,walls washing , directional lights, adjustable, stretch, can be freely combined, the application of different places lighting solutions.

與傳統的筒射燈對比，北斗擁有優良的高度比例，可以適應適應滿足各種底層高場所，長力臂的卡簧結構，從1mm 的金屬板材，到25mm 厚的多層石膏板，皆可輕鬆駕馭，同時可確保輕鬆安裝及拆卸。

提供使用者多元化功能選擇：泛光、洗牆、定向照明，可調角、可拉伸、可自由組合，適用不同場所照明解決方案。

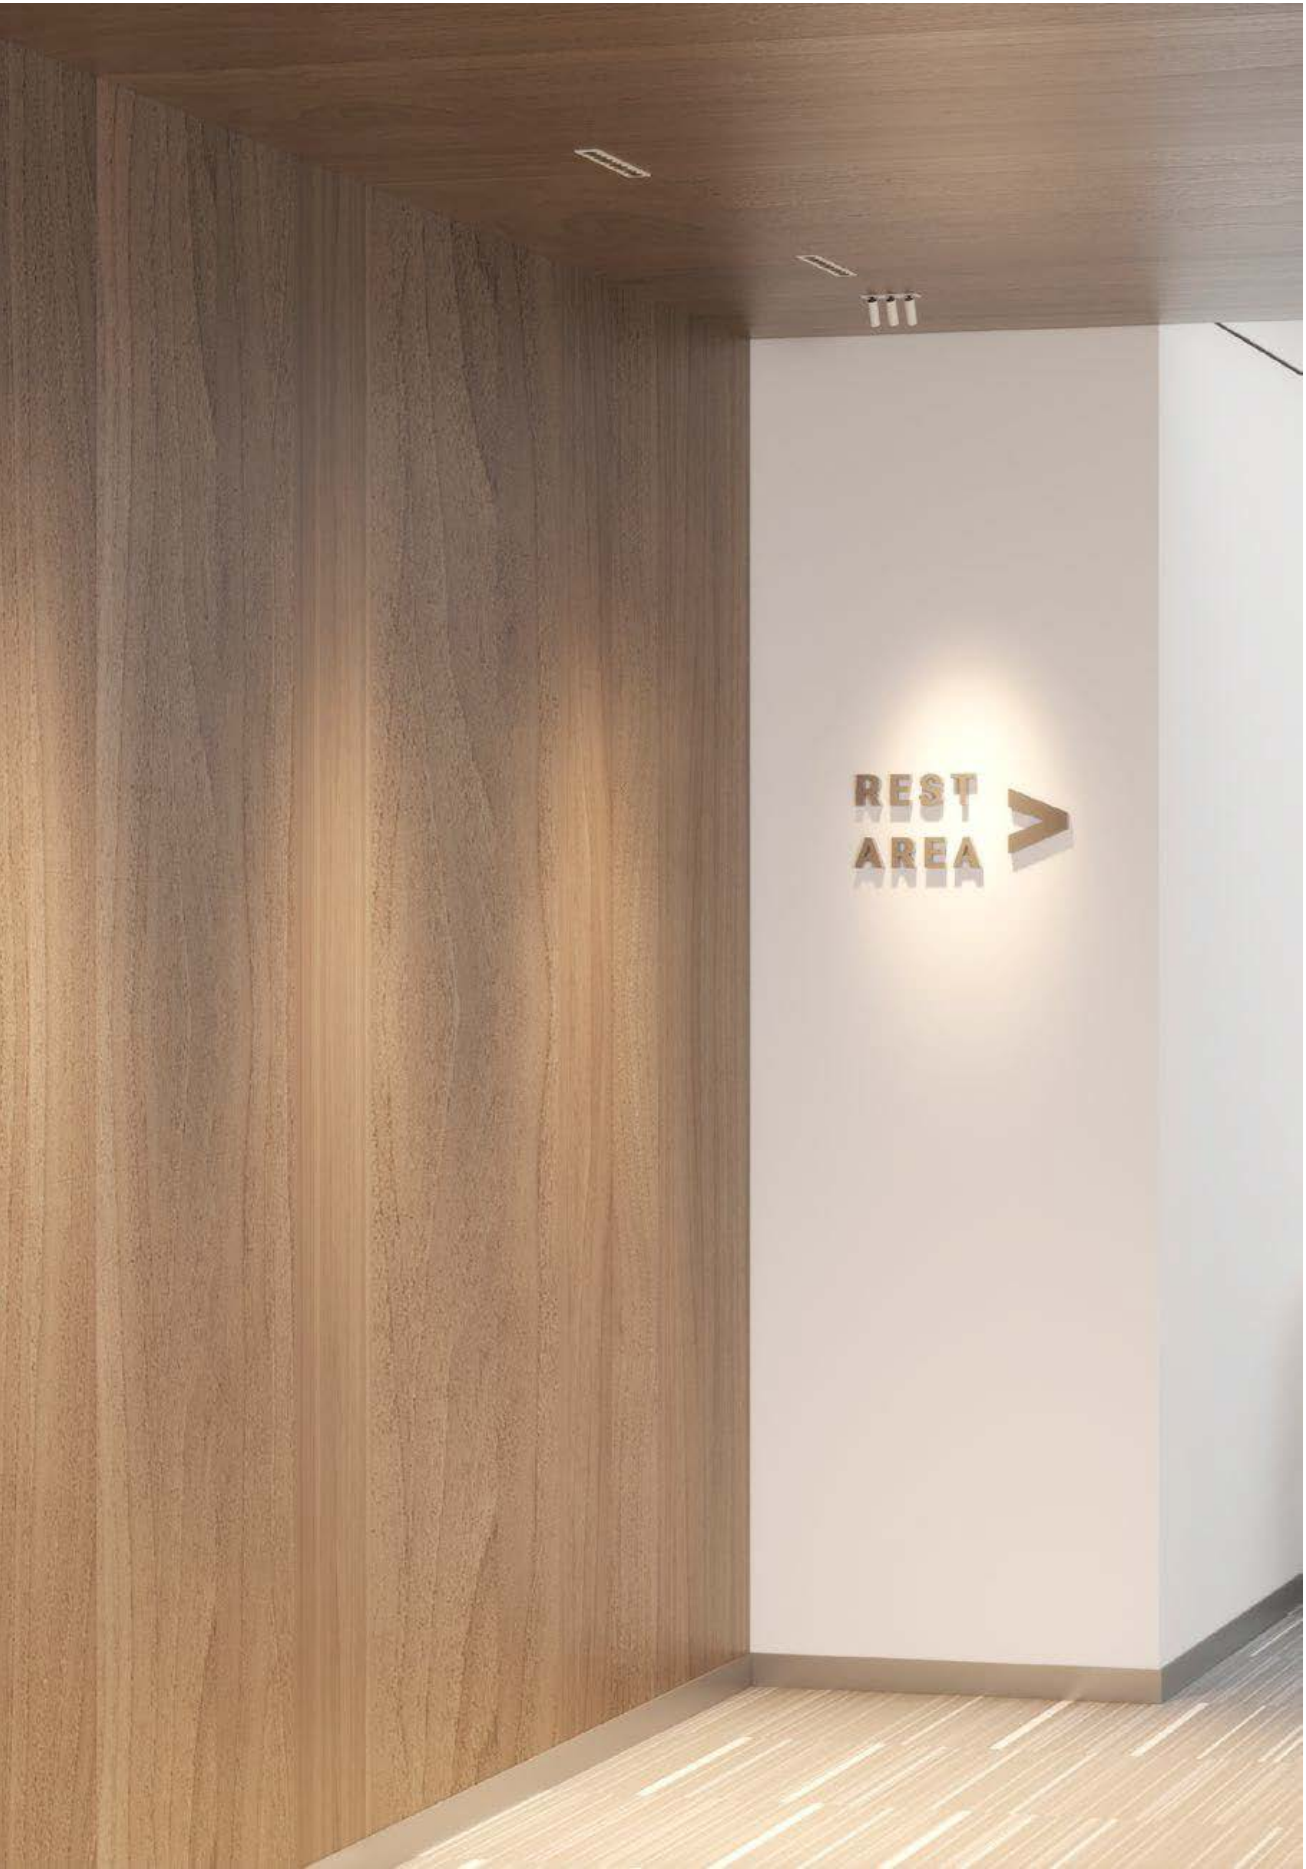

GL-XFE0101FS LED固定式下照不可調單頭射燈



25*25

功率 Watts	1*2W
色溫 Color temperature	2700K / 3000K / 3500K / 4000K
光效 Light efficiency	55lm/W
角度 Beam angle	15° / 24° / 36°
顯指 Color rendering index	≥90
電壓 Voltage	AC220
顏色 Color	White

Available

ON/OFF

TRIAC

0-10V

DALI

PLC

Dimmable

CCC

CE



CB

RoHS

IP 20

UGR<10

GL-XFE0101FST LED固定式無邊框下照不可調預埋單頭射燈



40*40

功率 Watts	1*2W
色溫 Color temperature	2700K / 3000K / 3500K / 4000K
光效 Light efficiency	55lm/W
角度 Beam angle	15° / 24° / 36°
顯指 Color rendering index	≥90
電壓 Voltage	AC220
顏色 Color	White

Available

ON/OFF

TRIAC

0-10V

DALI

PLC

Dimmable

CCC

CE



CB

RoHS

IP 20

UGR<10

GL-XFE0103FS LED固定式下照不可調三頭射燈



73*25

功率 Watts	3*2W
色溫 Color temperature	2700K / 3000K / 3500K / 4000K
光效 Light efficiency	55lm/W
角度 Beam angle	15° / 24° / 36°
顯指 Color rendering index	≥90
電壓 Voltage	AC220
顏色 Color	White

Available

ON/OFF

TRIAC

0-10V

DALI

PLC

Dimmable

CCC

CE


CB

RoHS

IP 20

UGR<10

GL-XFE0103FST LED固定式無邊框下照不可調預埋三頭射燈



86*40

功率 Watts	3*2W
色溫 Color temperature	2700K / 3000K / 3500K / 4000K
光效 Light efficiency	55m/W
角度 Beam angle	15° / 24° / 36°
顯指 Color rendering index	≥90
電壓 Voltage	AC220
顏色 Color	White

Available

ON/OFF

TRIAC

0-10V

DALI

PLC

Dimmable

CCC

CE

CB

RoHS

IP 20

UGR<10

GL-XFE0105FS LED固定式下照不可調五頭射燈



119*25

功率 Watts	5*2W
色溫 Color temperature	2700K / 3000K / 3500K / 4000K
光效 Light efficiency	55lm/W
角度 Beam angle	15° / 24° / 36°
顯指 Color rendering index	≥90
電壓 Voltage	AC220
顏色 Color	White

Available

ON/OFF

TRIAC

0-10V

DALI

PLC

Dimmable

CCC

CE



CB

RoHS

IP 20

UGR<10

GL-XFE0105FST LED固定式無邊框下照不可調預埋五頭射燈



132*40

功率 Watts	5*2W
色溫 Color temperature	2700K / 3000K / 3500K / 4000K
光效 Light efficiency	55m/W
角度 Beam angle	15° / 24° / 36°
顯指 Color rendering index	≥90
電壓 Voltage	AC220
顏色 Color	White

Available

ON/OFF

TRIAC

0-10V

DALI

PLC

Dimmable

CCC

CE



CB

RoHS

IP 20

UGR<10

GL-XFE0110FS LED固定式下照不可調十頭射燈



234*25

功率 Watts	10*2W
色溫 Color temperature	2700K / 3000K / 3500K / 4000K
光效 Light efficiency	55lm/W
角度 Beam angle	15° / 24° / 36°
顯指 Color rendering index	≥90
電壓 Voltage	AC220
顏色 Color	White

Available

ON/OFF

TRIAC

0-10V

DALI

PLC

Dimmable

CCC

CE



CB

RoHS

IP 20

UGR<10

GL-XFE0110FST LED固定式無邊框下照不可調預埋十頭射燈



247*40

功率 Watts	10*2W
色溫 Color temperature	2700K / 3000K / 3500K / 4000K
光效 Light efficiency	55m/W
角度 Beam angle	15° / 24° / 36°
顯指 Color rendering index	≥90
電壓 Voltage	AC220
顏色 Color	White

Available

ON/OFF

TRIAC

0-10V

DALI

PLC

Dimmable

CCC

CE

CB

RoHS


IP 20

UGR<10




DIPPER ADJUSTABLE
SERIES

GL-XFE0103AS LED可調式三頭射燈




功率 Watts	3*2W
色溫 Color temperature	2700K / 3000K / 3500K / 4000K
光效 Light efficiency	55lm/W
角度 Beam angle	15° / 24° / 36°
顯指 Color rendering index	≥90
電壓 Voltage	AC220
顏色 Color	White
Available	ON/OFF TRIAC 0-10V DALI PLC Dimmable CCC CE CB RoHS REACH IP20 UGR<10

GL-XFE0103AST LED可調式無邊框三頭射燈




功率 Watts	3*2W
色溫 Color temperature	2700K / 3000K / 3500K / 4000K
光效 Light efficiency	55lm/W
角度 Beam angle	15° / 24° / 36°
顯指 Color rendering index	≥90
電壓 Voltage	AC220
顏色 Color	White
Available	ON/OFF TRIAC 0-10V DALI PLC Dimmable CCC CE CB RoHS REACH IP20 UGR<10

GL-XFE0105AS LED可調式五頭射燈




功率 Watts	5*2W
色溫 Color temperature	2700K / 3000K / 3500K / 4000K
光效 Light efficiency	55lm/W
角度 Beam angle	15° / 24° / 36°
顯指 Color rendering index	≥90
電壓 Voltage	AC220
顏色 Color	White
Available	ON/OFF TRIAC 0-10V DALI PLC Dimmable CCC CE CB RoHS REACH IP20 UGR<10

GL-XFE0105AST LED可調式無邊框五頭射燈




功率 Watts	5*2W
色溫 Color temperature	2700K / 3000K / 3500K / 4000K
光效 Light efficiency	55m/W
角度 Beam angle	15° / 24° / 36°
顯指 Color rendering index	≥90
電壓 Voltage	AC220
顏色 Color	White
Available	ON/OFF TRIAC 0-10V DALI PLC Dimmable CCC CE CB RoHS REACH IP20 UGR<10

GL-XFE0110AS LED可調式十頭射燈



功率 Watts	10*2W
色溫 Color temperature	2700K / 3000K / 3500K / 4000K
光效 Light efficiency	55lm/W
角度 Beam angle	15° / 24° / 36°
顯指 Color rendering index	≥90
電壓 Voltage	AC220
顏色 Color	White
Available	ON/OFF TRIAC 0-10V DALI PLC Dimmable CCC CE CB RoHS REACH IP20 UGR<10

GL-XFE0110AST LED可調式無邊框十頭射燈




功率 Watts	10*2W
色溫 Color temperature	2700K / 3000K / 3500K / 4000K
光效 Light efficiency	55m/W
角度 Beam angle	15° / 24° / 36°
顯指 Color rendering index	≥90
電壓 Voltage	AC220
顏色 Color	White
Available	ON/OFF TRIAC 0-10V DALI PLC Dimmable CCC CE CB RoHS REACH IP20 UGR<10



DIPPER SPOT SERIES

GL-XFE0201AS


LED可拉伸式有邊框單頭射燈

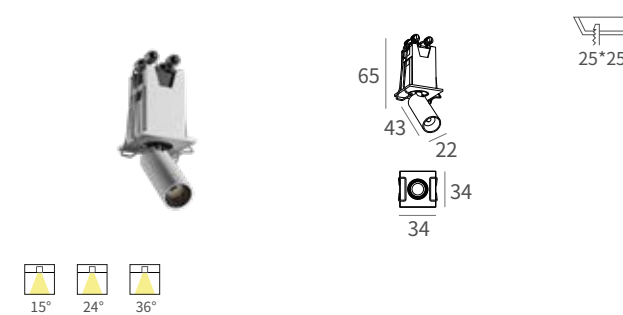

功率 Watts	1*2W
色溫 Color temperature	2700K / 3000K / 3500K / 4000K
光效 Light efficiency	55lm/W
角度 Beam angle	15° / 24° / 36°
顯指 Color rendering index	≥90
電壓 Voltage	AC220
顏色 Color	White
Available	ON/OFF TRIAC 0-10V DALI PLC Dimmable CCC CE CB RoHS REACH 25° 355° IP 20 UGR<19

GL-XFE0203AS


LED可拉伸式有邊框三頭射燈

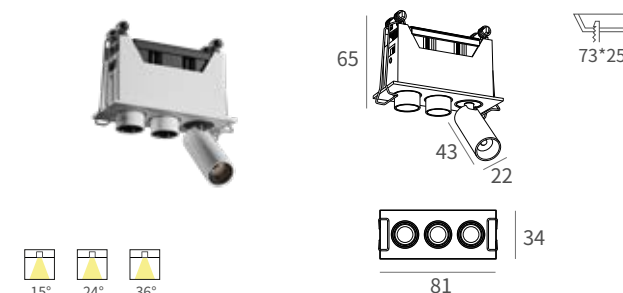

功率 Watts	3*2W
色溫 Color temperature	2700K / 3000K / 3500K / 4000K
光效 Light efficiency	55m/W
角度 Beam angle	15° / 24° / 36°
顯指 Color rendering index	≥90
電壓 Voltage	AC220
顏色 Color	White
Available	ON/OFF TRIAC 0-10V DALI PLC Dimmable CCC CE CB RoHS REACH 25° 355° IP 20 UGR<19

GL-XFE0205AS

LED可拉伸式有邊框五頭射燈

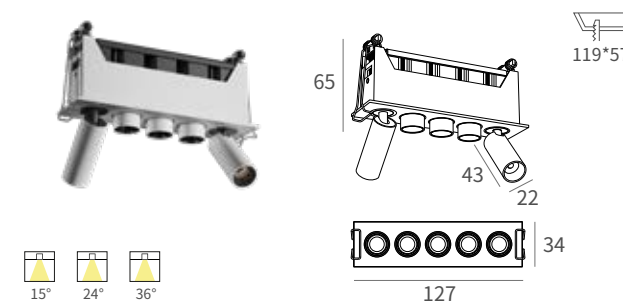


功率 Watts	5*2W
色溫 Color temperature	2700K / 3000K / 3500K / 4000K
光效 Light efficiency	55m/W
角度 Beam angle	15° / 24° / 36°
顯指 Color rendering index	≥90
電壓 Voltage	AC220
顏色 Color	White
Available	ON/OFF TRIAC 0-10V DALI PLC Dimmable CCC CE CB RoHS REACH 25° 355° IP 20 UGR<19




JW SPOT
SERIES

GL-JW2521 明裝48V磁吸軌道



長度 length	1000mm / 2000mm / 3000mm(厚度2mm)
電壓 Voltage	DC48V (WITH DRIVER)
顏色 Colors	Black



GL-JW2521-1
End caps(pairs)

端蓋(一對)



GL-JW2521-4

Flexible electrical connector


轉角電器連接件



GL-JW2521-2

I type electrical connector

I型電器連接件



GL-JW2521-5

Suspension clip panel


吊裝卡扣版(一對)



GL-JW2521-3

Electrical input

電器輸入端



GL-JW2521-6


Screw fastener

螺絲固定件(一組)

MAGNET 48V SYSTEM
JW SERIES

GL-JWR035T

LED磁吸式軌道射燈




功率 Watts	7W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	75lm/W
角度 Beam angle	15° / 24° / 38°
顯指 Color rendering index	≥90
電壓 Voltage	DC48V
顏色 Color	Black
Available	
ON/OFF	☐ Dimmable
0-10V	☐
DALI	☐



GL-JWR045T

LED磁吸式軌道射燈




功率 Watts	10W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	75lm/W
角度 Beam angle	15° / 24° / 38°
顯指 Color rendering index	≥90
電壓 Voltage	DC48V
顏色 Color	Black
Available	
ON/OFF	☐ Dimmable
0-10V	☐
DALI	☐



GL-JWR055T

LED磁吸式軌道射燈




功率 Watts	15W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	75lm/W
角度 Beam angle	15° / 24° / 38°
顯指 Color rendering index	≥90
電壓 Voltage	DC48V
顏色 Color	Black
Available	
ON/OFF	☐ Dimmable
0-10V	☐
DALI	☐



GL-JWR065T

LED磁吸式軌道射燈




功率 Watts	20W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	75lm/W
角度 Beam angle	15° / 24° / 38°
顯指 Color rendering index	≥90
電壓 Voltage	DC48V
顏色 Color	Black
Available	
ON/OFF	☐ Dimmable
0-10V	☐
DALI	☐



GL-JWTJ40T

LED磁吸式可調焦軌道射燈




功率 Watts	7W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	75lm/W
角度 Beam angle	15°~60°
顯指 Color rendering index	≥90
電壓 Voltage	DC48V
顏色 Color	Black
Available	
ON/OFF	☐ Dimmable
0-10V	☐
DALI	☐



GL-JWTJ50T

LED磁吸式可調焦軌道射燈




功率 Watts	12W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	75lm/W
角度 Beam angle	15°~60°
顯指 Color rendering index	≥90
電壓 Voltage	DC48V
顏色 Color	Black
Available	
ON/OFF	☐ Dimmable
0-10V	☐
DALI	☐



GL-JWTJ62T

LED磁吸式可調焦軌道射燈




功率 Watts	18W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	75lm/W
角度 Beam angle	15°~60°
顯指 Color rendering index	≥90
電壓 Voltage	DC48V
顏色 Color	Black
Available	
ON/OFF	☐ Dimmable
0-10V	☐
DALI	☐





GL-JWJ-20-6 LED磁吸式格柵燈




15°



24°


38°

功率 Watts	6W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	75lm/W
角度 Beam angle	15° / 24° / 38°
顯指 Color rendering index	≥90
電壓 Voltage	DC48V
顏色 Color	Black
Available	ON/OFF 0-10V DALI Dimmable



GL-JWJ-20-12 LED磁吸式格柵燈




15°



24°


38°

功率 Watts	12W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	75lm/W
角度 Beam angle	15° / 24° / 38°
顯指 Color rendering index	≥90
電壓 Voltage	DC48V
顏色 Color	Black
Available	ON/OFF 0-10V DALI Dimmable



GL-JWJ-20-18 LED磁吸式格柵燈




15°



24°


38°

功率 Watts	18W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	75lm/W
角度 Beam angle	15° / 24° / 38°
顯指 Color rendering index	≥90
電壓 Voltage	DC48V
顏色 Color	Black
Available	ON/OFF 0-10V DALI Dimmable



GL-JWJ-20-24 LED磁吸式格柵燈




15°


24°


38°



功率 Watts	24W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	75lm/W
角度 Beam angle	15° / 24° / 38°
顯指 Color rendering index	≥90
電壓 Voltage	DC48V
顏色 Color	Black
Available	ON/OFF 0-10V DALI Dimmable





GL-JWT-20-6A

LED磁吸式折疊格柵燈




功率 Watts	6W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	75lm/W
角度 Beam angle	15° / 24° / 38°
顯指 Color rendering index	≥90
電壓 Voltage	DC48V
顏色 Color	Black

Available
ON/OFF
0-10V
DALI



GL-JWT-20-12A

LED磁吸式折疊格柵燈





功率 Watts	12W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	75lm/W
角度 Beam angle	15° / 24° / 38°
顯指 Color rendering index	≥90
電壓 Voltage	DC48V
顏色 Color	Black

Available
ON/OFF
0-10V
DALI



GL-JWT-20-18A

LED磁吸式折疊格柵燈



功率 Watts	18W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	75lm/W
角度 Beam angle	15° / 24° / 38°
顯指 Color rendering index	≥90
電壓 Voltage	DC48V
顏色 Color	Black

Available
ON/OFF
0-10V
DALI



JW EYES
SERIES



JW EYES
SERIES

GL-JWJT-12 LED磁吸式可調180度格柵燈

功率 Watts	6W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	75lm/W
角度 Beam angle	15° / 24° / 38°
顯指 Color rendering index	≥90
電壓 Voltage	DC48V
顏色 Color	Black
Available ON/OFF 0-10V DALI	Dimmable CCCCECB 180° IP20 UGR<19


GL-JWJT-22 LED磁吸式可調180度格柵燈

功率 Watts	12W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	75lm/W
角度 Beam angle	15° / 24° / 38°
顯指 Color rendering index	≥90
電壓 Voltage	DC48V
顏色 Color	Black
Available ON/OFF 0-10V DALI	Dimmable CCCCECB 180° IP20 UGR<19

GL-JWJT-32 LED磁吸式可調180度格柵燈

功率 Watts	18W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	75lm/W
角度 Beam angle	15° / 24° / 38°
顯指 Color rendering index	≥90
電壓 Voltage	DC48V
顏色 Color	Black
Available ON/OFF 0-10V DALI	Dimmable CCCCECB 180° IP20 UGR<19

GL-JWL-20-300 LED磁吸式下照線性燈

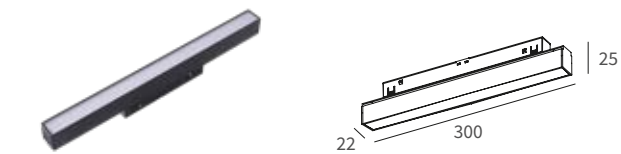


功率 Watts	10W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	75lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC48V
顏色 Color	Black

Available
ON/OFF
0-10V
DALI



GL-JWL-20-600 LED磁吸式下照線性燈

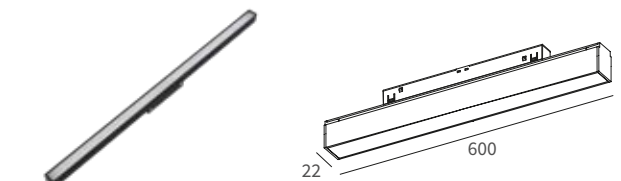


功率 Watts	20W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	75lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC48V
顏色 Color	Black

Available
ON/OFF
0-10V
DALI



GL-JWL-20-900 LED磁吸式下照線性燈

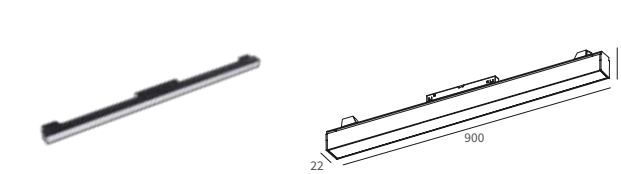

功率 Watts	30W
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	75lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC48V
顏色 Color	Black

Available
ON/OFF
0-10V
DALI



JW LINEARLIGHT
SERIES




BARRISOL SERIES

The biggest advantage is that there is no need to consider the distance between the light strips and cause problems such as dark areas.
The minimum depth of the light source and the barrisol is only 8cm to meet the uniform effect.

最大優勢是無需考慮燈帶之間的距離而造成暗區等問題。光源與拉膜的最小深度僅需8cm即可滿足均勻效果。

GL-SW120

LED單色溫軟模組

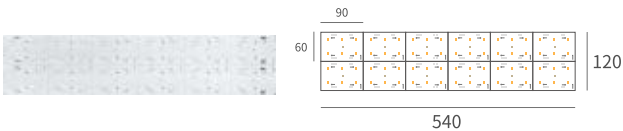

功率 Watts	10W
色溫 Color temperature	3000K / 3500K / 4000K
光效 Light efficiency	1040lm/PCS
角度 Beam angle	N/A
顯指 Color rendering index	≥90
電壓 Voltage	DC24V (需配置變壓器DRIVER REQUIRED)
顏色 Color	N/A
Available	
ON/OFF	☒ Dimmable
TRIAC	☐
0-10V	☐
DALI	☐
PLC	☐



GL-SW576CTA

LED雙色溫軟模組




功率 Watts	15W
色溫 Color temperature	2700K-6000K
光效 Light efficiency	1453lm/PCS
角度 Beam angle	N/A
顯指 Color rendering index	≥90
電壓 Voltage	DC24V (需配置變壓器DRIVER REQUIRED)
顏色 Color	N/A
Available	
ON/OFF	☒ Dimmable ☒ Tunable white
0-10V	☐
DALI	☐
PLC	☐



GL-SW162RGB

LED RGB軟模組

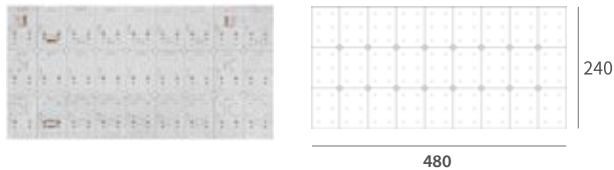

功率 Watts	18W
色溫 Color temperature	RGB
光效 Light efficiency	N/A
角度 Beam angle	N/A
顯指 Color rendering index	≥90
電壓 Voltage	DC24V (需配置變壓器DRIVER REQUIRED)
顏色 Color	N/A
Available	
ON/OFF	☒ Dimmable ☒ RGB
DMX	☐
DALI	☐
PLC	☐



GL-SW162RGBW

LED RGBW軟模組



功率 Watts	24W
色溫 Color temperature	RGBW (W:3000K/4000/6000K (OPTIONS))
光效 Light efficiency	N/A
角度 Beam angle	N/A
顯指 Color rendering index	≥90
電壓 Voltage	DC24V (需配置變壓器DRIVER REQUIRED)
顏色 Color	N/A
Available	
ON/OFF	☒ Dimmable ☒ RGB
DMX	☐
DALI	☐
PLC	☐



Installation

It can be installed on smooth and curved surface.




Cutttable

It's cuttable basing on the cutting line. Please ture off the power when cutting.



Welding and splicing

Easy welding and splicing with fast one - touch connector, helpful for construction.



安裝

它可以安裝在光滑和彎曲的表面上






可裁剪

它可以根據切割線進行切割，裁剪時請關閉電源。



焊接和拼接

快速一鍵式輕鬆焊接和拼接連接器，有利於施工。

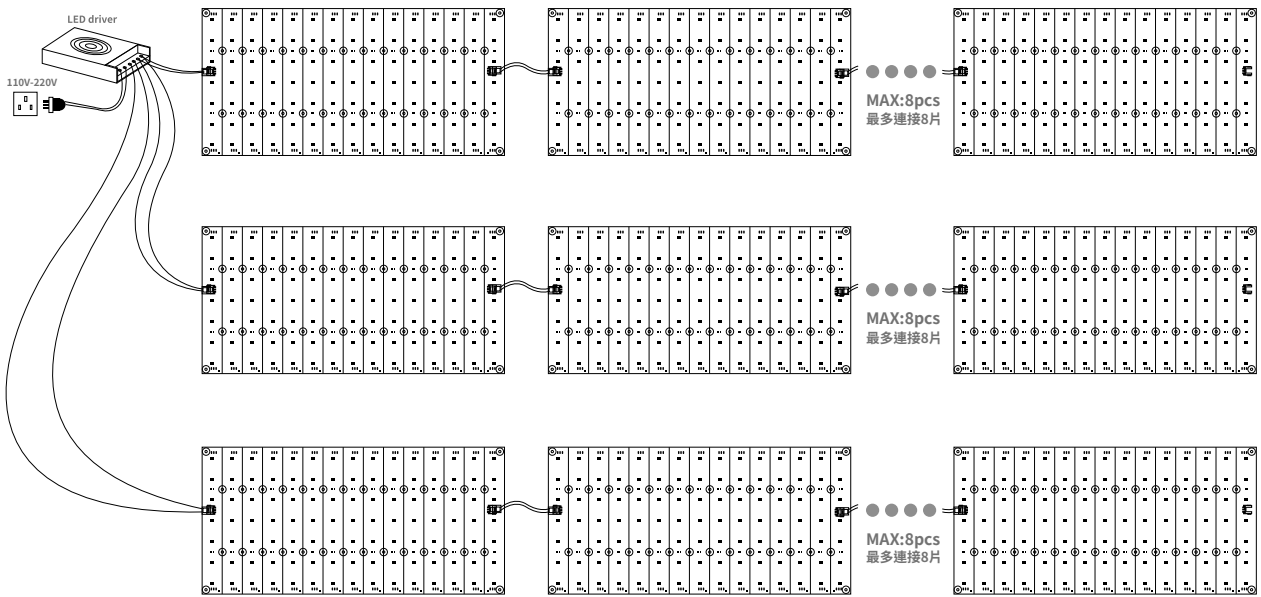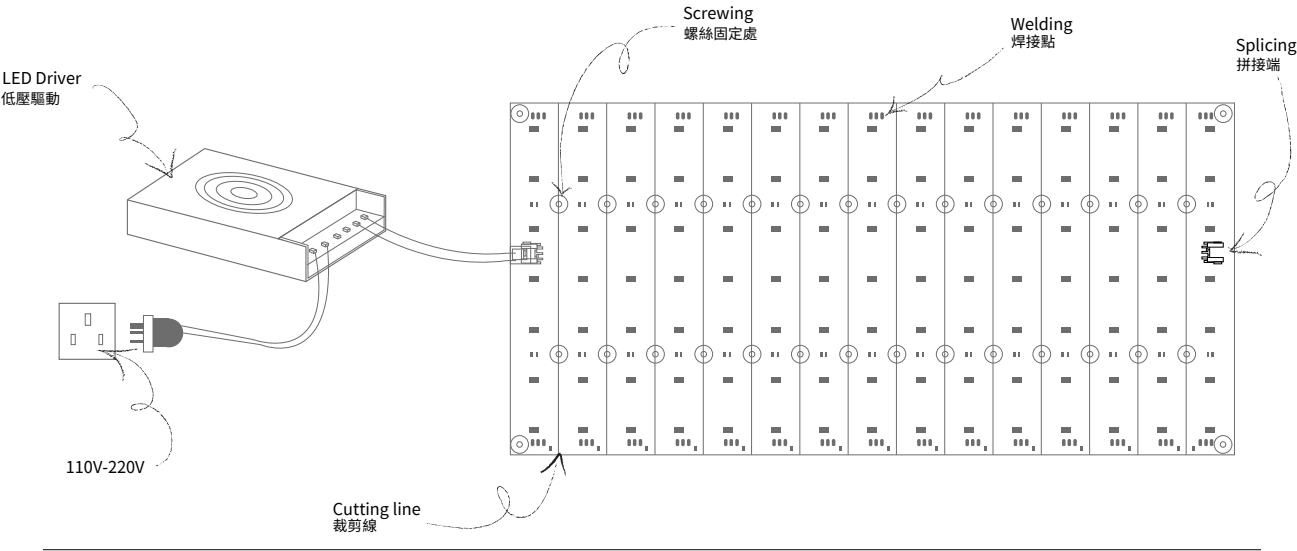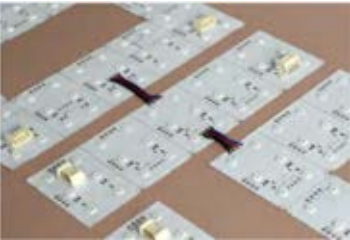

LU MAGNETIC TRACK SERIES




GL-LTA165

平面式磁吸軌道

-W:白色 -B:黑色 -S:銀色



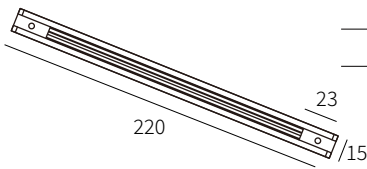

長度 length	2500mm (MAX)
電壓 Voltage	DC12V / DC24V (WITH DRIVER)
顏色 Colors	White / Black / Silver

Suspension Wire Accessories 導線配件

GL-LUB238



track connector
軌道連接器

GL-LUB1068



power connector
電源連接器

IP


20

GL-LTB140

圓柱式磁吸軌道

-W:白色 -B:黑色 -S:銀色





螺絲台面固定

開孔螺帽固定

長度 length	2500mm (MAX)
電壓 Voltage	DC12V / DC24V (WITH DRIVER)
顏色 Colors	White / Black / Silver

Suspension Wire Accessories 導線配件

GL-LUB238



track connector
軌道連接器

GL-LUB1068



power connector
電源連接器


IP

20

GL-LTC120-6

LED透明磁吸導線





電流 Electric current	1A
電壓 Voltage	DC12V / DC24V
長度 Length	120cm (厚度0.1mm)

Transparent Suspension Wire Accessories 透明導線配件

GL-PET43016



oval base
橢圓盤底座

GL-PET3610



power connector
電源連接器

IP


20

GL-LUB7517-P-2W

LED磁吸式小射燈

-W:白色 -B:黑色 -S:銀色





功率 Watts	2W
色溫 Color temperature	3000K / 4000K / 6000K
光效 Light efficiency	210lm/W
角度 Beam angle	8° / 25° / 45° / 80°
顯指 Color rendering index	≥90
電壓 Voltage	DC12V / DC24V
顏色 Color	Black / Silver / Gold

Available

ON/OFF

Dimmable

90°

355°

IP


20

GL-LUB7520-P-1W

LED磁吸式小射燈

-W:白色 -B:黑色 -S:銀色





功率 Watts	1W
色溫 Color temperature	3000K / 4000K / 6000K
光效 Light efficiency	150lm/W
角度 Beam angle	8° / 25° / 45° / 80°
顯指 Color rendering index	≥90
電壓 Voltage	DC12V / DC24V
顏色 Color	White / Black / Silver / Gold

Available

ON/OFF

Dimmable

90°

355°

IP


20

GL-LUB7523-P-3W

LED磁吸式可調焦小射燈

-W:白色 -B:黑色 -S:銀色





功率 Watts	3W
色溫 Color temperature	3000K / 4000K / 6000K
光效 Light efficiency	210lm/W
角度 Beam angle	10° - 60° (adjustable)
顯指 Color rendering index	≥90
電壓 Voltage	DC12V / DC24V
顏色 Color	Black / Silver

Available

ON/OFF

Dimmable

90°

355°

IP

20


UGR<19

GL-LUB7527-P-3W

LED磁吸式小射燈

-W:白色 -B:黑色 -S:銀色





功率 Watts	3W
色溫 Color temperature	3000K / 4000K / 6000K
光效 Light efficiency	300lm/W
角度 Beam angle	15° / 30° / 60°
顯指 Color rendering index	≥90
電壓 Voltage	DC12V / DC24V
顏色 Color	White / Black / Silver / Gold

Available

ON/OFF

Dimmable

90°

355°

IP

20

LU



SURFACE SOPTLIGHT

SERIES



GL-LUB7517-3-2W LED明裝小射燈




-W:白色 -B:黑色 -S:銀色



功率 Watts	1*2W
色溫 Color temperature	3000K / 4000K / 6000K
光效 Light efficiency	210lm/W
角度 Beam angle	8° / 25° / 45° / 80°
顯指 Color rendering index	≥90
電壓 Voltage	DC 12V
顏色 Color	White / Black / Silver
Available ON/OFF	☐ Dimmable ☐
CCC CE CB RoHS IP20 UGR<19	

GL-LUB7520-3-1W LED明裝小射燈


-W:白色 -B:黑色 -S:銀色



功率 Watts	1*1W
色溫 Color temperature	3000K / 4000K / 6000K
光效 Light efficiency	150lm/W
角度 Beam angle	8° / 25° / 45° / 80°
顯指 Color rendering index	≥90
電壓 Voltage	DC 12V
顏色 Color	White / Black / Silver
Available ON/OFF	☐ Dimmable ☐
CCC CE CB RoHS IP20 UGR<19	

GL-LUB7523-3-3W LED明裝小射燈




-W:白色 -B:黑色 -S:銀色




功率 Watts	1*3W
色溫 Color temperature	3000K / 4000K / 6000K
光效 Light efficiency	210lm/W
角度 Beam angle	10° - 60°(Adjustable)
顯指 Color rendering index	≥90
電壓 Voltage	DC 12V
顏色 Color	Black / Silver
Available ON/OFF	☐ Dimmable ☐
CCC CE CB RoHS IP20 UGR<19	

GL-LUB7527-3-3W LED明裝小射燈

-W:白色 -B:黑色 -S:銀色




功率 Watts	4*0.8W
色溫 Color temperature	3000K / 4000K / 6000K
光效 Light efficiency	300lm/W
角度 Beam angle	15° / 30° / 60°
顯指 Color rendering index	≥90
電壓 Voltage	DC 12V
顏色 Color	White / Black / Silver
Available ON/OFF	☐ Dimmable ☐
CCC CE CB RoHS IP20 UGR<19	

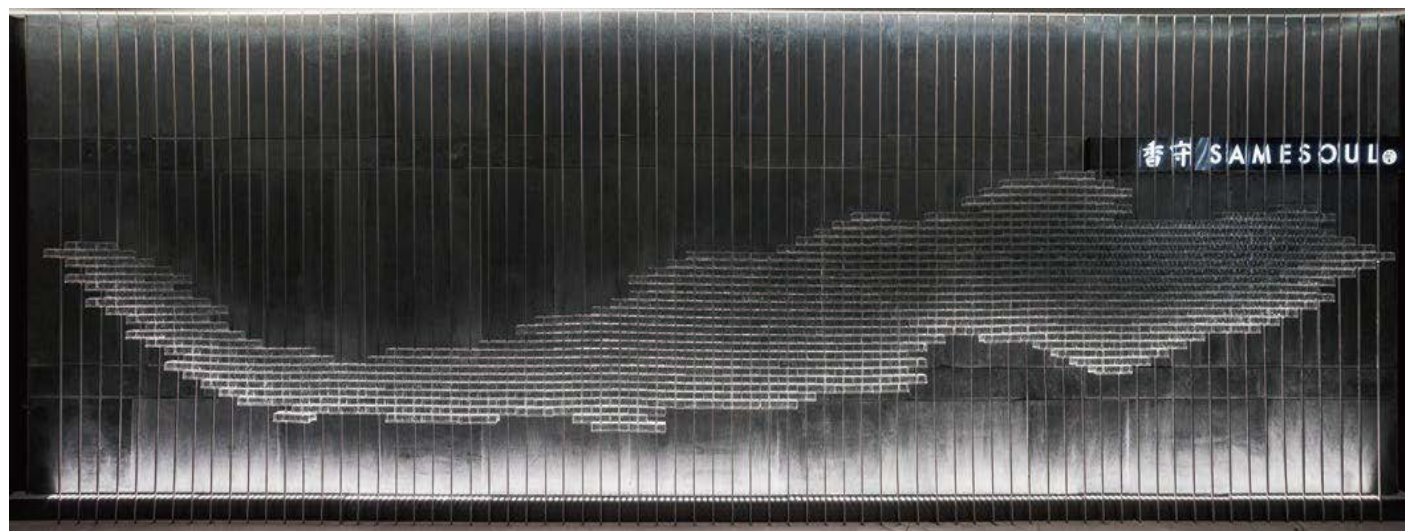

OUT DOOR WALLWASHER
SERIES

GL-SXH025WP

LED平面洗牆燈-IP65

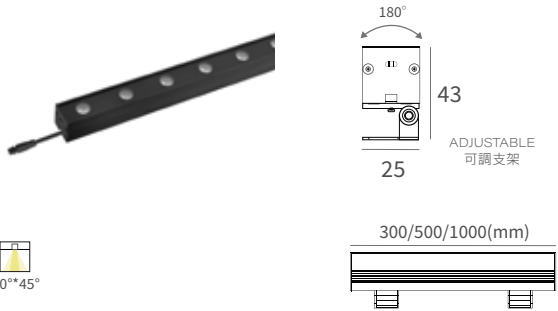

功率 Watts	6W/0.3M 12W/0.5M 24W/1M
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	70lm/W
角度 Beam angle	25°*45°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	White / Black

Available

ON/OFF

TRIAC

0-10V

DALI

PLC

Dimmable

Accessories 配件

POWER CABLE 電源線

CCC

CE

CB


RoHS

IP 65

180°

GL-SXH025WL

LED格柵洗牆燈-IP65

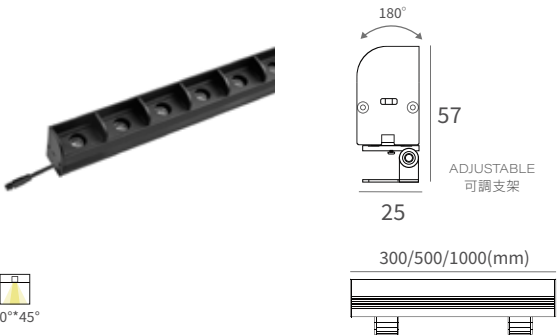

功率 Watts	7W/0.3M 12W/0.5M 24W/1M
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	75lm/W
角度 Beam angle	25°*45°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	White / Black

Available

ON/OFF

TRIAC

0-10V

DALI

PLC

Dimmable

Accessories 配件

POWER CABLE 電源線

CCC

CE

CB

RoHS


IP 65

180°

UCR<15

GL-SXH025WL

LED格柵洗牆燈-IP65

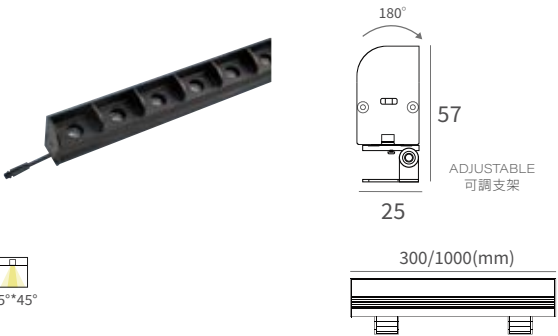

功率 Watts	9W/0.3M 24W+24W/1M
色溫 Color temperature	2700K-6000K
光效 Light efficiency	75lm/W
角度 Beam angle	25° x 45°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	Black

Available

ON/OFF

TRIAC

0-10V

DALI

PLC

Tunable white

Accessories 配件

POWER CABLE 電源線

CCC

CE

CB

RoHS


IP 65

180°

UCR<15

GL-ZD2527

LED柔性硅膠洗牆燈

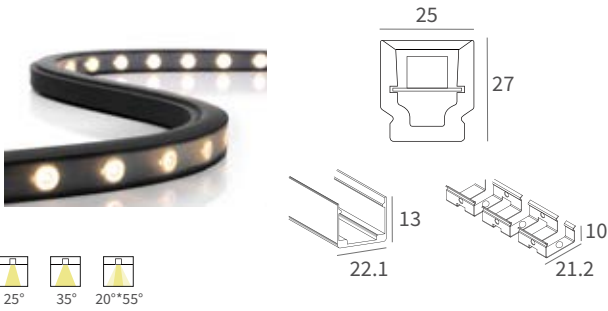

功率 Watts	24W/M
色溫 Color temperature	3000K / 4000K
光效 Light efficiency	80lm/W
角度 Beam angle	25° / 35° / 20°*55°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	Black

Available

ON/OFF

TRIAC

0-10V

DALI

PLC

Dimmable

Accessories 配件

POWER CABLE 電源線

CCC

CE

CB

RoHS

IP 65

180°

Physical profile samples are available upon request for precise slotting.
可先索取實體型材樣品，以便精準開槽。




Physical profile samples are available upon request for precise slotting.
可先索取實體型材樣品，以便精準開槽。



OUT DOOR SPOT LIGHT SERIES


GL-TD50903W LED戶外投射燈



功率 Watts	3W
色溫 Color temperature	3000K
光效 Light efficiency	75lm/W
角度 Beam angle	30°
顯指 Color rendering index	≥80
電壓 Voltage	DC24V or AC100-220V
顏色 Color	Black
Available	☐ Dimmable
ON/OFF	☐
TRIAC	☐
0-10V	☐
DALI	☐
PLC	☐




GL-TD50905W LED戶外投射燈



功率 Watts	5W
色溫 Color temperature	3000K
光效 Light efficiency	75lm/W
角度 Beam angle	30°
顯指 Color rendering index	≥80
電壓 Voltage	DC24V or AC100-220V
顏色 Color	Black
Available	☐ Dimmable
ON/OFF	☐
TRIAC	☐
0-10V	☐
DALI	☐
PLC	☐




GL-TD509010W LED戶外投射燈



功率 Watts	10W
色溫 Color temperature	3000K
光效 Light efficiency	75lm/W
角度 Beam angle	30°
顯指 Color rendering index	≥80
電壓 Voltage	DC24V or AC100-220V
顏色 Color	Black
Available	☐ Dimmable
ON/OFF	☐
TRIAC	☐
0-10V	☐
DALI	☐
PLC	☐



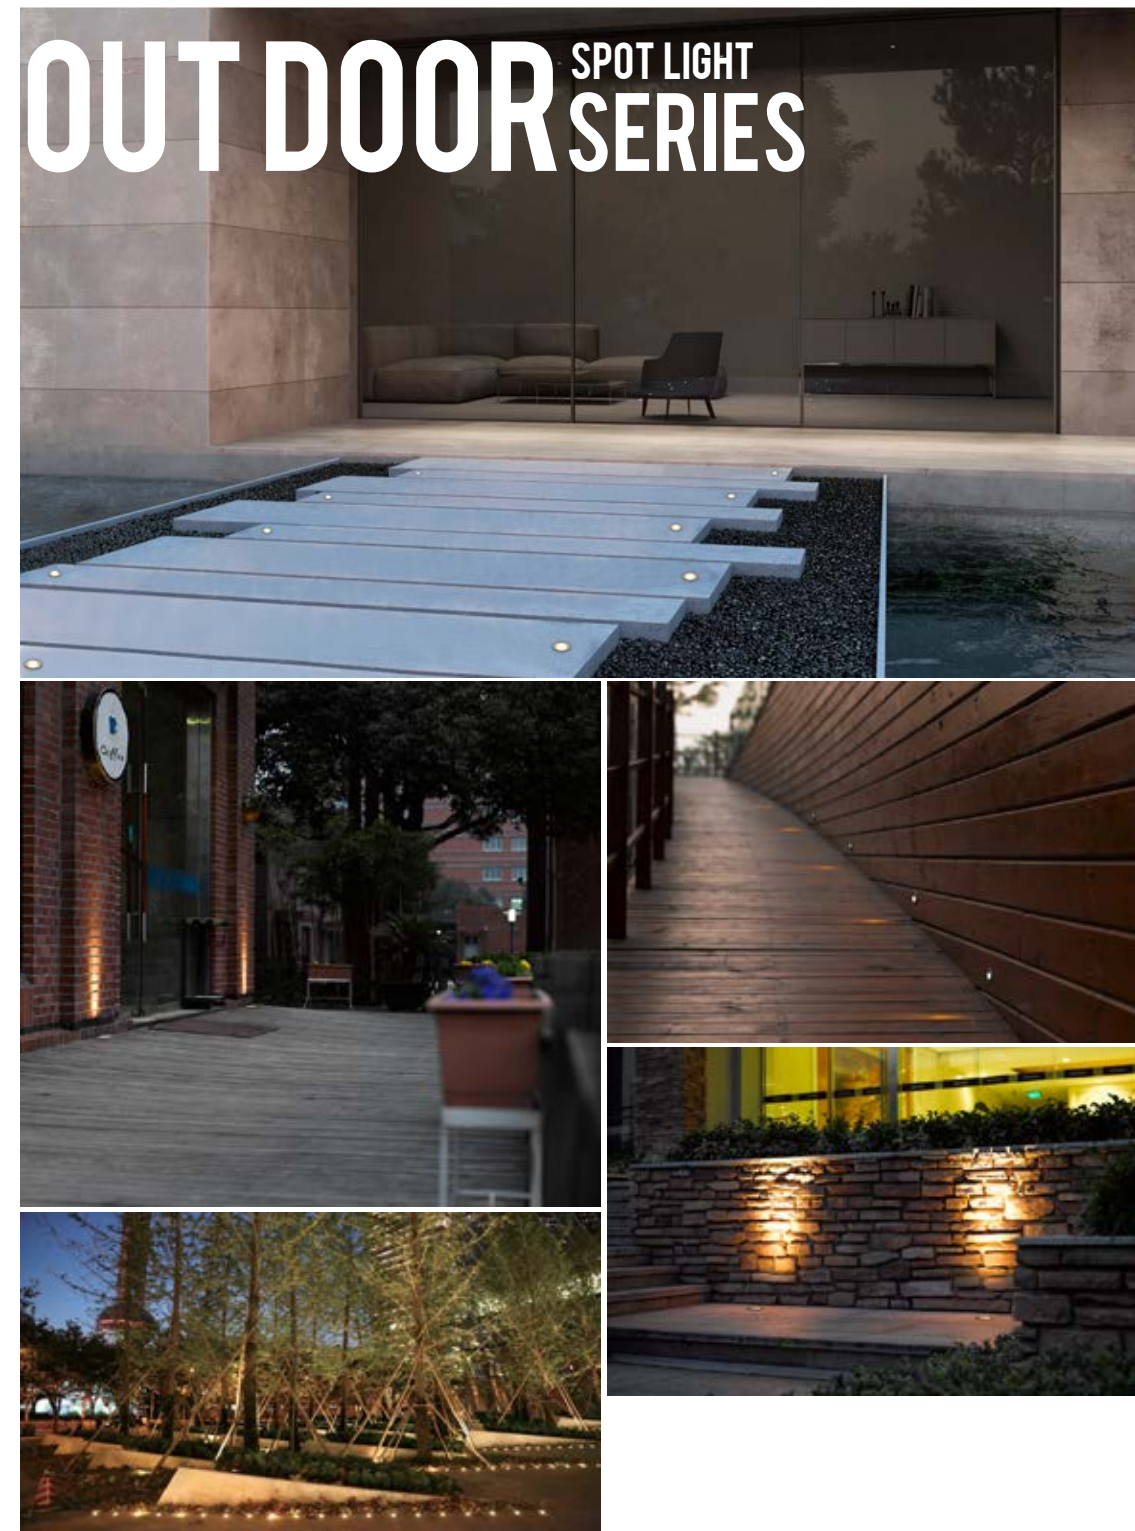


GL-BX024

LED地埋燈



30°



功率 Watts	3W
色溫 Color temperature	3000K
光效 Light efficiency	40lm/W
角度 Beam angle	30°
顯指 Color rendering index	≥90
電壓 Voltage	AC100-240V
顏色 Color	Sliver

Available

ON/OFF

TRIAC

0-10V

DALI

PLC



30°




GL-BX001D

LED地埋燈



30°



功率 Watts	3W
色溫 Color temperature	3000K
光效 Light efficiency	40lm/W
角度 Beam angle	30°
顯指 Color rendering index	≥90
電壓 Voltage	AC100-240V
顏色 Color	Sliver

Available

ON/OFF

TRIAC

0-10V

DALI



PLC



30°



Single lamp installation

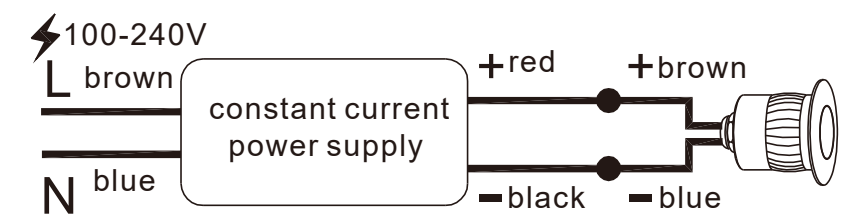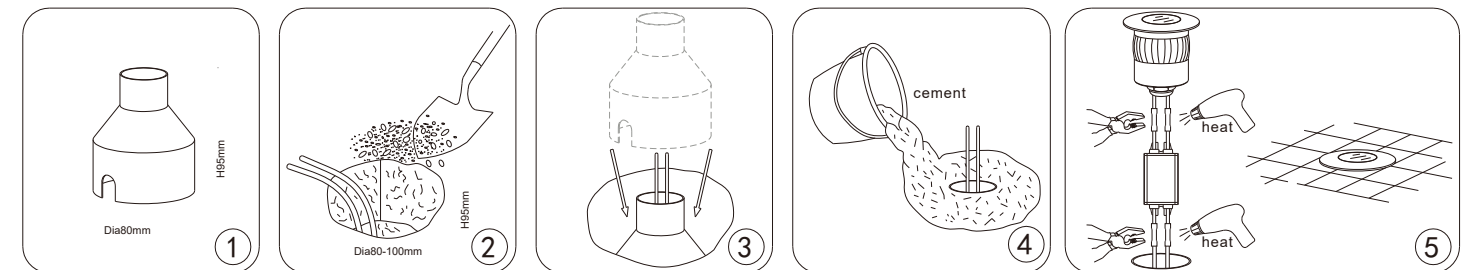

600mA 1x3W for BX024/BX001D

GL-HL175 LED吸頂燈



功率 Watts	12W
色溫 Color temperature	3000K / 4000K / 6000K
光效 Light efficiency	150lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥80
電壓 Voltage	AC110V
顏色 Color	White

Available						
ON/OFF						
TRIAC						
0-10V						
DALI						
PLC						

GL-HL225 LED吸頂燈



功率 Watts	18W
色溫 Color temperature	3000K / 4000K / 6000K
光效 Light efficiency	150lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥80
電壓 Voltage	AC110V
顏色 Color	White

Available						
ON/OFF						
TRIAC						
0-10V						
DALI						
PLC						

GL-HL300 LED吸頂燈




功率 Watts	24W
色溫 Color temperature	3000K / 4000K / 6000K
光效 Light efficiency	150lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥80
電壓 Voltage	AC110V
顏色 Color	White

Available						
ON/OFF						
TRIAC						
0-10V						
DALI						
PLC						

PANEL SERIES


GL-JL-KMTH600X600 LED直下式面板燈

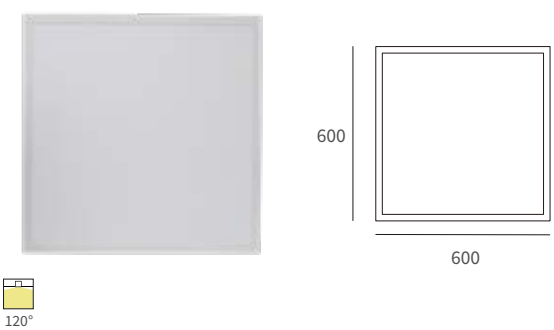

功率 Watts	40W (Meter)
色溫 Color temperature	4000K/6000K
光效 Light efficiency	150lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥80
電壓 Voltage	AC 100/277V
顏色 Color	White
Available	PLC



GL-JL-KMTH600X1200 LED直下式面板燈

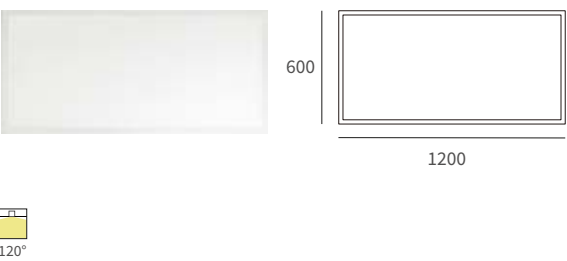


功率 Watts	48W (Meter)
色溫 Color temperature	4000K/6000K
光效 Light efficiency	150lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥80
電壓 Voltage	AC 100/277V
顏色 Color	White
Available	PLC





INSTALLING SWITCH 安裝方式

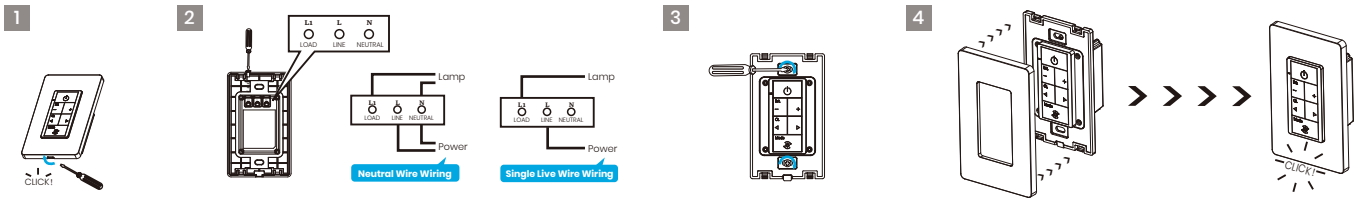


1 Open the front cover with a small flat head screwdriver.
使用小型平頭螺絲起子打開前蓋。

2 Connect the wire to the terminals as needed and tighten the screws.
It is necessary to connect all wires to the appropriate connectors.
根據需要將電線連接到端子，並擰緊螺絲。必須將所有電線連接到相應的接頭上。

3 Fix the switch chassis to the mounting bracket or box using
supplied screws as shown after wire connected.
在電線連接完成後，使用隨附的螺絲將開關底座固定在安裝支架或安裝盒上。


4 Reattach the face plate securely.
將面板重新牢固地安裝回去。

GL-PLC LED雙色溫直下式面板燈600*600

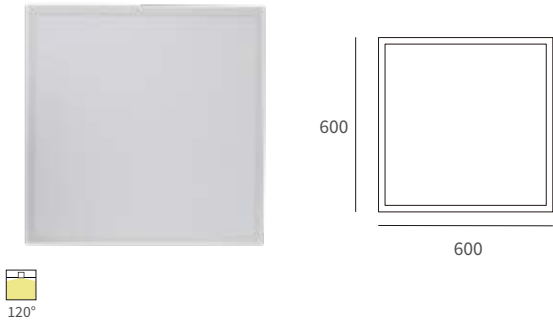


功率 Watts	40W (Meter)
色溫 Color temperature	2700K - 6500K
光效 Light efficiency	150lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥80
電壓 Voltage	AC 110/220V
顏色 Color	White
Available PLC	    

GL-PLC LED雙色溫直下式面板燈600*1200

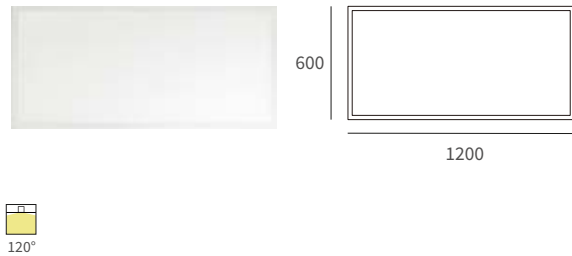


功率 Watts	72W (Meter)
色溫 Color temperature	2700K - 6500K
光效 Light efficiency	150lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥80
電壓 Voltage	AC 100-277V
顏色 Color	White
Available PLC	    

GL-PLC 800W LED雙色溫平板燈壁切開關面板

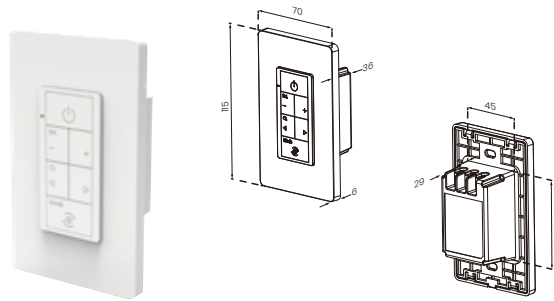

功率 Watts	800W (Meter)
色溫 Color temperature	2700K - 6500K
光效 Light efficiency	150lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥80
電壓 Voltage	AC 120V(Max:800W) - 277V(Max:1600W)
顏色 Color	White
Available PLC	

GL-PLC 1100W LED雙色溫平板燈壁切開關面板

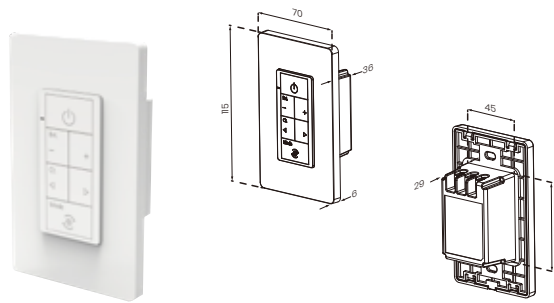

功率 Watts	1100W (Meter)
色溫 Color temperature	2700K - 6500K
光效 Light efficiency	150lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥80
電壓 Voltage	AC 120V(Max:1100W) - 277V(Max:2200W)
顏色 Color	White
Available PLC	



SKYLINE SERIES

"Every atmosphere, every place, becomes a piece of art"

Using the extraordinary light of the skyline to paint. It is a continuous band of indirect light that cuts through space like a shining blade.

The skyline is a very thin band, only 20mm wide, made by stainless steel.

You can adapt it to any space, place it anywhere you want, extend it from wall to wall, or extend it from ceiling to floor.

“每一個氛圍，每一個地方，都成為一件藝術品”，用天際線的非凡光芒作畫。它是一條連續的間接光帶，像閃亮的刀片一樣穿過空間。

天際線是一條非常細的帶子，只有 20 毫米寬，由不銹鋼製成。

您可以將其適應任何空間，將其放置在您想要的任何位置，將其從牆壁延伸到牆壁，或將其從天花板延伸到地板。

GL-SKYLINE

LED 2.0天際線

-W:白色 -B:黑色



120°

功率 Watts	11W/1.5M/2M 14.4W/0.5M/1M
色溫 Color temperature	3000K / 3500K / 4000K / 5000K / 2700K-6000K / RGB(W:OPTION)
光效 Light efficiency	80lm/W
角度 Beam angle	120°
顯指 Color rendering index	≥90
電壓 Voltage	DC24V
顏色 Color	White / Black

Available

ON/OFF

TRIAC


0-10V

DALI


PLC




DIMENSION

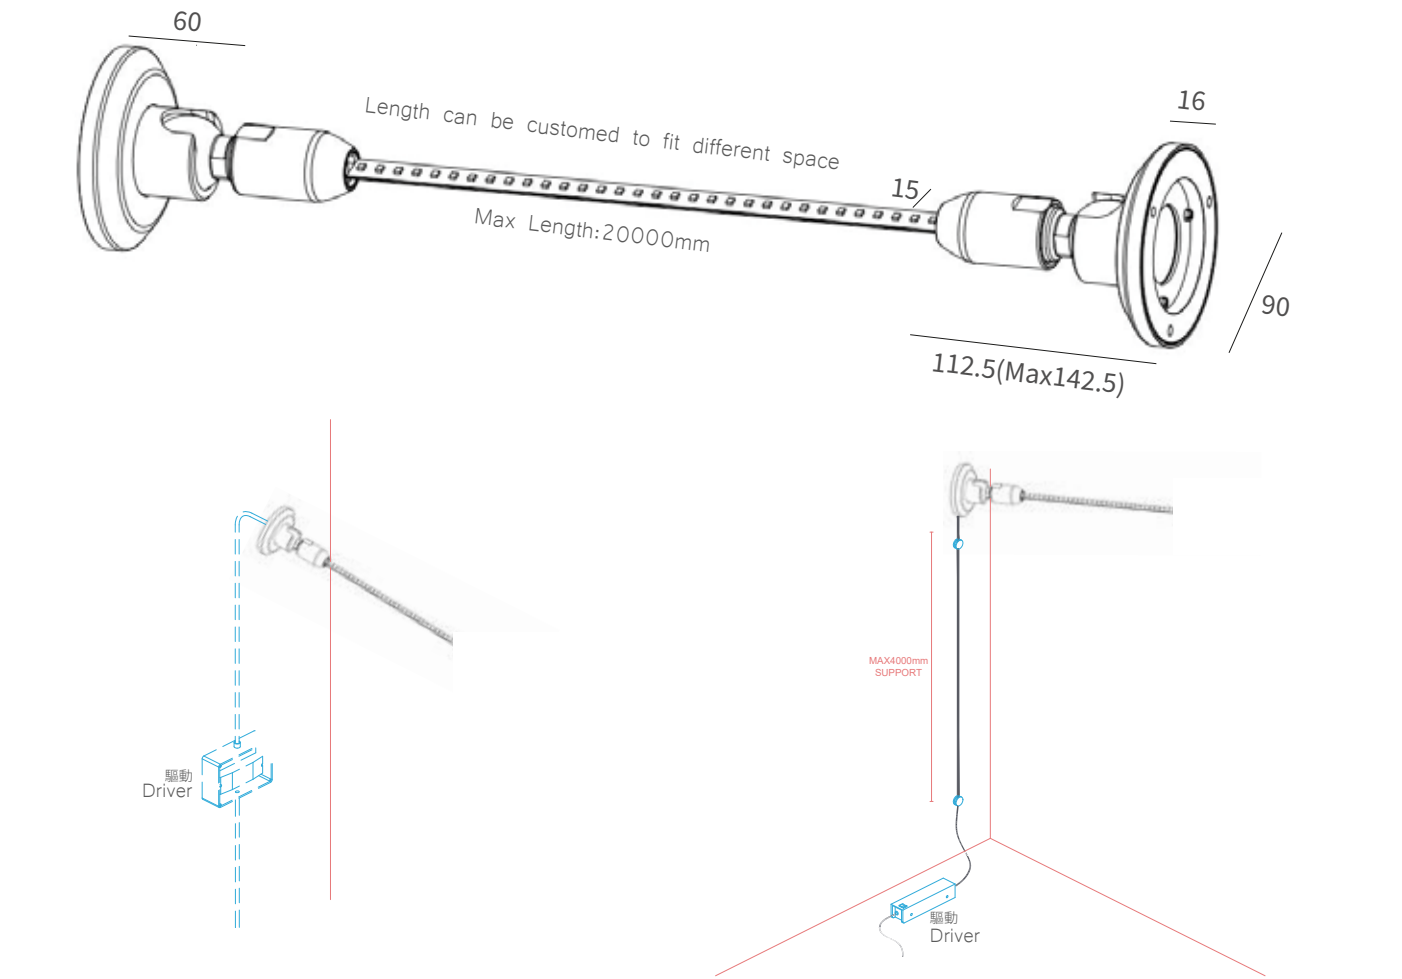

LIGHTING GUIDE

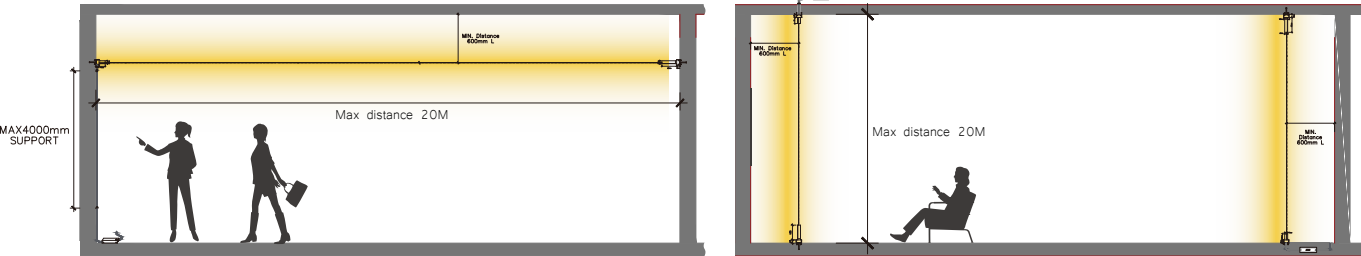

INSTALLATION MODE

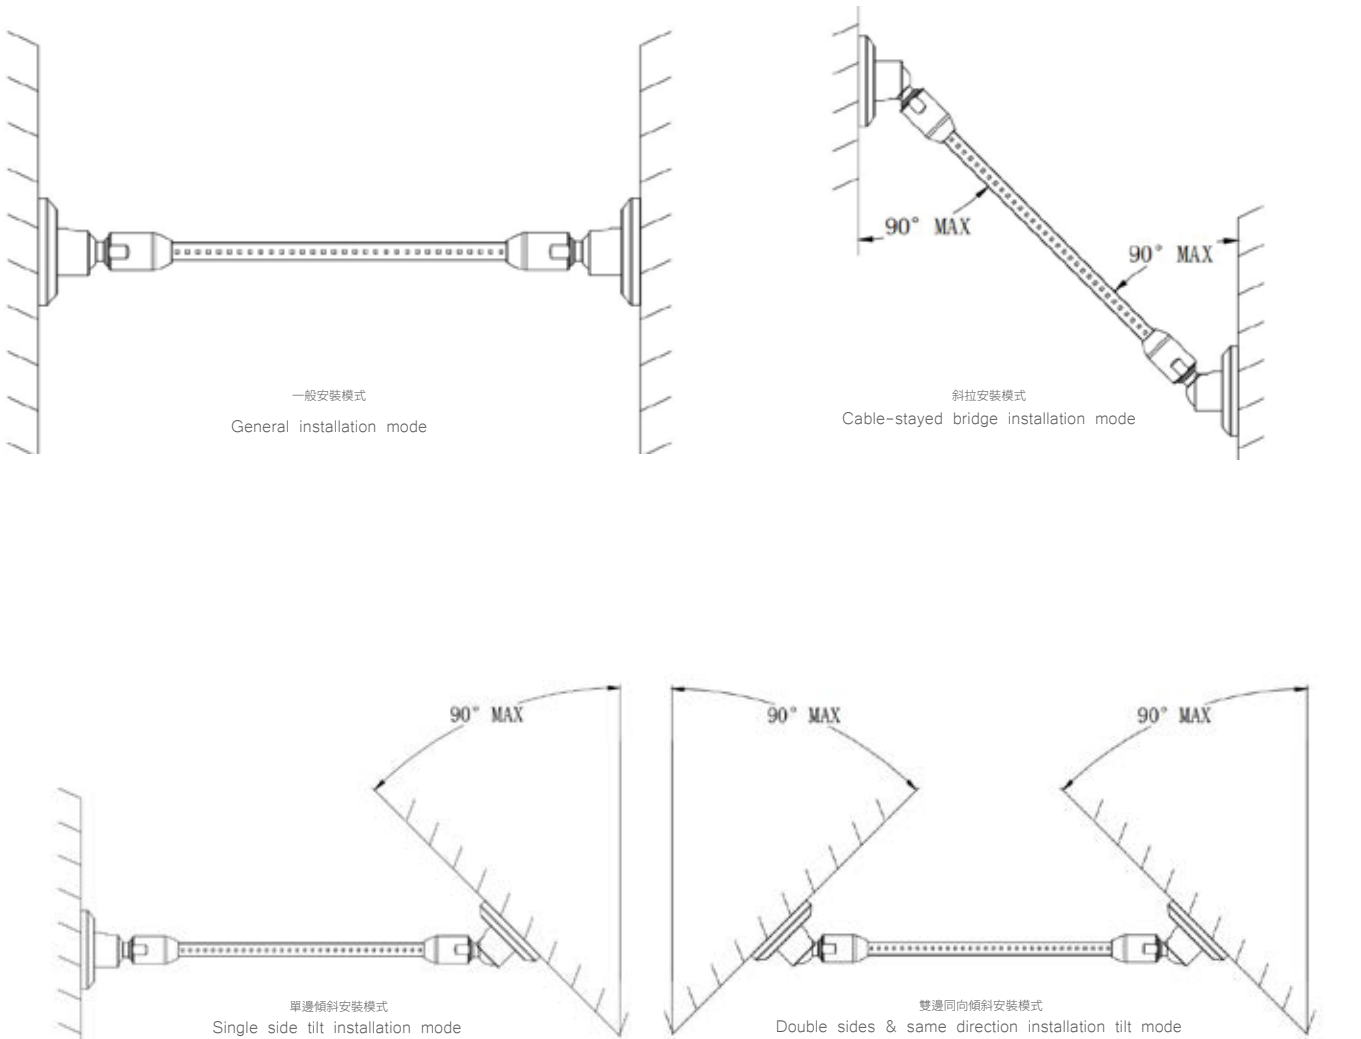


INSTALLATION GUIDE


- Make sure the installation position is reinforced concrete wall, solid wood wall or other wall of bearing tension.
- Determine the installation center position of the system and make marks on the wall.
- Measure the distance of center position for mounting bracket from one side to the other side, record the data for next using.
- Make sure there will be low-voltage power supply or external power supply available at the place where the mounting bracket (A) is installed.
- 確認安裝位置為鋼筋混凝土牆,實木牆等可以承拉的牆體;
- 確定燈具安裝的位置的中心點,並在牆上做上記號;
- 測量固定主體安裝位置的中心點到另一安裝位置中心點的距離並記下數值備用;
- 確認安裝固定主體A的位置有外接低壓電源或者可接外置電源;

一、主體A(接線端)安裝鋼帶
Install the steel belt onto the main body A (the terminal)


1. Take out the steel strip and measure the length,mark the location.
(the installation of the steel strip length should be 150mm shorter than the distance from two mounting center position)
取出鋼帶,用捲尺測量燈具底座安裝中心到安裝中心的距離(準備工作步驟標記下距離數值)-100mm並找到此位置,並做上標記
2. Cut off the extra steel strip with scissors along the mark.
沿著剛做好的記號用剪刀剪掉多餘的鋼帶。

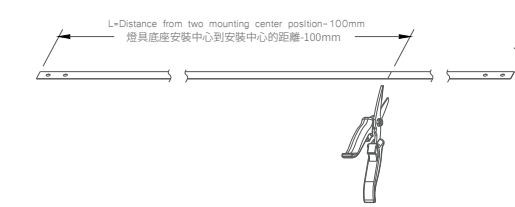

3. Remove the main body A from the packaging and disassemble it according to the drawings.
把主體A從包裝內取出,按照圖紙拆開。

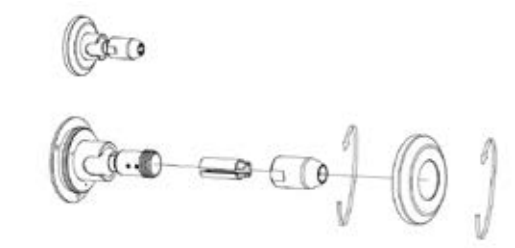


4. Thread the following three parts onto the steel belt.
把下面3個零件串入鋼帶。

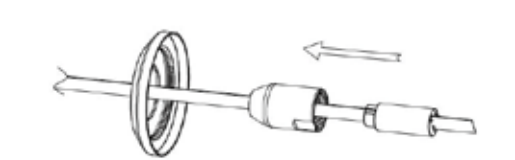

5. Use pliers to fold back the front end of the steel belt.
用鉗子把鋼帶前端折回。



6. Insert the steel belt into the connector.
把鋼帶插入連接器內。

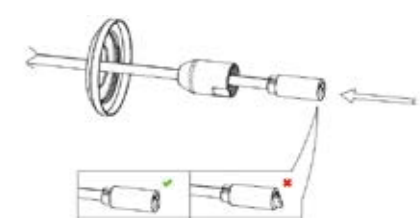

7. Install as shown in the diagram.
如圖安裝。



8. Rotate until it aligns with the end of the thread.
旋轉到與螺紋末端對齊。




9. Pass the electrical wire through the base, ensuring the length of the light strip wire is greater than 150 mm.
將電線穿入底座,燈帶線長要求大於150mm。




INSTALLATION GUIDE

二、安裝燈帶到鋼帶上
Install the LED Strip light on to the steel strip


9. Pass the electrical wire through the base, ensuring the length of the light strip wire is greater than 150 mm.
將電線穿入底座,燈帶線長要求大於150mm。

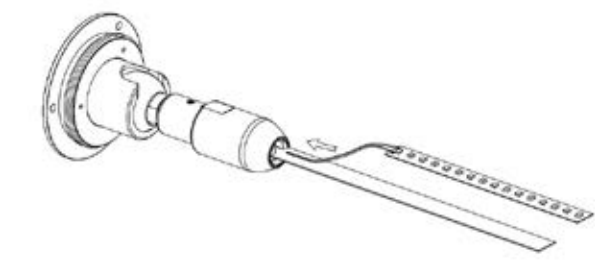

10. Peel off the release paper from the 3M tape. Note: Do not peel it off all at once.
撕開3M膠帶上的離心紙,注意:不能一次性撕下。

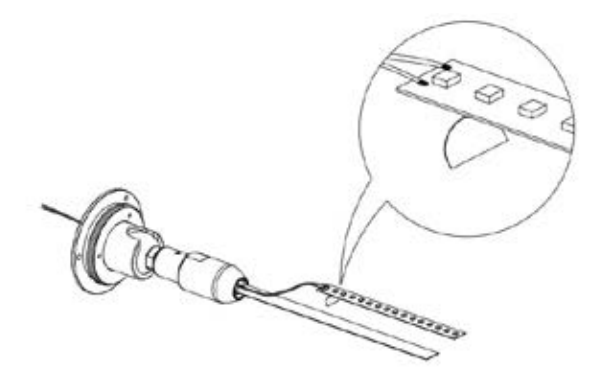


11. Attach the light strip to the steel belt.
將燈帶貼到鋼帶上。

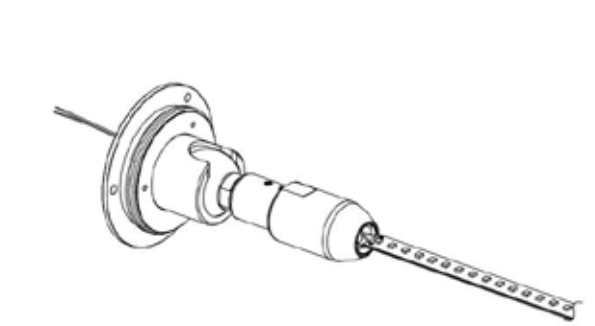

三、主體A(接線端)安裝到牆面上,測試並調節
Install the main body A (wiring end) onto the wall, test, and adjust as necessary.


12. Connect the wiring and tighten the wood screws.
接線、鎖上木螺釘。

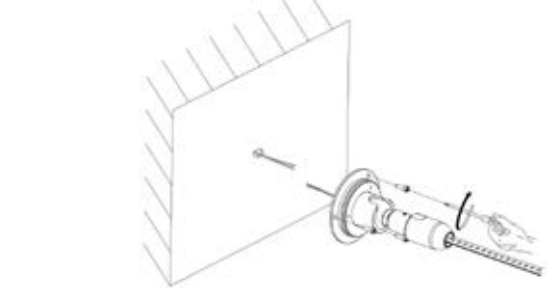


13. Power it on to verify if the light illuminates.
通電驗證是否亮燈。



14. Rotate the base casing onto the base.
將底座外殼旋轉到底坐上。

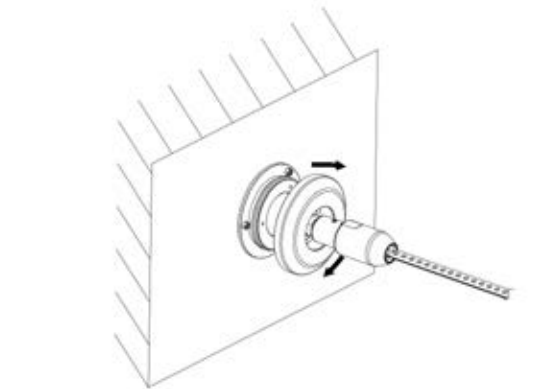

15. Wiring end installation completed.
接線端安裝完畢。

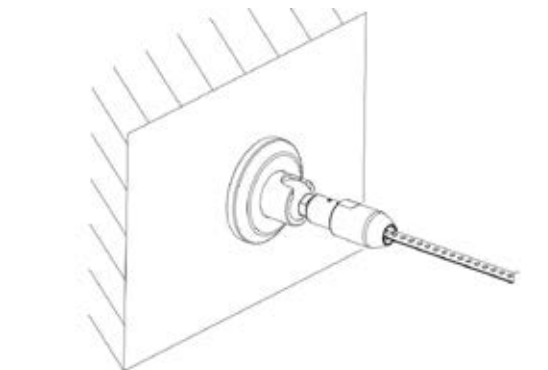


INSTALLATION MODE

- Make sure the installation position is reinforced concrete wall, solid wood wall or other wall of bearing tension.
- Determine the installation center position of the system and make marks on the wall.
- Measure the distance of center position for mounting bracket from one side to the other side, record the data for next using.
- Make sure there will be low-voltage power supply or external power supply available at the place where the mounting bracket (A) is installed.
- 確認安裝位置為鋼筋混凝土牆,實木牆等可以承拉的牆體;
- 確定燈具安裝的位置的中心點,並在牆上做上記號;
- 測量固定主體安裝位置的中心點到另一安裝位置中心點的距離並記下數值備用;
- 確認安裝固定主體A的位置有外接低壓電源或者可接外置電源;

四、主體B(非接線端)安裝鋼帶

Install the steel strip onto main body B (non-wiring end).


16. Take out main body B from the packaging and disassemble it according to the drawings.
把主體B從包裝內取出,按照圖紙拆開。

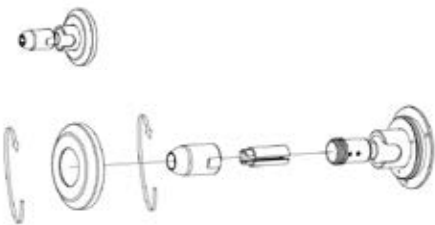


20. Install as shown in the diagram.
如圖安裝。




17. Thread the following three parts onto the steel belt.
把下面3個零件串入鋼帶。



18. Use pliers to fold back the front end of the steel belt.
用鉗子把鋼帶前端折回。

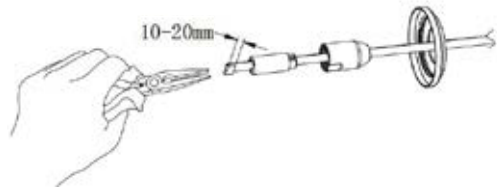


19. Insert the steel belt into the connector.
把鋼帶插入連接器內。

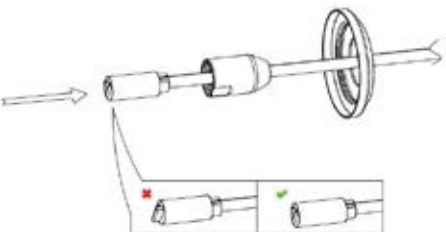


21. Rotate until it aligns with the end of the thread.
旋轉到與螺紋末端對齊。



22. Peel off the release paper from the 3M tape. Note: Do not peel it off all at once.
撕開3M膠帶上的離心紙。注意：不能一次性撕下。

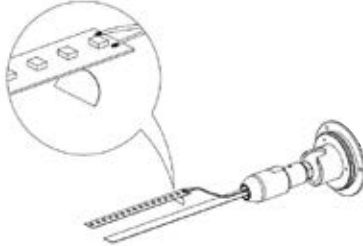

23. Attach the light strip to the steel belt.
將燈帶貼到鋼帶上。

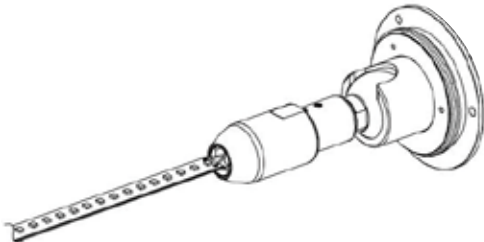


INSTALLATION MODE


五、主體B(非接線端)安裝到牆面上

Install the LED Strip light on to the steel strip


24. Connect the wiring and tighten the wood screws.
接線、鎖上木螺釘。

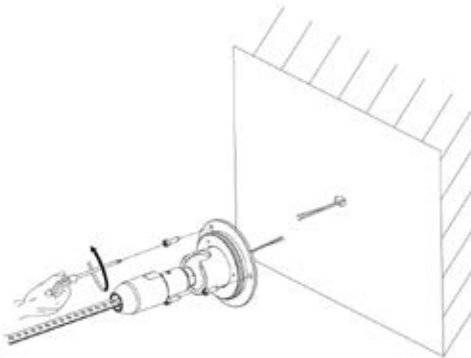

25. Rotate the base casing onto the base.
將底座外殼旋轉到底坐上。

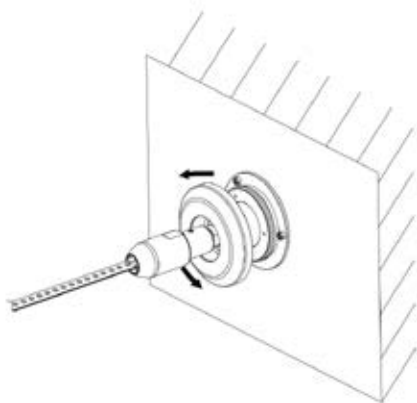


26. Remove the set screw of guide rail groove.
非接線端安裝完畢。

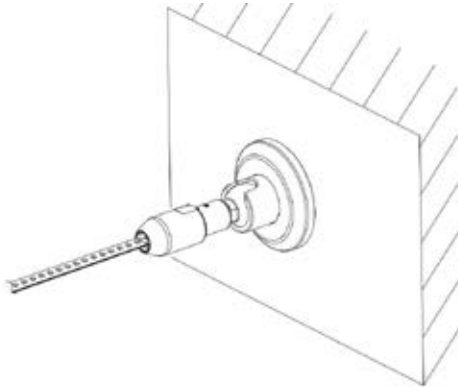

六、SKYLINE 安裝完成

Mount the mounting bracket (A & B) on the wall

26. Use a 17mm hole spanner and a 30mm hole spanner to rotate and straighten the steel strip at both ends of the joint.
用開孔17mm的扳手與開孔30mm的扳手旋轉鋼帶兩端接頭拉直鋼帶。

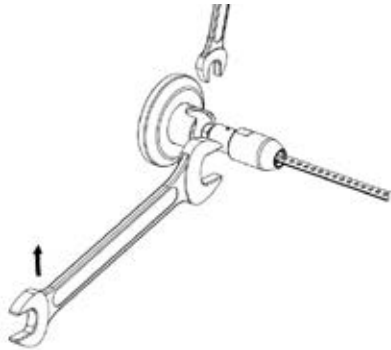

28. The steel strip is straightened, and the electrical connection is completed.
鋼帶拉直,通電完成。



GREAT LIGHTING

Catalogue Vol 24

浙江省嘉兴市嘉善县台升大道3号信息科技城B区21幢
Building 21, Zone B, Information Technology City, No. 3 Taisheng Avenue,
Jiashan County, Zhejiang Province

台中市南屯區大墩四街325號
No. 325, Dadun 4th St., Nantun Dist., Taichung City 408028 , Taiwan (R.O.C.)
